



US008701860B1

(12) **United States Patent**  
**Blake et al.**

(10) **Patent No.:** **US 8,701,860 B1**  
(45) **Date of Patent:** **Apr. 22, 2014**

(54) **COIN PROCESSING SYSTEMS, METHODS AND DEVICES**

(56) **References Cited**

(71) Applicant: **Cummins-Allison Corp.**, Mt. Prospect, IL (US)

U.S. PATENT DOCUMENTS

1,099,706 A \* 6/1914 Lindeen, Frank ..... 141/298  
2,570,920 A 10/1951 Clough et al. .... 232/16  
2,669,998 A 2/1954 Buchholz ..... 133/8

(Continued)

(72) Inventors: **John R. Blake**, St. Charles, IL (US);  
**Curtis W. Hallowell**, Palatine, IL (US);  
**Marianne Krbec**, Wood Dale, IL (US);  
**William J. Jones**, Barrington, IL (US);  
**Thomas P. Adams**, Oconomowoc, WI (US)

FOREIGN PATENT DOCUMENTS

CA 2235925 C 11/1995 ..... G07D 9/00  
CA 2189330 C 12/2000 ..... G07F 17/42

(Continued)

(73) Assignee: **Cummins-Allison Corp.**, Mt. Prospect, IL (US)

OTHER PUBLICATIONS

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

Amiel Industries: AI-1500 'Pulsar' High Performance Sorting and Bagging Machine, 13 pages (date unknown, but prior to Dec. 14, 2000).

(Continued)

(21) Appl. No.: **13/942,892**

*Primary Examiner* — Mark Beauchaine

(22) Filed: **Jul. 16, 2013**

(74) *Attorney, Agent, or Firm* — Nixon Peabody LLP

**Related U.S. Application Data**

(62) Division of application No. 13/327,900, filed on Dec. 16, 2011.

(60) Provisional application No. 61/424,549, filed on Dec. 17, 2010, provisional application No. 61/506,852, filed on Jul. 12, 2011.

(51) **Int. Cl.**  
**G07F 1/04** (2006.01)  
**B65B 67/04** (2006.01)

(52) **U.S. Cl.**  
USPC ..... **194/350**; 193/DIG. 1; 248/99; 211/71.01


(58) **Field of Classification Search**  
USPC ..... 194/350, 344, 351, 353; 193/2 R, 34, 193/44, DIG. 1; 248/95, 97, 98, 99, 101; 211/71.01, 85.15

See application file for complete search history.

(57) **ABSTRACT**

Systems, methods and devices for processing coins are presented herein. A coin processing system is disclosed which includes a housing with a coin input area for receiving a batch of coins, a controller with a communication interface operatively attached to the housing, and a coin processing unit for counting, discriminating, and/or valuing coins received from the coin input area. The coin processing system also includes a mobile coin receptacle removably disposed within the housing and configured to receive coins from the coin processing unit. The mobile coin receptacle is configured to wirelessly communicate information to the communication interface of the controller. The mobile coin receptacle can include one or more electrical contacts that mate with one or more electrical contacts on the housing to wirelessly communicate the information.

**34 Claims, 29 Drawing Sheets**

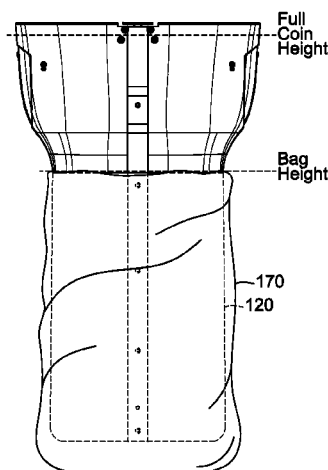

(56)

## References Cited

## U.S. PATENT DOCUMENTS

2,750,949 A	6/1956	Kulo et al.	133/8	4,812,629 A	3/1989	O'Neil et al.	235/383
2,835,260 A	5/1958	Buchholz	133/8	4,839,505 A	6/1989	Bradt et al.	235/381
2,865,561 A	12/1958	Rosapepe	232/7	4,844,369 A	7/1989	Kanayachi	242/56 R
3,132,654 A	5/1964	Adams	133/1	4,848,556 A	7/1989	Shah et al.	194/212
3,376,970 A	4/1968	Roseberg	198/40	4,863,414 A	9/1989	Ristvedt et al.	453/6
3,771,583 A	11/1973	Bottemiller	160/327	4,883,158 A	11/1989	Kobayashi et al.	194/217
3,778,595 A	12/1973	Hatanaka et al.	235/61.7 B	4,884,212 A	11/1989	Stutsman	364/479
3,916,922 A	11/1975	Prumm	133/3 R	4,900,909 A	2/1990	Nagashima et al.	235/487
3,998,237 A	12/1976	Kressin	133/3 A	4,908,516 A	3/1990	West	250/556
3,998,379 A	12/1976	Myers et al.	229/33	4,921,463 A	5/1990	Primdahl et al.	453/3
4,050,218 A	9/1977	Call	53/167	4,936,435 A	6/1990	Griner	194/317
4,059,122 A	11/1977	Kinoshita	133/3 D	4,953,086 A	8/1990	Fukatsu	364/408
4,075,460 A	2/1978	Gorgens	235/420	4,954,697 A	9/1990	Kokubun et al.	235/381
4,124,111 A	11/1978	Hayashi	194/102	4,964,495 A	10/1990	Rasmussen	194/344
4,150,740 A	4/1979	Douno	194/4 C	4,966,570 A	10/1990	Ristvedt et al.	453/6
4,166,945 A	9/1979	Inoyama et al.	235/379	4,970,655 A	11/1990	Winn et al.	364/479
4,172,462 A	10/1979	Uchida et al.	133/3 A	4,971,187 A	11/1990	Furuya et al.	194/318
4,179,685 A	12/1979	O'Maley	340/146.3 H	4,988,849 A	1/1991	Sasaki et al.	235/379
4,179,723 A	12/1979	Spencer	361/384	4,992,647 A	2/1991	Konishi et al.	235/379
4,184,366 A	1/1980	Butler	73/163	4,995,848 A	2/1991	Goh	453/3
4,197,986 A	4/1980	Nagata	235/379	5,009,627 A	4/1991	Rasmussen	453/10
4,208,549 A	6/1980	Polillo et al.	179/6.3 R	5,010,238 A	4/1991	Kadono et al.	235/379
4,228,812 A	10/1980	Marti	133/3 F	5,010,485 A	4/1991	Bigari	364/408
4,232,295 A	11/1980	McConnell	340/152 R	5,011,455 A	4/1991	Rasmussen	453/10
4,234,003 A	11/1980	Ristvedt et al.	133/3	5,022,889 A	6/1991	Ristvedt et al.	453/6
4,249,552 A	2/1981	Margolin et al.	133/1 R	5,025,139 A	6/1991	Halliburton, Jr.	235/379
4,251,867 A	2/1981	Uchida et al.	364/408	5,026,320 A	6/1991	Rasmussen	453/6
4,286,703 A	9/1981	Schuller et al.	194/100 A	5,031,098 A	7/1991	Miller et al.	364/405
RE30,773 E	10/1981	Glaser et al.	235/379	5,033,602 A	7/1991	Saarinan et al.	194/334
4,310,885 A	1/1982	Azcua et al.	364/405	5,039,848 A	8/1991	Stoken	235/381
4,317,957 A	3/1982	Sendrow	178/22.08	5,055,086 A	10/1991	Rateman et al.	453/10
4,341,951 A	7/1982	Benton	235/379	5,055,657 A	10/1991	Miller et al.	235/381
4,355,369 A	10/1982	Garvin	364/900	5,064,999 A	11/1991	Okamoto et al.	235/379
4,360,034 A	11/1982	Davila et al.	133/3 D	5,080,633 A	1/1992	Ristvedt et al.	435/6
4,369,442 A	1/1983	Werth et al.	340/825.35	5,091,713 A	2/1992	Horne et al.	340/541
4,380,316 A	4/1983	Glinka et al.	232/16	5,104,353 A	4/1992	Ristvedt et al.	453/6
4,383,540 A	5/1983	De Meyer et al.	133/3 H	5,105,601 A	4/1992	Horiguchi et al.	53/465
4,385,285 A	5/1983	Horst et al.	382/3	5,106,338 A	4/1992	Rasmussen et al.	453/10
4,412,292 A	10/1983	Sedam et al.	364/479	5,111,927 A	5/1992	Schulze	194/209
4,416,299 A	11/1983	Bergman	133/1 R	5,114,381 A	5/1992	Ueda et al.	453/57
4,417,136 A	11/1983	Rushby et al.	235/379	5,120,945 A	6/1992	Nishibe et al.	235/379
4,423,316 A	12/1983	Sano et al.	235/379	5,123,873 A	6/1992	Rasmussen	453/10
4,434,359 A	2/1984	Watanabe	235/379	5,129,205 A	7/1992	Rasmussen	53/52
4,436,103 A	3/1984	Dick	133/3 D	5,135,435 A	8/1992	Rasmussen	453/56
4,454,414 A	6/1984	Benton	235/379	5,140,517 A	8/1992	Nagata et al.	364/408
4,474,197 A	10/1984	Kinoshita et al.	133/4 A	5,141,443 A	8/1992	Rasmussen et al.	453/10
4,488,116 A	12/1984	Plesko	324/236	5,141,472 A	8/1992	Todd et al.	453/10
4,531,531 A	7/1985	Johnson et al.	133/3	5,145,455 A	9/1992	Todd	453/6
4,543,969 A	10/1985	Rasmussen	133/3	5,146,067 A	9/1992	Sloan et al.	235/381
4,549,561 A	10/1985	Johnson et al.	133/3	5,154,272 A	10/1992	Nishiumi et al.	194/318
4,556,140 A	12/1985	Okada	194/4 C	5,163,866 A	11/1992	Rasmussen	453/10
4,558,711 A	12/1985	Yoshiaki et al.	133/3 F	5,163,867 A	11/1992	Rasmussen	453/10
4,564,036 A	1/1986	Ristvedt	133/3	5,163,868 A	11/1992	Adams et al.	453/11
4,570,655 A	2/1986	Rateman	133/3	5,167,313 A	12/1992	Dobbins et al.	194/317
4,594,664 A	6/1986	Hashimoto	364/405	5,175,416 A	12/1992	Mansvelt et al.	235/379
4,602,332 A	7/1986	Hirose et al.	364/408	5,176,565 A	1/1993	Ristvedt et al.	453/6
4,607,649 A	8/1986	Taipale et al.	133/3 C	5,179,517 A	1/1993	Sarbin et al.	364/410
4,620,559 A	11/1986	Childers et al.	133/3 R	5,183,142 A	2/1993	Latchinian et al.	194/206
4,641,239 A	2/1987	Takesako	364/408	5,184,709 A	2/1993	Nishiumi et al.	194/318
4,674,260 A	6/1987	Rasmussen et al.	53/212	5,194,037 A	3/1993	Jones et al.	453/10
4,681,128 A	7/1987	Ristvedt et al.	453/6	5,197,919 A	3/1993	Geib et al.	453/10
4,705,154 A	11/1987	Masho et al.	194/319	5,205,780 A	4/1993	Rasmussen	453/10
4,718,218 A	1/1988	Ristvedt	53/532	5,207,784 A	5/1993	Schwartzendruber	221/6
4,731,043 A	3/1988	Ristvedt et al.	453/6	5,209,696 A	5/1993	Rasmussen et al.	453/10
4,733,765 A	3/1988	Watanabe	194/206	5,236,071 A	8/1993	Lee	194/200
4,749,074 A	6/1988	Ueki et al.	194/317	5,243,174 A	9/1993	Veeneman et al.	235/381
4,753,624 A	6/1988	Adams et al.	453/10	5,251,738 A	10/1993	Dabrowski	194/206
4,753,625 A	6/1988	Okada	453/32	5,252,811 A	10/1993	Henochowicz et al.	235/379
4,765,464 A	8/1988	Ristvedt	206/0.82	5,253,167 A	10/1993	Yoshida et al.	364/408
4,766,548 A	8/1988	Cedrone et al.	364/479	5,263,566 A	11/1993	Nara et al.	194/318
4,775,353 A	10/1988	Childers et al.	453/6	5,265,874 A	11/1993	Dickinson et al.	273/138 A
4,775,354 A	10/1988	Rasmussen et al.	453/10	5,268,561 A	12/1993	Kimura et al.	235/384
4,778,983 A	10/1988	Ushikubo	235/381	5,277,651 A	1/1994	Rasmussen et al.	453/10
4,803,347 A	2/1989	Sugahara et al.	235/379	5,282,127 A	1/1994	Mii	364/130
4,804,830 A	2/1989	Miyagisima et al.	235/379	5,286,226 A	2/1994	Rasmussen	453/10
				5,286,954 A	2/1994	Sato et al.	235/379
				5,291,003 A	3/1994	Avnet et al.	235/381
				5,291,560 A	3/1994	Daugman	382/2
				5,293,981 A	3/1994	Abe et al.	194/345

(56)

## References Cited

## U.S. PATENT DOCUMENTS

5,297,030 A	3/1994	Vassigh et al.	364/405	5,892,211 A	4/1999	Davis et al.	235/380
5,297,598 A *	3/1994	Rasmussen	141/314	5,892,827 A	4/1999	Beach et al.	380/24
5,297,986 A	3/1994	Ristvedt et al.	453/6	5,909,793 A	6/1999	Beach et al.	194/210
5,299,977 A	4/1994	Mazur et al.	453/10	5,909,794 A	6/1999	Molbak et al.	194/216
5,324,922 A	6/1994	Roberts	235/375	5,913,399 A	6/1999	Takemoto et al.	194/200
5,326,104 A	7/1994	Pease et al.	273/138 A	5,918,748 A	7/1999	Clark et al.	209/534
5,370,575 A	12/1994	Geib et al.	453/3	5,940,623 A	8/1999	Watts et al.	395/712
5,372,542 A	12/1994	Geib et al.	453/10	5,944,162 A	8/1999	Filiberti	194/204
5,374,814 A	12/1994	Kako et al.	235/379	5,944,600 A	8/1999	Zimmermann	435/10
5,379,344 A	1/1995	Larsson et al.	380/23	5,951,476 A	9/1999	Beach et al.	600/437
5,379,875 A	1/1995	Shames et al.	194/317	5,957,262 A	9/1999	Molbak et al.	194/200
5,382,191 A	1/1995	Rasmussen	453/11	5,988,348 A	11/1999	Martin et al.	194/317
5,390,776 A	2/1995	Thompson	194/346	5,995,949 A	11/1999	Morioka et al.	705/43
5,401,211 A	3/1995	Geib et al.	453/10	5,997,395 A	12/1999	Geib et al.	453/10
5,404,986 A	4/1995	Hossfield et al.	194/317	6,017,270 A	1/2000	Ristvedt et al.	453/5
5,410,590 A	4/1995	Blood et al.	379/147	6,021,883 A	2/2000	Casanova et al.	194/217
RE34,934 E	5/1995	Rateman et al.	453/10	6,032,859 A	3/2000	Muehlberger et al.	235/449
5,425,669 A	6/1995	Geib et al.	453/10	6,039,644 A	3/2000	Geib et al.	453/10
5,429,550 A	7/1995	Mazur et al.	453/10	6,039,645 A	3/2000	Mazur	453/10
5,440,108 A	8/1995	Tran et al.	235/381	6,042,470 A	3/2000	Geib et al.	453/10
5,443,419 A *	8/1995	Adams et al.	453/17	6,047,807 A	4/2000	Molbak	194/217
5,450,938 A	9/1995	Rademacher	194/206	6,047,808 A	4/2000	Neubarth et al.	194/317
5,453,047 A	9/1995	Mazur et al.	453/10	6,056,104 A	5/2000	Neubarth et al.	194/317
5,468,182 A	11/1995	Geib	453/10	6,080,056 A	6/2000	Karlsson	453/3
5,470,079 A	11/1995	LeStrange et al.	273/138 A	6,082,519 A	7/2000	Martin et al.	194/350
5,474,495 A	12/1995	Geib et al.	453/3	6,086,471 A	7/2000	Zimmermann	453/3
5,474,497 A	12/1995	Jones et al.	453/17	6,095,313 A	8/2000	Molbak et al.	194/344
5,480,348 A	1/1996	Mazur et al.	453/10	6,116,402 A	9/2000	Beach et al.	194/216
5,489,237 A	2/1996	Geib et al.	453/12	6,131,625 A *	10/2000	Casanova et al.	141/314
5,500,514 A	3/1996	Veeneman et al.	235/381	6,139,418 A	10/2000	Geib et al.	453/10
5,501,631 A	3/1996	Mennie et al.	453/3	6,142,285 A	11/2000	Panzeri et al.	194/328
5,507,379 A	4/1996	Mazur et al.	194/318	6,145,738 A	11/2000	Stinson et al.	235/379
5,514,034 A	5/1996	Jones et al.	453/10	6,154,879 A	11/2000	Pare, Jr. et al.	902/3
5,520,577 A	5/1996	Rasmussen	453/56	6,168,001 B1	1/2001	Davis	194/200
5,531,309 A	7/1996	Kloss et al.	194/202	6,171,182 B1	1/2001	Geib et al.	453/10
5,538,468 A	7/1996	Ristvedt et al.	453/3	6,174,230 B1	1/2001	Gerrity et al.	453/57
5,542,880 A	8/1996	Geib et al.	453/10	6,196,371 B1	3/2001	Martin et al.	194/317
5,542,881 A	8/1996	Geib	453/10	6,196,913 B1	3/2001	Geib et al.	453/10
5,553,320 A	9/1996	Matsuura et al.	235/379	6,202,006 B1 *	3/2001	Scott	700/231
5,559,887 A	9/1996	Davis et al.	380/24	6,213,277 B1	4/2001	Blad et al.	194/350
5,564,546 A	10/1996	Molbak et al.	194/216	6,230,928 B1	5/2001	Hanna et al.	221/13
5,564,974 A	10/1996	Mazur et al.	453/10	6,264,545 B1	7/2001	Magee et al.	453/3
5,564,978 A	10/1996	Jones et al.	453/17	6,308,887 B1	10/2001	Korman et al.	235/379
5,570,465 A	10/1996	Tsakanikas	395/114	6,318,536 B1	11/2001	Korman et al.	194/217
5,573,457 A	11/1996	Watts et al.	453/31	6,318,537 B1	11/2001	Jones et al.	194/346
5,584,758 A	12/1996	Geib	453/10	6,349,972 B1	2/2002	Geiger et al.	283/67
5,592,377 A	1/1997	Lipkin	395/242	6,412,620 B1	7/2002	Imura	194/317
5,602,933 A	2/1997	Blackwell et al.	382/116	6,431,342 B1	8/2002	Schwartz	194/346
5,620,079 A	4/1997	Molbak	194/217	6,438,230 B1	8/2002	Moore	380/42
5,623,547 A	4/1997	Jones et al.	380/24	6,456,928 B1	9/2002	Johnson	701/114
5,625,562 A	4/1997	Veeneman et al.	364/479.05	6,471,030 B1	10/2002	Neubarth et al.	194/317
5,630,494 A	5/1997	Strauts	194/317	6,474,548 B1	11/2002	Montross et al.	235/379
5,641,050 A	6/1997	Smith et al.	194/210	6,484,863 B1	11/2002	Molbak	194/216
5,650,605 A	7/1997	Morioka et al.	235/379	6,484,884 B1	11/2002	Gerrity et al.	209/233
5,650,761 A	7/1997	Gomm et al.	235/381	6,494,776 B1	12/2002	Molbak	453/32
5,652,421 A	7/1997	Veeneman et al.	235/381	6,499,277 B1	12/2002	Warner et al.	53/447
5,665,952 A	9/1997	Ziarno	235/380	6,503,138 B2	1/2003	Spoehr et al.	453/10
5,679,070 A	10/1997	Ishida et al.	453/41	6,520,308 B1	2/2003	Martin et al.	194/317
5,684,597 A	11/1997	Hossfield et al.	356/384	6,522,772 B1	2/2003	Morrison et al.	382/124
5,696,366 A	12/1997	Ziarno	235/380	6,547,131 B1	4/2003	Foodman et al.	235/380
5,743,373 A	4/1998	Strauts	194/318	6,552,781 B1	4/2003	Rompel et al.	256/71
5,746,299 A	5/1998	Molbak et al.	194/200	6,554,185 B1	4/2003	Montross et al.	235/379
5,774,874 A	6/1998	Veeneman et al.	705/27	6,579,165 B2	6/2003	Kuhlin et al.	453/3
5,782,686 A	7/1998	Geib et al.	453/10	6,581,042 B2	6/2003	Pare, Jr. et al.	705/40
5,799,767 A	9/1998	Molbak	194/217	6,602,125 B2	8/2003	Martin	453/12
5,813,510 A	9/1998	Rademacher	194/206	6,609,604 B1	8/2003	Jones et al.	194/302
5,823,315 A	10/1998	Hoffman et al.	194/203	6,612,921 B2	9/2003	Geib et al.	453/13
5,830,054 A	11/1998	Petri	453/5	6,637,576 B1	10/2003	Jones et al.	194/216
5,838,812 A	11/1998	Pare, Jr. et al.	382/115	6,640,956 B1	11/2003	Zwieg et al.	194/328
5,842,188 A	11/1998	Ramsey et al.	705/416	6,644,696 B2	11/2003	Brown et al.	283/67
5,842,916 A	12/1998	Gerrity et al.	453/57	6,655,585 B2	12/2003	Shinn	235/382
5,850,076 A	12/1998	Morioka et al.	235/379	6,659,259 B2	12/2003	Knox et al.	194/217
5,854,581 A	12/1998	Mori et al.	235/379	6,662,166 B2	12/2003	Pare, Jr. et al.	705/39
5,865,673 A	2/1999	Geib et al.	453/10	6,663,675 B2	12/2003	Blake et al.	753/63
5,880,444 A	3/1999	Shibata et al.	235/379	6,666,318 B2	12/2003	Gerrity et al.	194/347
				6,755,730 B2	6/2004	Blake et al.	453/3
				6,758,316 B2	7/2004	Molbak	194/200
				6,761,308 B1	7/2004	Hanna et al.	235/379
				6,766,892 B2	7/2004	Martin et al.	194/317

(56)

## References Cited

## U.S. PATENT DOCUMENTS

6,783,452 B2	8/2004	Hino et al.	453/3	2002/0179401 A1	12/2002	Knox et al.	194/217
6,783,785 B1	8/2004	Raghavan et al.	426/489	2003/0004878 A1	1/2003	Akutsu et al.	705/43
6,786,398 B1	9/2004	Stinson et al.	235/379	2003/0013403 A1	1/2003	Blake et al.	453/60
6,854,581 B2	2/2005	Molbak	194/344	2003/0042110 A1	3/2003	Wilfong	194/302
6,854,640 B2	2/2005	Peklo	235/100	2003/0081824 A1	5/2003	Mennie et al.	382/135
6,863,168 B1	3/2005	Gerrity et al.	194/347	2003/0127299 A1	7/2003	Jones et al.	194/217
6,892,871 B2	5/2005	Strauts et al.	194/302	2003/0168309 A1	9/2003	Geib et al.	194/302
6,896,118 B2	5/2005	Jones et al.	194/217	2003/0168310 A1	9/2003	Strauts et al.	194/302
6,928,546 B1	8/2005	Nanavati et al.	713/186	2003/0182217 A1	9/2003	Chiles	705/35
6,950,810 B2	9/2005	Lapsley et al.	705/78	2003/0190882 A1	10/2003	Blake et al.	453/63
6,953,150 B2	10/2005	Shepley et al.	235/379	2003/0234153 A1	12/2003	Blake et al.	194/347
6,957,746 B2	10/2005	Martin et al.	221/131	2004/0055902 A1	3/2004	Peklo	206/0.815
6,966,417 B2	11/2005	Peklo et al.	194/344	2004/0092222 A1	5/2004	Kowalczyk et al.	453/12
6,976,570 B2	12/2005	Molbak	194/215	2004/0153406 A1	8/2004	Alarcon-Luther et al.	705/41
6,988,606 B2	1/2006	Geib et al.	194/334	2004/0153421 A1	8/2004	Robinson	705/75
6,991,530 B2	1/2006	Hino et al.	453/3	2004/0154899 A1	8/2004	Peklo et al.	193/33
7,004,831 B2	2/2006	Hino et al.	453/5	2004/0173432 A1	9/2004	Jones	194/216
7,014,029 B2	3/2006	Winters	194/302	2004/0188221 A1	9/2004	Carter	194/215
7,014,108 B2	3/2006	Sorenson et al.	235/381	2004/0199924 A1	10/2004	Ganesh et al.	719/313
7,017,729 B2	3/2006	Gerrity et al.	194/347	2004/0200691 A1	10/2004	Geib et al.	194/302
7,018,286 B2	3/2006	Blake et al.	453/61	2004/0256197 A1*	12/2004	Blake et al.	194/350
7,028,827 B1	4/2006	Molbak et al.	194/346	2005/0006197 A1	1/2005	Wendell et al.	194/302
7,036,651 B2	5/2006	Tam et al.	194/217	2005/0035140 A1	2/2005	Carter	221/195
7,083,036 B2	8/2006	Adams	194/223	2005/0040007 A1	2/2005	Geib et al.	194/302
7,113,929 B1	9/2006	Beach et al.	705/65	2005/0040225 A1	2/2005	Csulits et al.	235/379
7,131,580 B2	11/2006	Molbak	235/379	2005/0045450 A1	3/2005	Geib et al.	194/318
7,149,336 B2	12/2006	Jones et al.	382/135	2005/0067305 A1	3/2005	Bochonok et al.	206/8
7,152,727 B2	12/2006	Waechter	194/317	2005/0077142 A1	4/2005	Tam et al.	194/217
7,158,662 B2	1/2007	Chiles	382/135	2005/0087425 A1	4/2005	Peklo	194/350
7,188,720 B2	3/2007	Geib et al.	194/302	2005/0098625 A1	5/2005	Walker et al.	235/381
7,213,697 B2	5/2007	Martin et al.	194/317	2005/0108165 A1	5/2005	Jones et al.	705/43
7,243,773 B2	7/2007	Bochonok et al.	194/350	2005/0109836 A1	5/2005	Ben-Aissa	235/380
7,269,279 B2	9/2007	Chiles	382/135	2005/0121507 A1	6/2005	Brown et al.	235/379
7,303,119 B2	12/2007	Molbak	235/379	2005/0124407 A1	6/2005	Rowe	463/25
7,331,521 B2	2/2008	Sorenson et al.	235/381	2005/0156318 A1	7/2005	Douglas	257/761
7,337,890 B2	3/2008	Bochonok et al.	194/353	2005/0205654 A1	9/2005	Carter	235/7 R
7,427,230 B2	9/2008	Blake et al.	453/63	2005/0205655 A1	9/2005	Carter	235/7 R
7,438,172 B2	10/2008	Long et al.	194/347	2005/0228717 A1	10/2005	Gusler et al.	705/14
7,464,802 B2	12/2008	Gerrity et al.	194/347	2005/0256792 A1	11/2005	Shimizu et al.	705/35
7,500,568 B2	3/2009	Cousin	209/534	2006/0037835 A1	2/2006	Doran et al.	194/302
7,520,374 B2	4/2009	Martin et al.	194/317	2006/0054455 A1	3/2006	Kuykendall et al.	194/217
7,551,764 B2	6/2009	Chiles et al.	382/135	2006/0054457 A1	3/2006	Long et al.	194/347
7,552,810 B2	6/2009	Mecklenburg	194/317	2006/0060363 A2	3/2006	Carter	172/111
7,580,859 B2	8/2009	Economy	705/16	2006/0064379 A1	3/2006	Doran et al.	705/42
7,654,450 B2	2/2010	Mateen et al.	235/379	2006/0065717 A1	3/2006	Hurwitz et al.	235/381
7,658,270 B2	2/2010	Bochonok et al.	194/350	2006/0069654 A1	3/2006	Beach et al.	705/65
7,735,125 B1	6/2010	Alvarez et al.	726/9	2006/0148394 A1	7/2006	Blake et al.	453/12
7,743,902 B2	6/2010	Wendell et al.	194/302	2006/0149415 A1	7/2006	Richards	700/236
7,778,456 B2	8/2010	Jones et al.	382/135	2006/0151285 A1	7/2006	String	194/350
7,819,308 B2	10/2010	Osterberg et al.	235/379	2006/0154589 A1	7/2006	String	453/11
7,874,478 B2	1/2011	Molbak	235/379	2006/0175176 A1	8/2006	Blake	194/216
7,886,890 B2	2/2011	Blake et al.	194/347	2006/0182330 A1	8/2006	Chiles	382/135
7,931,304 B2	4/2011	Brown et al.	283/57	2006/0196754 A1	9/2006	Bochonok et al.	194/347
7,946,406 B2	5/2011	Blake et al.	194/200	2006/0205481 A1	9/2006	Dominelli	463/25
7,963,382 B2	6/2011	Wendell et al.	194/302	2006/0207856 A1	9/2006	Dean et al.	194/302
7,980,378 B2	7/2011	Jones et al.	194/217	2006/0219519 A1	10/2006	Molbak et al.	194/346
8,023,715 B2	9/2011	Jones et al.	382/135	2007/0051582 A1	3/2007	Bochonok et al.	194/202
8,042,732 B2	10/2011	Blake et al.	235/375	2007/0071302 A1	3/2007	Jones et al.	382/135
8,229,821 B2	7/2012	Mennie et al.	232/16	2007/0108015 A1	5/2007	Bochonok et al.	194/350
8,393,455 B2	3/2013	Blake et al.	194/350	2007/0119681 A1*	5/2007	Blake et al.	194/215
8,443,958 B2	5/2013	Jones et al.	194/215	2007/0181676 A1	8/2007	Mateen et al.	235/381
RE44,252 E	6/2013	Jones et al.	194/217	2007/0187494 A1	8/2007	Hanna	235/383
8,523,641 B2	9/2013	Kuykendall et al.	194/217	2007/0221470 A1	9/2007	Mennie et al.	194/216
2001/0034203 A1	10/2001	Geib et al.	453/3	2007/0269097 A1	11/2007	Chiles et al.	382/135
2001/0048025 A1	12/2001	Shinn	235/382	2008/0033829 A1	2/2008	Mennie et al.	705/16
2002/0065033 A1	5/2002	Geib et al.	453/3	2008/0044077 A1	2/2008	Mennie et al.	382/135
2002/0069104 A1	6/2002	Beach et al.	705/14	2008/0220707 A1	9/2008	Jones et al.	453/2
2002/0074209 A1	6/2002	Karlsson	194/330	2009/0018959 A1	1/2009	Doran et al.	705/44
2002/0095587 A1	7/2002	Doyle et al.	713/186	2009/0236200 A1	9/2009	Hallowell et al.	194/215
2002/0107738 A1	8/2002	Beach et al.	705/14	2009/0236201 A1	9/2009	Blake et al.	194/215
2002/0126885 A1	9/2002	Mennie et al.	382/135	2009/0239459 A1	9/2009	Watts et al.	453/18
2002/0130011 A1	9/2002	Casanova et al.	194/344	2009/0242626 A1	10/2009	Jones et al.	235/379
2002/0147588 A1	10/2002	Davis et al.	704/246	2009/0320106 A1	12/2009	Jones et al.	726/5
2002/0151267 A1	10/2002	Kuhlin et al.	453/3	2010/0038419 A1	2/2010	Blake et al.	235/379
2002/0174348 A1	11/2002	Ting	713/186	2010/0198726 A1	8/2010	Doran et al.	705/41
				2010/0261421 A1	10/2010	Wendell et al.	453/4
				2010/0276485 A1	11/2010	Jones et al.	235/379
				2010/0327005 A1	12/2010	Martin et al.	221/98
				2011/0098845 A1	4/2011	Mennie et al.	700/223

(56)

## References Cited

## U.S. PATENT DOCUMENTS

2011/0099105	A1	4/2011	Mennie et al.	705/41
2011/0270695	A1	11/2011	Jones et al.	705/43
2012/0067950	A1	3/2012	Blake	235/381
2012/0156976	A1	6/2012	Blake et al.	453/4
2013/0178139	A1	7/2013	Hallowell et al.	453/15
2013/0199890	A1	8/2013	Blake	194/216
2013/0205723	A1	8/2013	Blake et al.	53/473

## FOREIGN PATENT DOCUMENTS

CA	2143943	C	3/2003	.....	G07D 3/16
DE	06 60 354		5/1938	.....	G07F 17/26
DE	30 21 327	A1	12/1981	.....	G07D 3/06
EP	0 351 217	A2	1/1990	.....	G07F 9/04
EP	0 667 973	B1	1/1997	.....	G07D 3/14
EP	0 926 634	A2	6/1999	.....	G07D 3/14
EP	1 104 920	A1	6/2001	.....	G07D 5/08
EP	1 209 639	A2	5/2002	.....	G07F 19/00
EP	1 528 513	A1	5/2005	.....	G07F 7/08
FR	2042254		2/1971	.....	G07B 11/00
GB	2035642	A	6/1980	.....	G07F 7/10
GB	2175427	A	11/1986	.....	G07F 17/42
GB	2198274	A	6/1988	.....	G07D 3/00
GB	2458387	A	9/2009	.....	G07D 11/00
GB	2468783	A	9/2010	.....	C07D 9/00
JP	49-058899		6/1974	.....	
JP	52-014495		2/1977	.....	G07F 5/10
JP	52-071300	A	6/1977	.....	G07F 5/22
JP	56-040992	A	4/1981	.....	G07F 5/18
JP	57-117080	A	7/1982	.....	G07D 3/16
JP	59-079392	A	5/1984	.....	G07D 3/16
JP	60-016271	U	2/1985	.....	G07F 7/02
JP	62-134168	U	8/1987	.....	G07B 1/00
JP	62-182995	A	8/1987	.....	G07F 7/08
JP	62-221773	A	9/1987	.....	G06F 15/30
JP	62-166562	U	10/1987	.....	G07B 1/00
JP	64-035683	A	2/1989	.....	G07D 9/00
JP	64-042789	A	2/1989	.....	G07F 9/00
JP	64-067698	A	3/1989	.....	G07F 7/08
JP	01-118995	A	5/1989	.....	G07G 1/00
JP	01-307891	A	12/1989	.....	G07D 9/00
JP	02-050793	A	2/1990	.....	G07D 9/00
JP	02-252096	A	10/1990	.....	G07D 9/00
JP	03-012776	A	1/1991	.....	G06F 15/30
JP	03-063795	A	3/1991	.....	G07D 3/00
JP	03-092994	A	4/1991	.....	G07D 9/00
JP	03-156673	A	7/1991	.....	G06F 15/30
JP	04-085695	A	3/1992	.....	G07F 11/72
JP	04-175993	A	6/1992	.....	G07F 5/22
JP	05-046839	A	2/1993	.....	G07D 5/02
JP	05-217048	A	8/1993	.....	G07D 3/16
JP	05-274527	A	10/1993	.....	G07D 9/00
JP	06-035946	A	2/1994	.....	G06F 15/30
JP	06-103285	A	4/1994	.....	G06F 15/21
JP	09-251566	A	9/1997	.....	G07F 7/08
JP	2002-117439	A	4/2002	.....	G07D 9/00
JP	2003-242287	A	8/2003	.....	G06F 17/60
JP	2004-213188	A	7/2004	.....	G06F 17/60
SE	44 244		9/1988	.....	
WO	WO 85/00909	A1	2/1985	.....	G07D 5/02
WO	WO 91/06927	A1	5/1991	.....	G07D 3/16
WO	WO 91/08952	A1	6/1991	.....	B65B 11/04
WO	WO 91/12594	A1	8/1991	.....	G07D 3/16
WO	WO 91/18371	A1	11/1991	.....	G07D 3/16
WO	WO 92/08212	A1	5/1992	.....	G07D 3/16
WO	WO 92/20043	A1	11/1992	.....	G07D 3/00
WO	WO 92/20044	A1	11/1992	.....	G07D 3/16
WO	WO 92/22044	A1	12/1992	.....	G07D 3/00
WO	WO 93/00660	A1	1/1993	.....	G07D 3/00
WO	WO 93/09621	A1	5/1993	.....	H04L 9/32
WO	WO 94/06101	A1	3/1994	.....	G07D 3/16
WO	WO 94/08319	A1	4/1994	.....	G07D 3/16
WO	WO 94/23397	A1	10/1994	.....	G07D 3/00
WO	WO 95/02226	A1	1/1995	.....	G07D 3/00

WO	WO 95/04978	A1	2/1995	.....	G07D 3/06
WO	WO 95/06920	A1	3/1995	.....	G07D 3/16
WO	WO 95/09406	A1	4/1995	.....	G07D 3/16
WO	WO 95/13596	A1	5/1995	.....	G07D 3/14
WO	WO 95/19017	A1	7/1995	.....	G07D 1/00
WO	WO 95/23387	A1	8/1995	.....	G07D 3/16
WO	WO 95/30215	A1	11/1995	.....	G07F 17/42
WO	WO 96/07163	A1	3/1996	.....	G07D 3/06
WO	WO 96/07990	A1	3/1996	.....	G07D 3/16
WO	WO 96/12253	A1	4/1996	.....	G07D 3/00
WO	WO 96/27525	A1	9/1996	.....	B65B 11/02
WO	WO 96/27859	A1	9/1996	.....	G07D 5/08
WO	WO 97/22919	A1	6/1997	.....	G06F 7/08
WO	WO 97/25692	A1	7/1997	.....	G07D 3/06
WO	WO 98/24041	A1	6/1998	.....	G06F 17/60
WO	WO 98/24067	A1	6/1998	.....	G07D 3/14
WO	WO 98/48383	A2	10/1998	.....	G07D 1/00
WO	WO 98/48384	A2	10/1998	.....	G07D 1/00
WO	WO 98/48385	A2	10/1998	.....	G07D 1/00
WO	WO 98/51082	A1	11/1998	.....	H04N 7/18
WO	WO 98/59323	A1	12/1998	.....	G07D 3/00
WO	WO 99/00776	A1	1/1999	.....	G07F 9/06
WO	WO 99/06937	A1	2/1999	.....	G06F 19/00
WO	WO 99/16027	A2	4/1999	.....	G07F 7/02
WO	WO 99/33030	A1	7/1999	.....	G07D 3/00
WO	WO 99/41695	A1	8/1999	.....	G06K 5/00
WO	WO 99/48057	A1	9/1999	.....	G07D 3/06
WO	WO 99/48058	A1	9/1999	.....	G07D 3/06
WO	WO 00/48911	A1	8/2000	.....	B65B 67/12
WO	WO 00/65546	A1	11/2000	.....	G07F 1/04
WO	WO 01/63565	A2	8/2001	.....	G07D 9/00
WO	WO 02/071343	A1	9/2002	.....	G07D 3/00
WO	WO 03/052700	A2	6/2003	.....	
WO	WO 03/079300	A1	9/2003	.....	G07D 7/00
WO	WO 03/085610	A1	10/2003	.....	G07D 9/06
WO	WO 03/107280	A2	12/2003	.....	
WO	WO 2004/044853	A1	5/2004	.....	G07D 3/12
WO	WO 2004/109464	A2	12/2004	.....	
WO	WO 2005/041134	A2	5/2005	.....	
WO	WO 2005/088563	A1	9/2005	.....	G07D 3/00
WO	WO 2006/086531	A1	8/2006	.....	G07D 9/00
WO	WO 2007/035420	A2	3/2007	.....	G06F 7/00
WO	WO 2007/120825	A2	10/2007	.....	G06K 9/00

## OTHER PUBLICATIONS

AUI: Coinverter—"No More Lines . . . Self-Serve Cash-Out," by Cassius Elston, 1995 World Games Congress/Exposition Converter, 1 page (dated prior to 1995).

Brandt: 95 Series Coin Sorter Counter, 2 pages (1982).

Brandt: Model 817 Automated Coin and Currency Ordering System, 2 pages (1983).

Brandt: Model 920/925 Counter, 2 pages (date unknown, prior to Jul. 2011, possibly prior to Mar. 17, 1997).

Brandt: System 930 Electric Counter/Sorter, "Solving Problems, Pleasing Customer, Building Deposits," 1 page (date unknown, prior to Mar. 2, 2011, possibly prior to Mar. 17, 1997).

Brandt: Model 940-6 High Speed Sorter/Counter, 2 pages (date unknown, prior to Oct. 31, 1989).

Brandt: System 945 High-Speed Sorter, 2 pages (date unknown, prior to Mar. 2, 2011, possibly prior to Mar. 17, 1997).

Brandt: Model 952 Coin Sorter/Counter, 2 pages (date unknown, prior to Oct. 31, 1989).

Brandt: Model 954 Coin Sorter/Counter, 2 pages (date unknown, prior to Oct. 31, 1989).

Brandt: Model 957 Coin Sorter/Counter, 2 pages (date unknown, prior to Oct. 31, 1989).

Brandt: Model 958 Coin Sorter/Counter, 5 pages (© 1982).

Brandt: Model 960 High-Speed Coin Sorter & Counter, 2 pages (1984).

Brandt: Model 966 Microsort™ Coin Sorter and Counter, 4 pages, (1979).

Brandt: Model 970 Coin Sorter and Counter, 2 pages (1983).

Brandt: Model 1205 Coin Sorter Counter, 2 pages (1986).

Brandt: Model 1400 Coin Sorter Counter, 2 pages (date unknown, prior to Mar. 2, 2011, possibly prior to Mar. 17, 1997).

(56)

**References Cited****OTHER PUBLICATIONS**

Brandt: Model 8904 Upfeed—"High Speed 4-Denomination Currency Dispenser," 2 pages (1989).

Brandt: Mach 7 High-Speed Coin Sorter/Counter, 2 pages (1992).

Case ICC Limited: CDS Automated Receipt Giving Cash Deposit System, 3 pages (date unknown, prior to Nov. 15, 2000).

Cash, Martin: Newspaper Article "Bank Blends New Technology With Service," Winnipeg Free Press, 1 page (Sep. 4, 1992).

Childers Corporation: Computerized Sorter/Counter, "To coin an old adage, time is money . . .," 3 pages (1981).

CTcoin: CDS602 Cash Deposit System, 1 page (date unknown, prior to Jan. 15, 2001).

Cummins: Cash Information and Settlement Systems (Form 023-1408), 4 pages (date Dec. 1991).

Cummins: The Universal Solution to All Coin and Currency Processing Needs (Form 13C1218 3-83), 1 page (Mar. 1983).

Cummins: JetSort® High Speed Sorter/Counter Kits I & J—Operating Instructions (Form 022-7123-00) 12 pages (1994).

Cummins: JetSort® Coin Sorter Counter/CA-130XL Coin Wrapper, Cummins Automated Money Systems (AMS) Case Study—Fifth-Third, "6,000 Coin Per Minute Counter/Sorter Keeps pace With Fifth-Third Bank's Money Processing Needs," (Form 13C1180), 2 pages (Nov. 1981).

Cummins: JetSort®, "Venders Love JetSort," (13C1255), 1 page (Mar. 1987).

Cummins: JetSort® "High Speed Coin Sorter & Counter for Payphone Applications," "CTOCS Ready" (Form 023-1365), 2 pages (Mar. 1989).

Cummins: JetSort® mailer, "One moving part simplicity," "Vendors—Are validators changing your coin and currency needs?" (Form 023-1297), 3 pages (Apr. 1987).

Cummins: JetSort® Series V High Speed Coin Sorter/Counter, (Form 023-1383), 2 pages (Sep. 1990).

Cummins: JetSort® "Time for a Change, Be a smashing success!," (Form 023-1328), 1 page (Jun. 1988).

Cummins: JetSort® "Time for a Change—JetSort® vs. Brandt X," (Form 023-1330), 1 page (Jun. 1988).

Cummins: JetSort® "Time for a Change—No Coins Sorted After 3:00 or on Saturday," (Form 023-1327), 1 page (Aug. 1988).

Cummins: JetSort®, "What do all these Banks have in Common . . . ?," JetSort, CA-130XL coin wrapper, CA-118 coin wrapper, CA-4000 JetCount, (13C1203), 3 pages (Aug. 1982).

Cummins: JetSort® 700-01/CA-118 Coin Wrapper, Cummins Automated Money Systems (AMS) Case Study—University State Bank, "Cummins Money Processing System Boosts Teller Service at University State Bank," (Form 13C1192), 2 pages (Mar. 1982).

Cummins: JetSort® 700-01, Cummins Automated Money Systems (AMS) Case Study—First State Bank of Oregon, "JetSort® Gives Bank Coin Service Edge," (Form 13C1196), 2 pages (Apr. 1982).

Cummins: JetSort® 700-01 Coin Sorter/Counter, Operating Instructions, 14 pages (1982).

Cummins: JetSort® 701, Cummins Automated Money Systems (AMS) Case Study—Convenco Vending, "High Speed Coin Sorter increases coin processing power at Convenco Vending," (Form 13C1226), 2 pages (Jul. 1983).

Cummins: JetSort Models 701 and 750, "State-of-the-art coin processing comes of age," 2 pages (Feb. 1984).

Cummins: JetSort® Model CA-750 Coin Processor (Item No. 50-152), 1 page (Jul. 1984).

Cummins: JetSort® Model CA-750 Coin Sorter/Counter and CA-4050 JetCount currency counter, "Money Processing Made Easy," (Form 13C1221) 2 pages (Jun. 1983).

Cummins: JetSort® Model 1701 with JetStops, Operating Instructions Manual (Form 022-1329-00), 16 pages (1984).

Cummins: JetSort® Model 1760 brochure, (Form 023-1262-00), 2 pages (Jul. 1985).

Cummins: JetSort® Models 1770 and 3000, Communication Package specification and operating instructions, 10 pages (uncertain, possibly Nov. 1985).

Cummins: JetSort® Model 1770, "JetSort® Speed and Accuracy. Now with Communications!," (Form 023-1272) 1 page (Oct. 1986).

Cummins: JetSort® 2000 Series High Speed Coin Sorter/Counter (Form 023-1488), 2 pages (Oct. 2000).

Cummins: JetSort® 3000 Series High Speed Coin Sorter (Form 023-1468 Rev 1), 2 pages (Feb. 1995).

Cummins: JetSort® 3000 Series Options, "Talking JetSort 3000," (Form 023-1338-00), 1 page (between Jan. 1989-Feb. 1989).

Cummins: JetSort® 3000, "3,000 Coins per Minute!," (Form 023-1312), 1 page (date unknown, est. 1987).

Cummins: JetSort® 3200, Enhanced electronics for the JetSort® 3200 (Form 023-1350), 1 page (Apr. 1987).

De La Rue: CDS 500 Cash Deponier System, 6 pages (date unknown, p. 5 has date May 1994, p. 6 has date Dec. 1992) (German).

De La Rue: CDS 5700 and CDS 5800 Cash Deponier System (German) and translation, 7 pages (date unknown, prior to Aug. 13, 1996).

Diebold: Merchant MicroBranch, "Merchant MicroBranch Combines ATM After-Hour Depository Rolled-Coin Dispenser," Bank Technology News, 1 page (Nov. 1997).

Fa. GBS-Geldbearbeitungssysteme: GBS9401SB Technical Specification, 24 pages (date unknown, prior to Nov. 10, 2010).

Frisco Bay: Commercial Kiosk, "Provide self-service solutions for your business customers," 4 pages (date unknown, prior to Mar. 2, 2011, p. 4 has date 1996).

Glory: AMT Automated Merchant Teller, 4 pages (date unknown, prior to Jan. 15, 2001).

Glory: CRS-8000 Cash Redemption System, 2 pages (1996).

Hamilton: Hamilton's Express Banking Center, in Less Space Than a Branch Manager's Desk, 4 pages (date unknown, prior to Jan. 15, 2001).

Intellectual Australia Pty. Ltd.: Microbank, "From down under: Microbank," "hand-held smart card terminal that combines smart card functions and telephone banking," 2 pages (Feb. 1996).

ISH Electronic: ISH I2005/500 Coin Counter (with translation), 4 pages (date unknown, prior to Aug. 1996).

ISH Electronic: ISH I2005/501 Self-Service Unit (with translation), 4 pages (date unknown, prior to Aug. 1996).

Namsys, Inc.: Namsys Express, Making currency management . . . more profitable, 2 pages (date unknown, prior to Jan. 15, 2001).

NGZ Geldzahlmaschinen-gesellschaft: NGZ 2100 Automated Coin Depository, 4 pages (date unknown, prior to Sep. 1996).

Perconta: Contomat Coin Settlement Machine for Customer Self Service, 2 pages (date unknown, prior to Apr. 2003).

Prema GmbH: Prema 405 (RE) Self Service Coin Deposit Facility, 2 pages (date unknown, prior to Apr. 2003).

Reis Eurosystems: CRS 6501/CRS 6510 Cash Receipt Systems for Self-Service Area, 3 pages (date unknown, prior to Aug. 13, 1996, maybe Feb. 1995).

Reis Eurosystems: CRS 6520/CRS 6525 Standard-Class Coin Deposit Systems, 1 page (date unknown, prior to Apr. 2003).

Reis Eurosystems: CS 3510 Disc-Sorter, 1 page (date unknown, prior to Apr. 2003).

Royal Bank: Hemeon, Jade, "Royal's Burlington drive-in bank provides customers 24-hour tellers," The Toronto Star, 1 page (Aug. 21, 1991).

Royal Bank: Leitch, Carolyn, "High-Tech Bank Counts Coins," The Globe and Mail, 2 pages (Sep. 19, 1991).

Royal Bank: Oxby, Murray, "Royal Bank Opens 'Super Branch,'" The Gazette Montreal, 2 pages (Sep. 14, 1991).

Royal Bank: SuperBranch, "Experience the Ultimate in Convenience Banking," 2 pages (Feb. 1992).

Scan Coin: International Report, 49 pages (Apr. 1987).

Scan Coin: Money Processing Systems, 8 pages (date unknown, prior to Apr. 2003).

Scan Coin: World, 2 pages (Feb. 1988).

Scan Coin: CDS Cash Deposit System, 6 pages (date unknown, prior to Apr. 2003) [SC 0369].

Scan Coin: CDS Coin Deposit System—Technical Referens Manual, 47 pages (1989).

(56)

**References Cited**

OTHER PUBLICATIONS

Scan Coin: CDS 600 User's Manual, 14 pages (date unknown, prior to Apr. 2003).

Scan Coin: CDS 600 & CDS 640 Cash Deposit System—Technical Manual, 45 pages (date unknown, prior to Apr. 2003).

Scan Coin: CDS MK I Coin Deposit System—Technical Manual, 32 pages (1991).



Scan Coin: SC 102 Value Counter Technical Manual, 28 pages (date unknown, prior to Apr. 2003).

Pay by Touch: Secure ID News, "Piggly Wiggly Extends Biometric Payments Throughout the Southeast U.S.," 2 pages, (Dec. 14, 2005).

ESD, Inc: Smartrac Card System, "Coinless laundry makes quarters obsolete; Smartrac Card System really makes a change in laundry industry;" Business Wire, 2 pages (Feb. 23, 1996).

Meece, Mickey: Article "Development Bank of Singapore Gets Cobranding Edge with Smart Cards," American Banker, New York, NY, vol. 159, Iss. 195, p. 37, 2 pages (Oct. 10, 1994).

\* cited by examiner

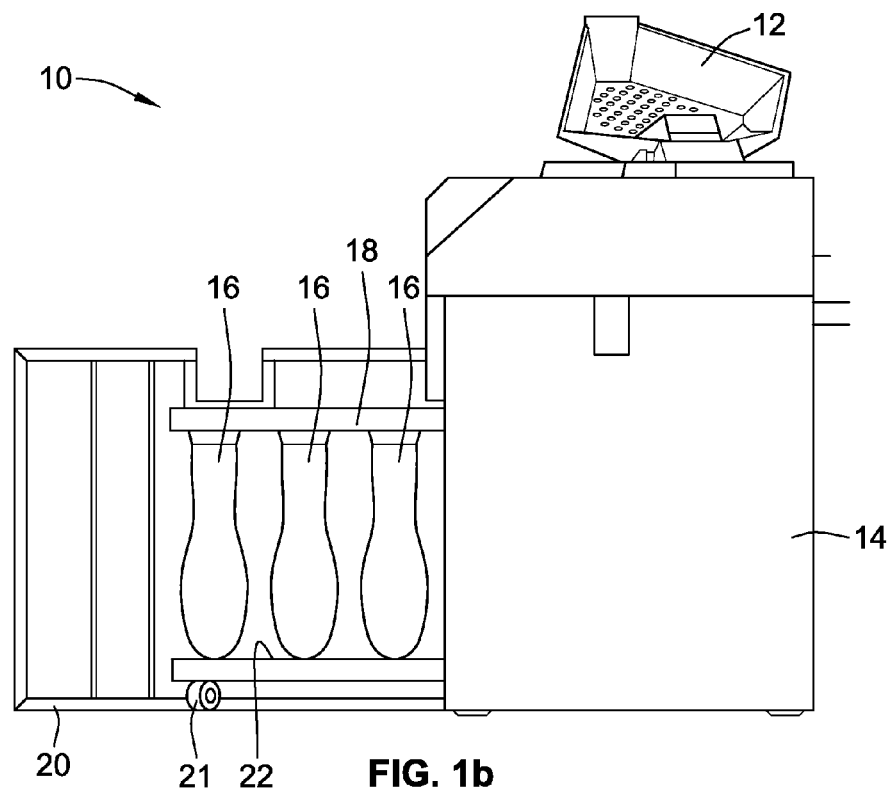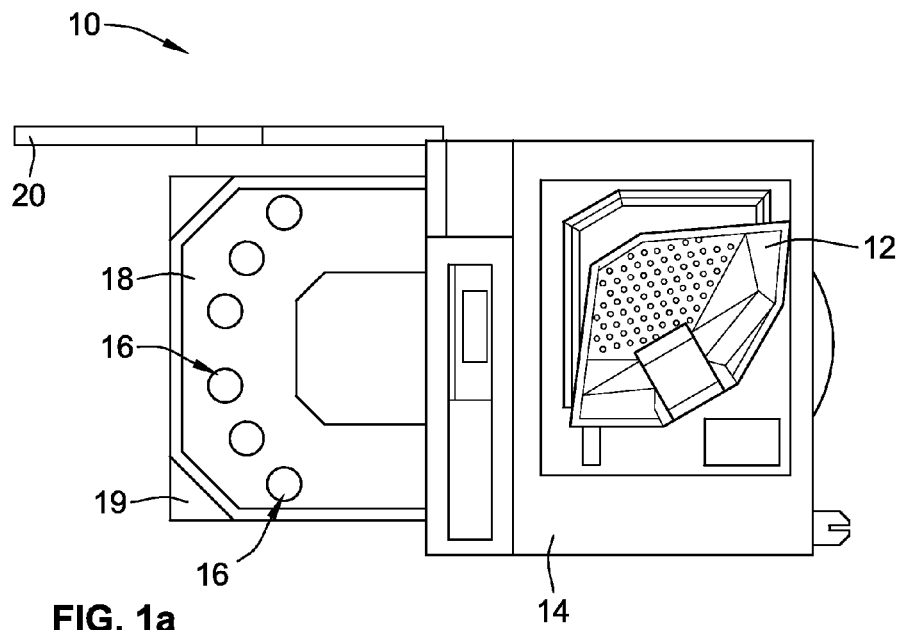



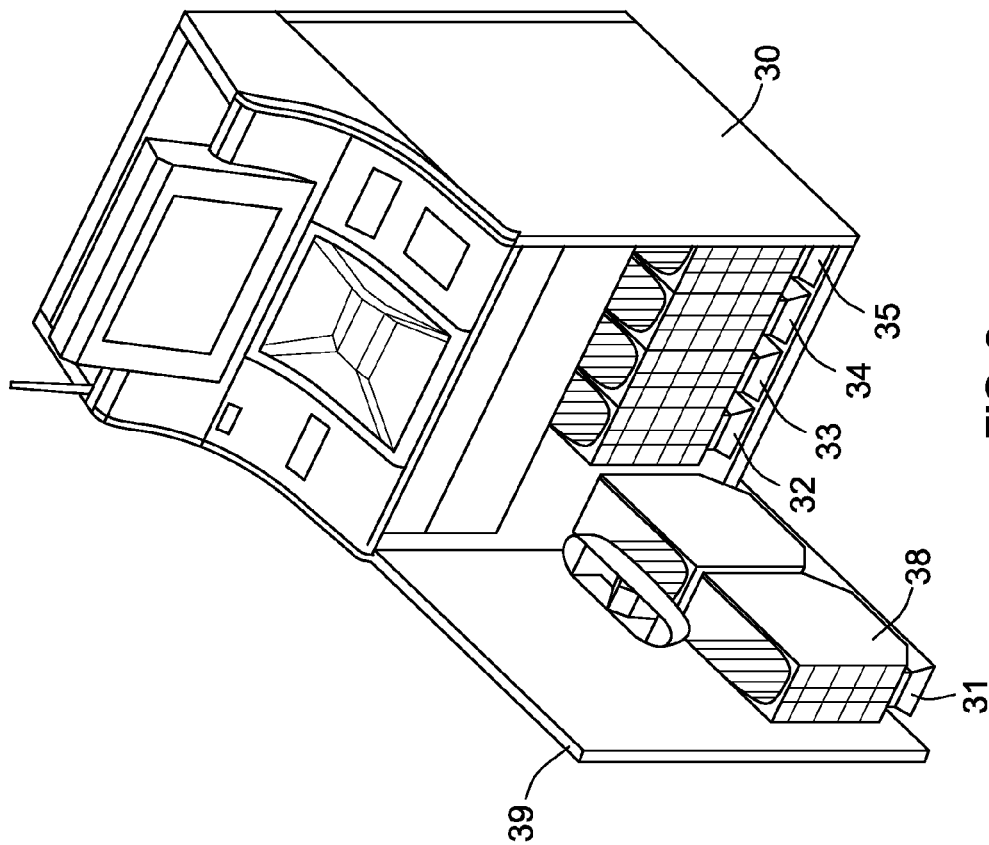


FIG. 2

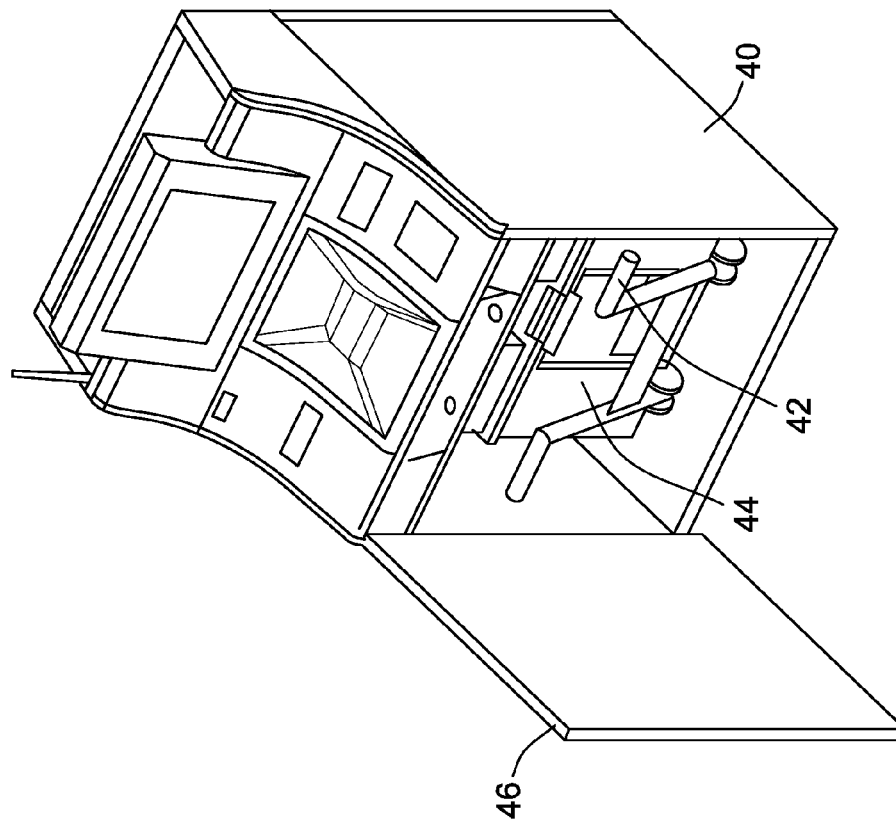
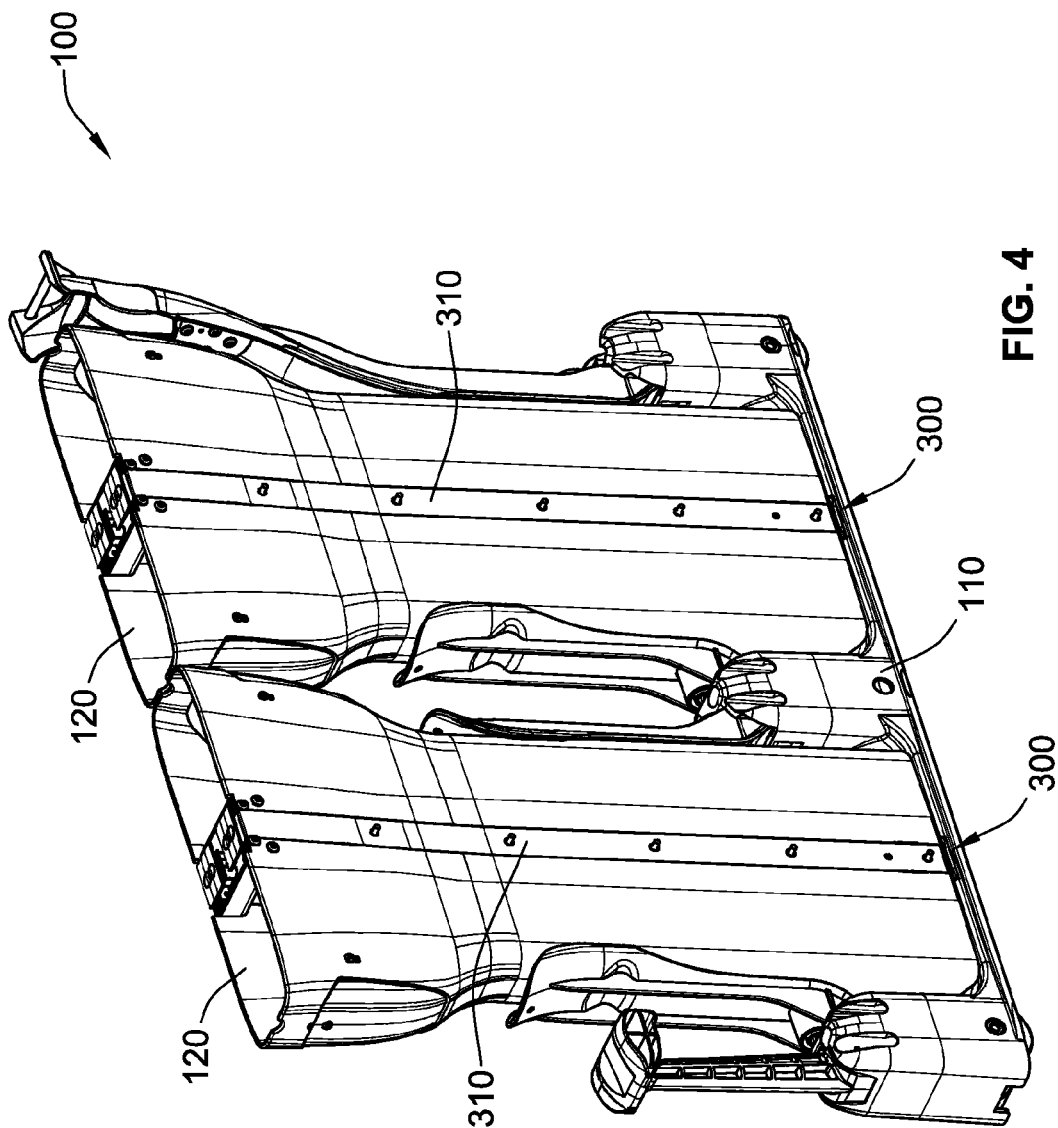


FIG. 3



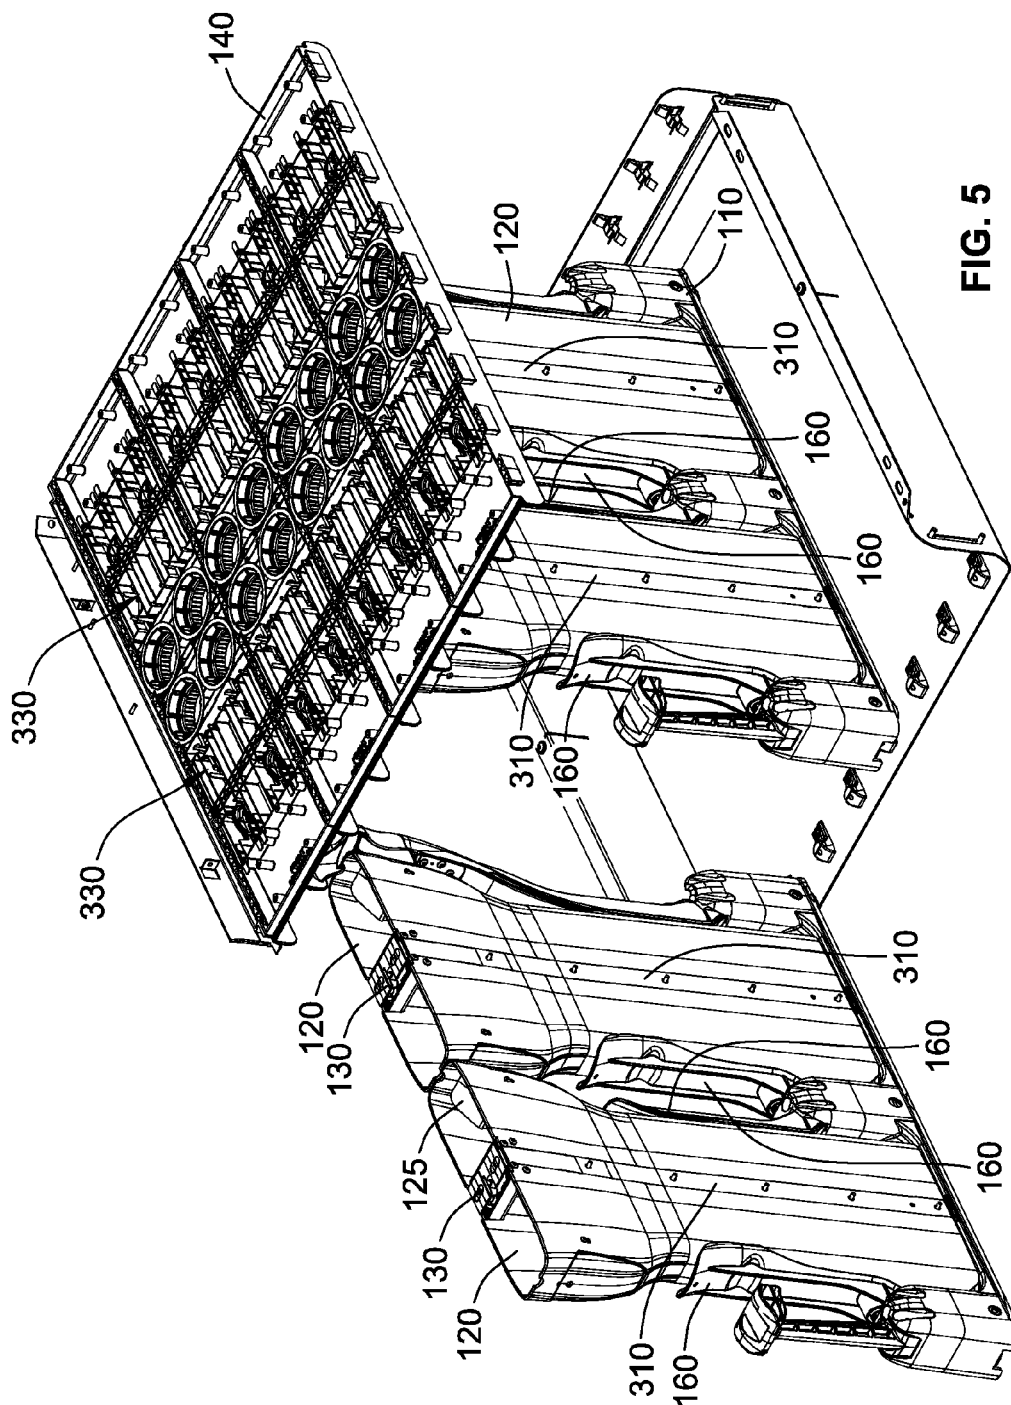
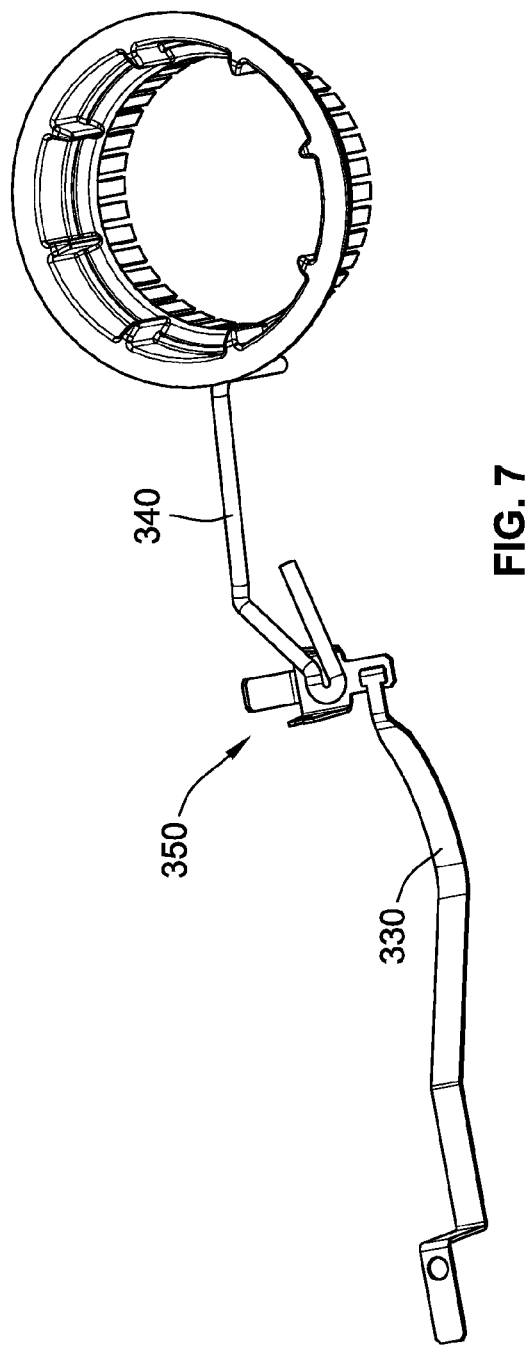
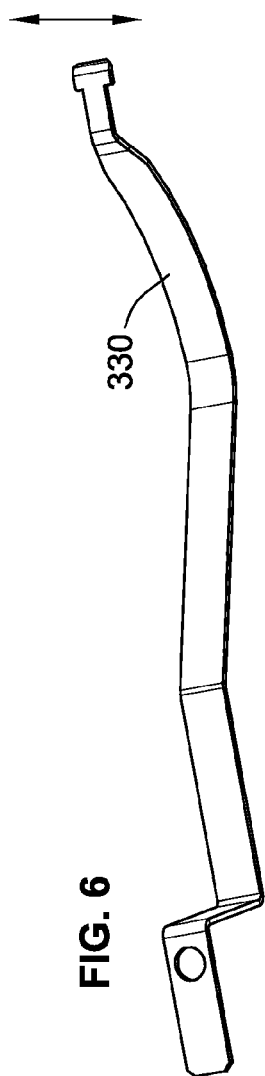
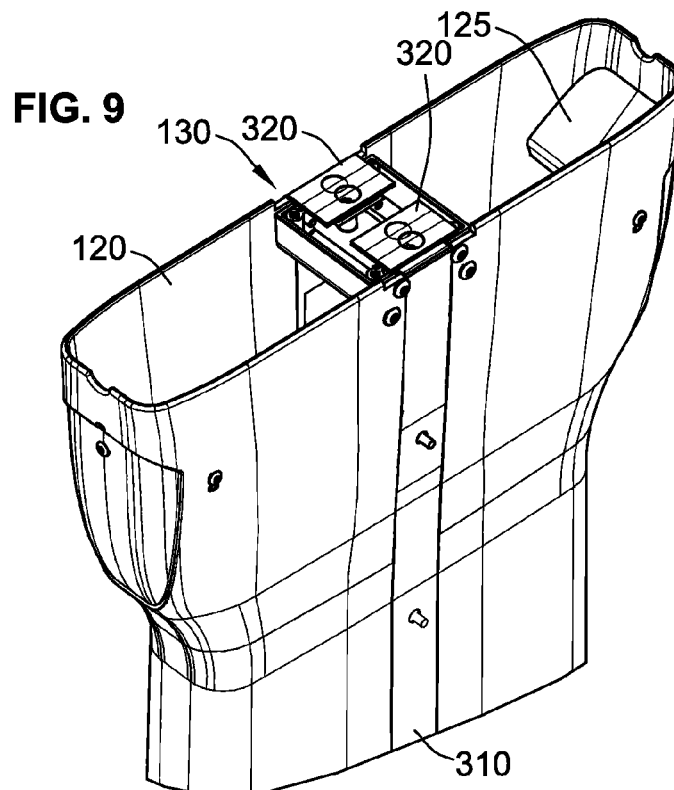
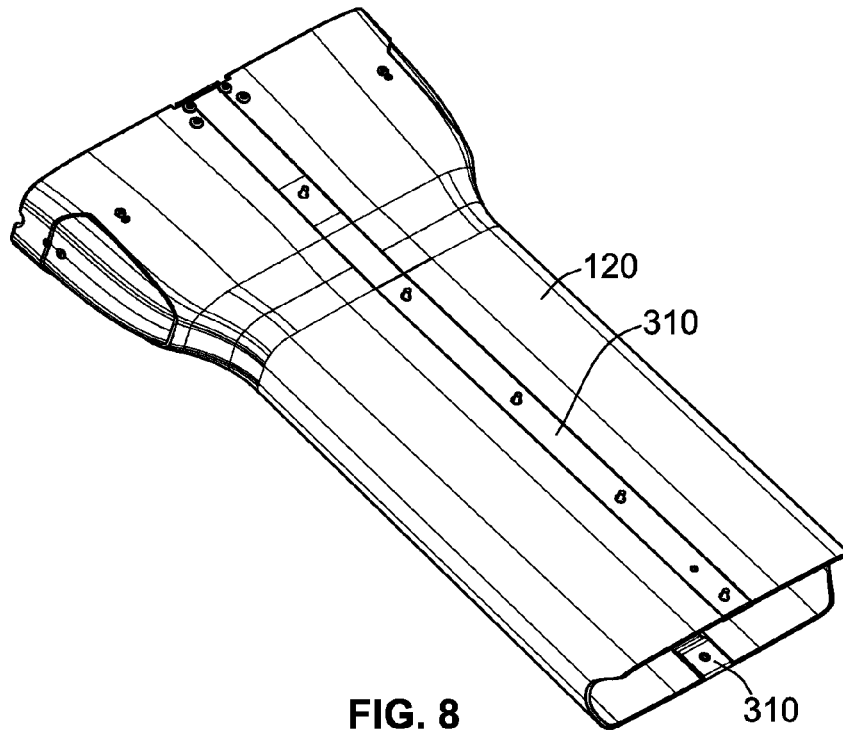
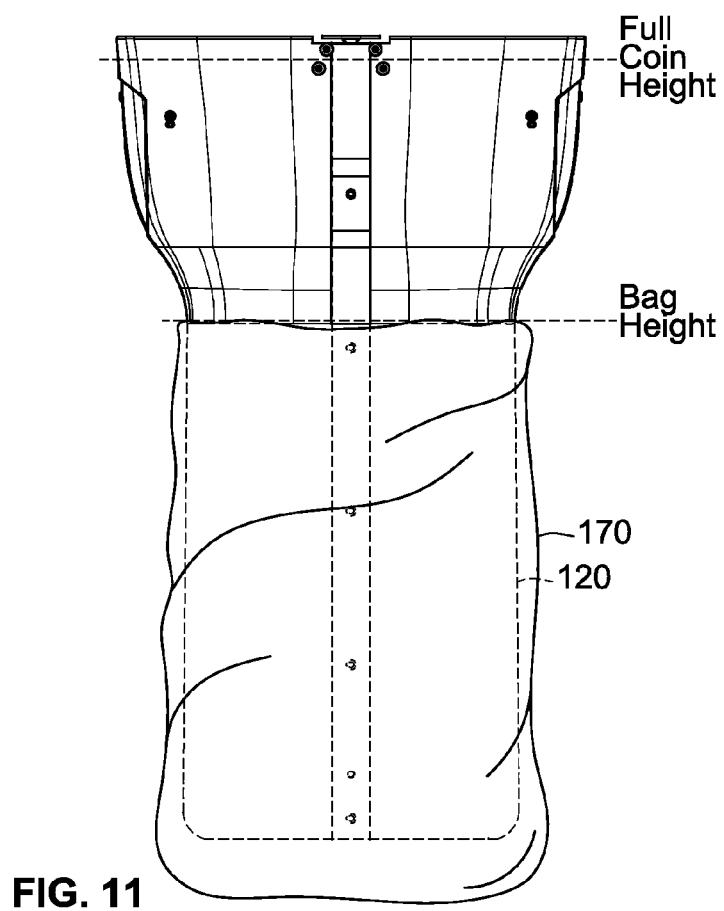
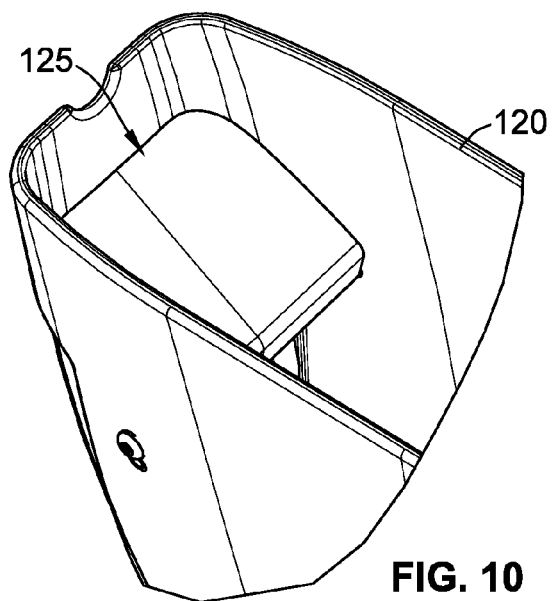
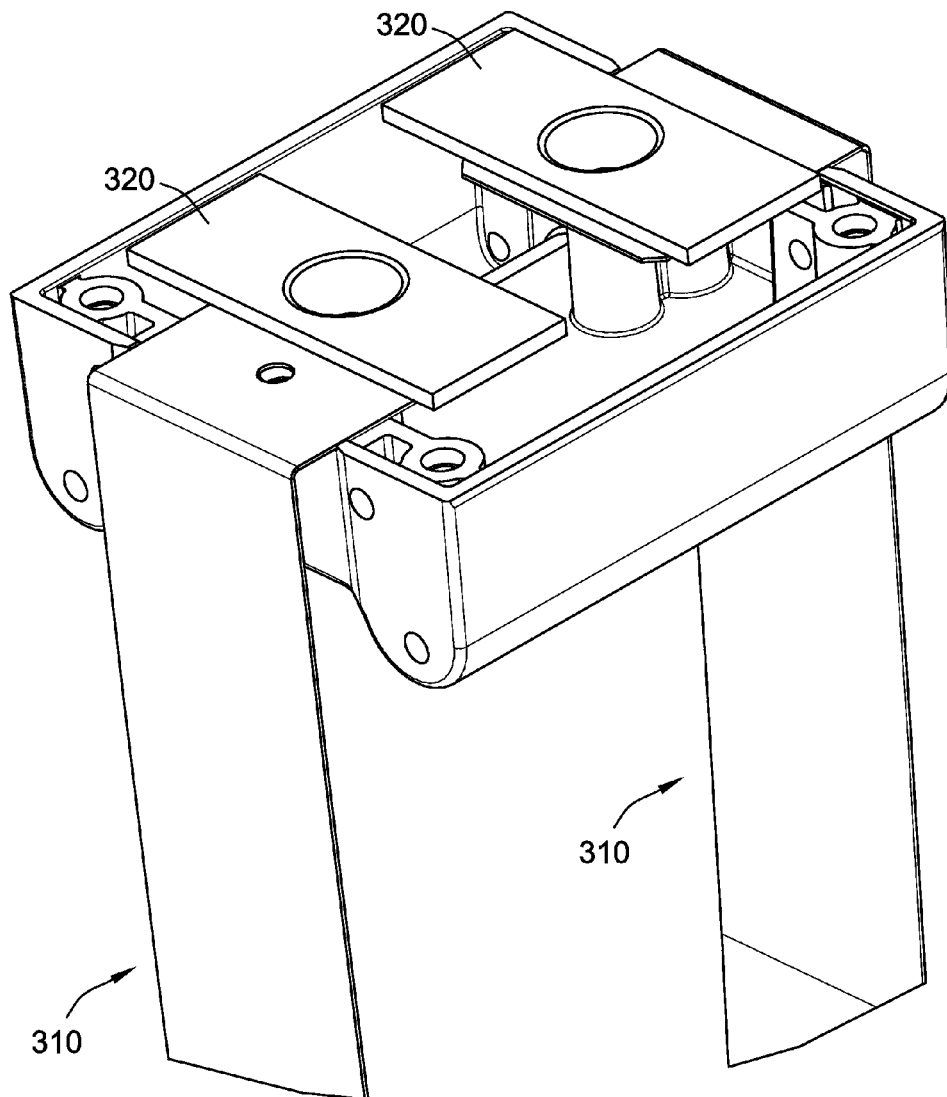


FIG. 5







**FIG. 12**



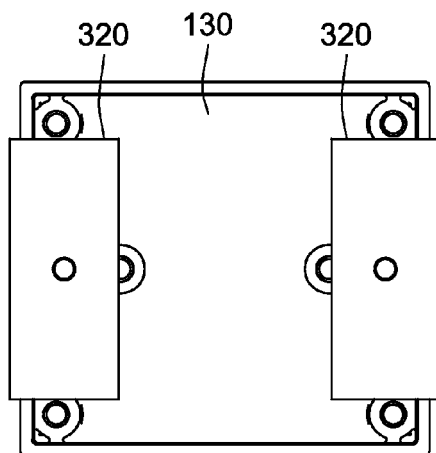


FIG. 13a

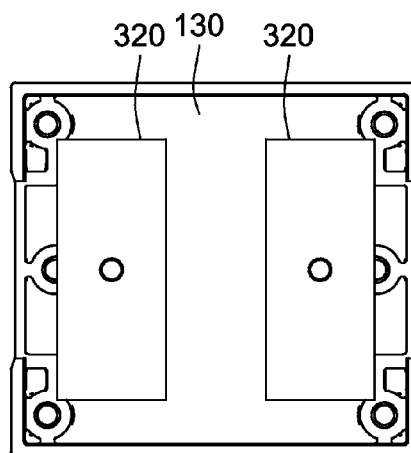


FIG. 13b

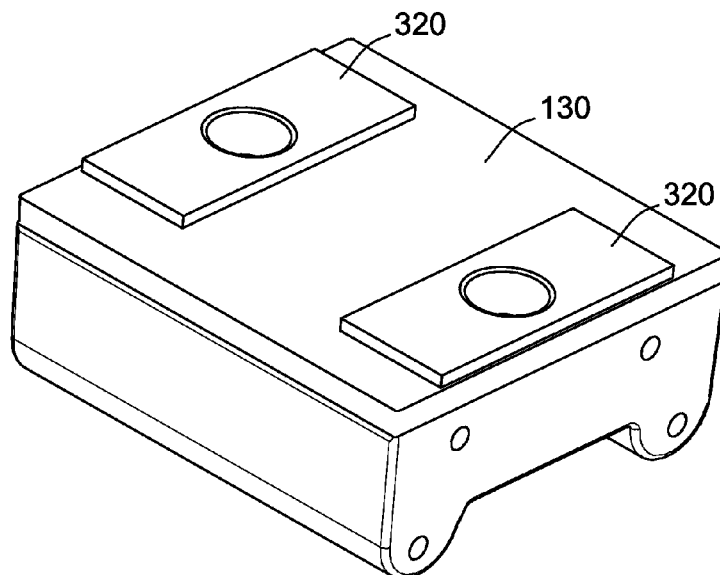


FIG. 13c

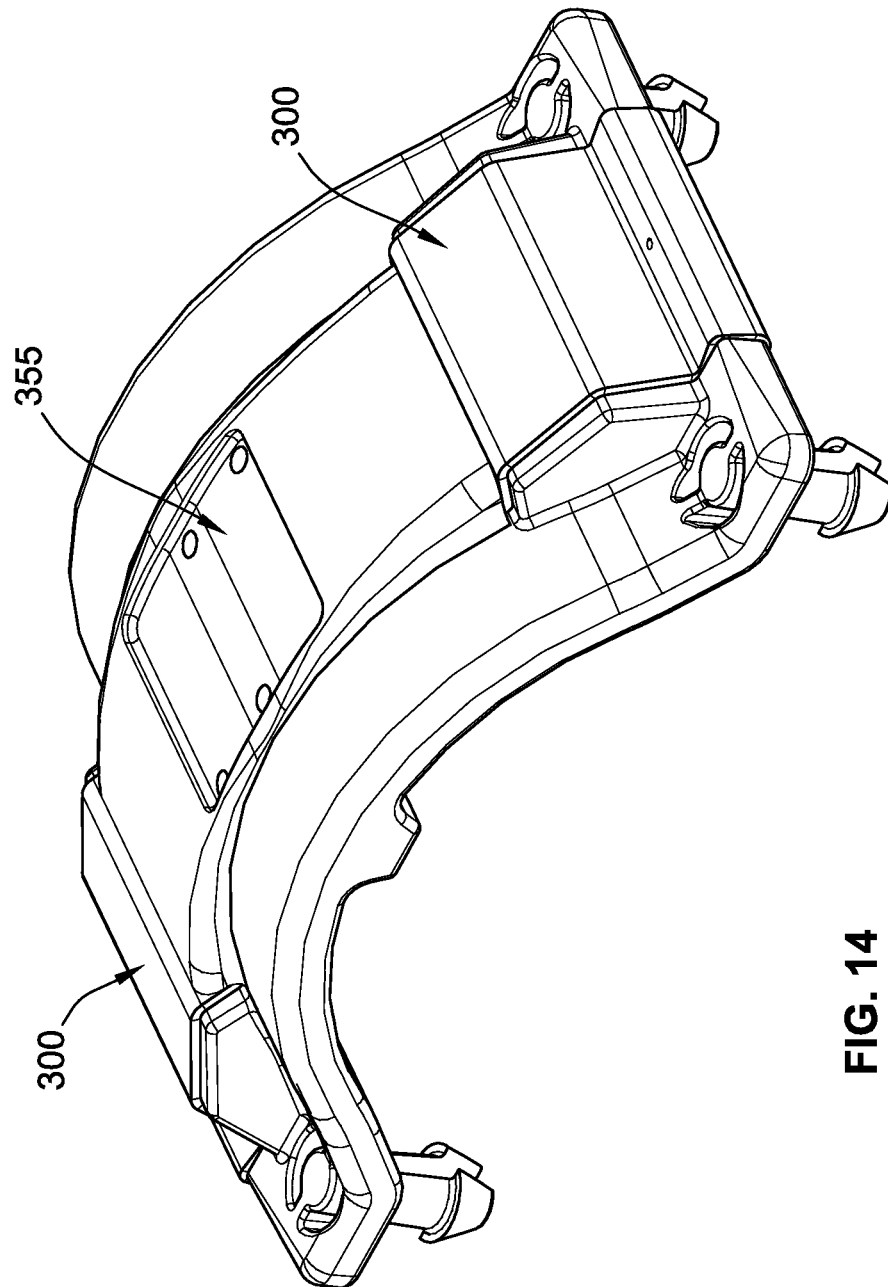


FIG. 14

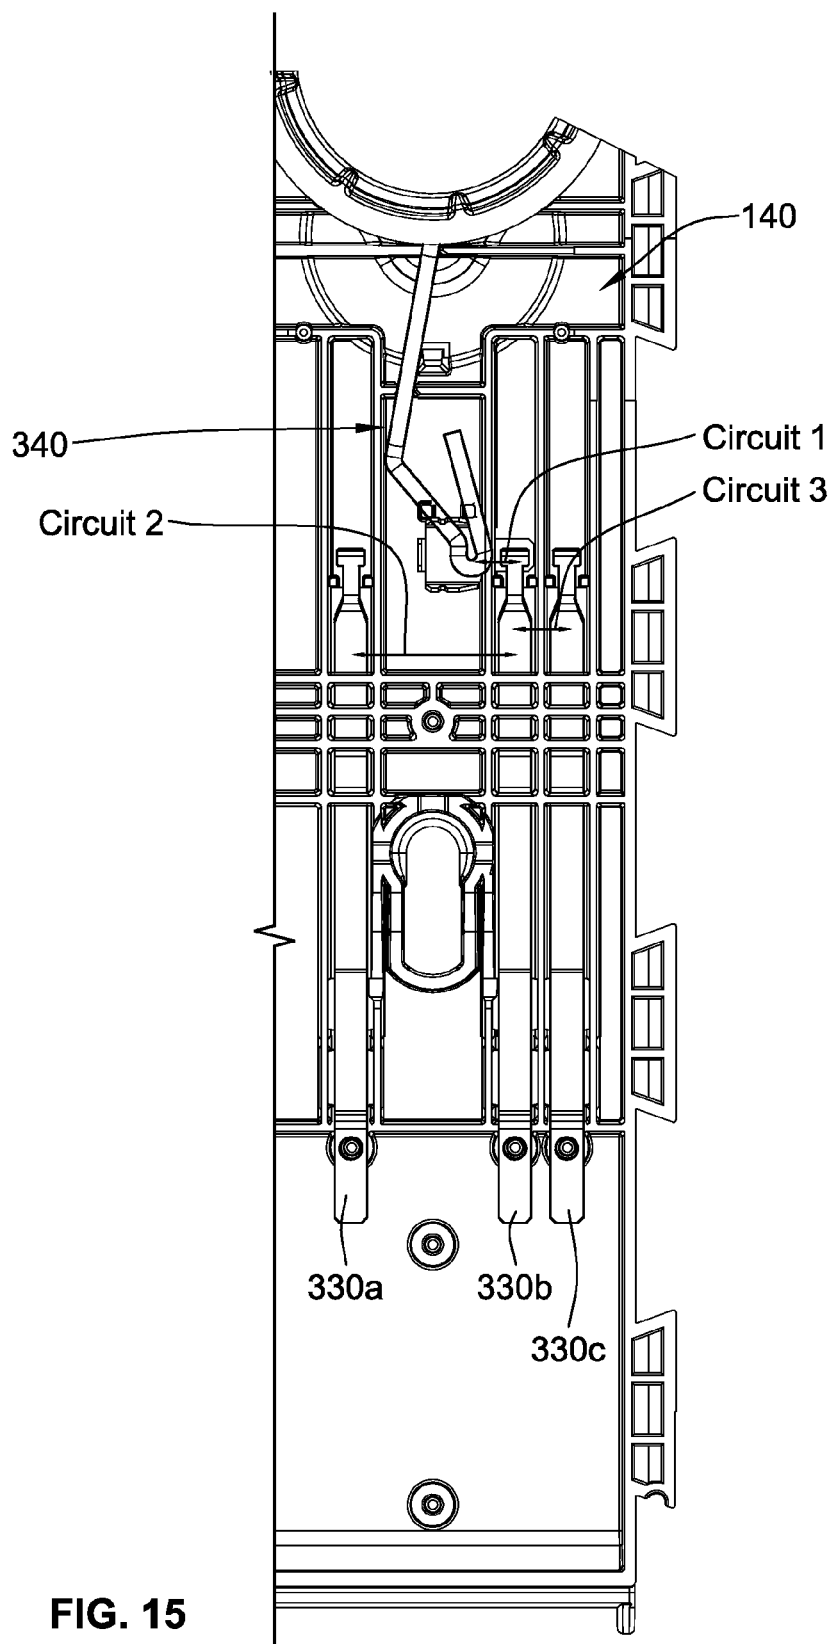


FIG. 15


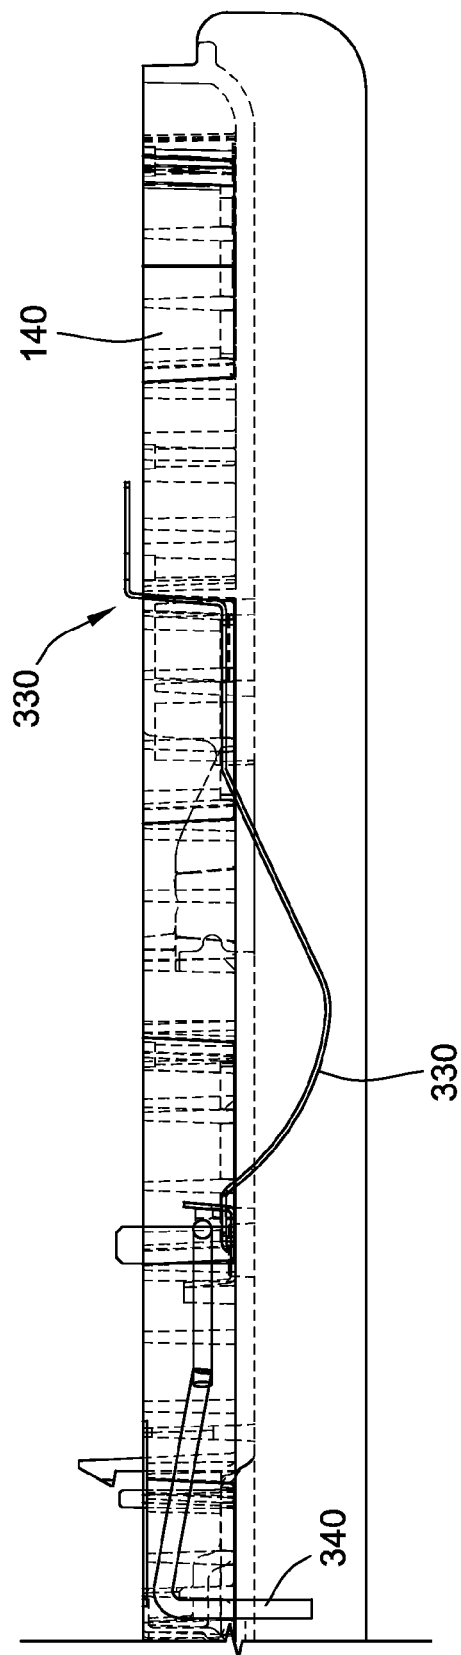


FIG. 16

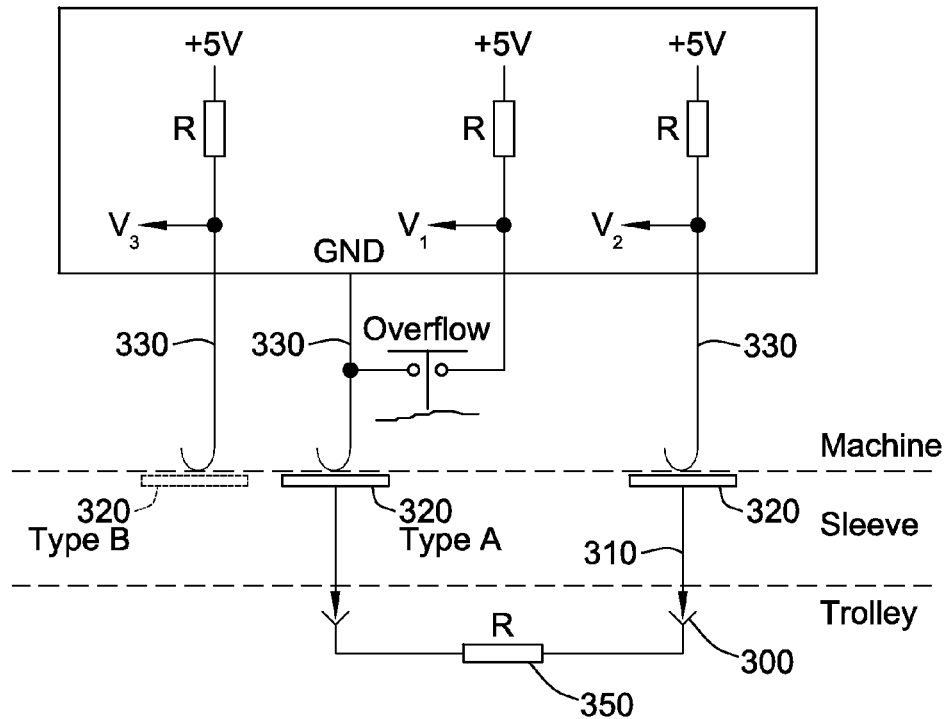

	V <sub>1</sub>	V <sub>2</sub>	SLEEVE	BAG	COINS	OVFL	A/B	V <sub>3</sub>
1	0	5V	OUT	-	-	--	--	5V
2	5V	2.5V	IN	OFF	-	--	A	5V
3	5V	5V	IN	ON	NO	--	A	5V
4	5V	0	IN	ON	YES	NO	A	5V
5	0	0	IN	ON	YES	YES	A	5V
6	0	5V	OUT	-	-	--	--	5V
7	5V	2.5V	IN	OFF	-	--	B	0V
8	5V	5V	IN	ON	NO	--	B	0V
9	5V	0	IN	ON	YES	NO	B	0V
10	0	0	IN	ON	YES	YES	B	0V

**Note:** Above columns 6 & 9 are for Bag Sleeves in their correct position.  
If any sleeve is reversed (B-front, A-back), the voltage will be reversed from 0V to 5V or vice versa.

FIG. 17

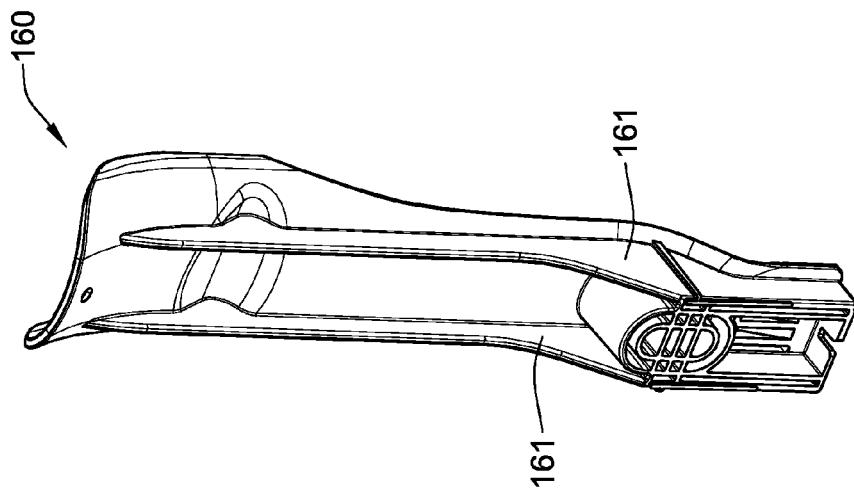


FIG. 18b

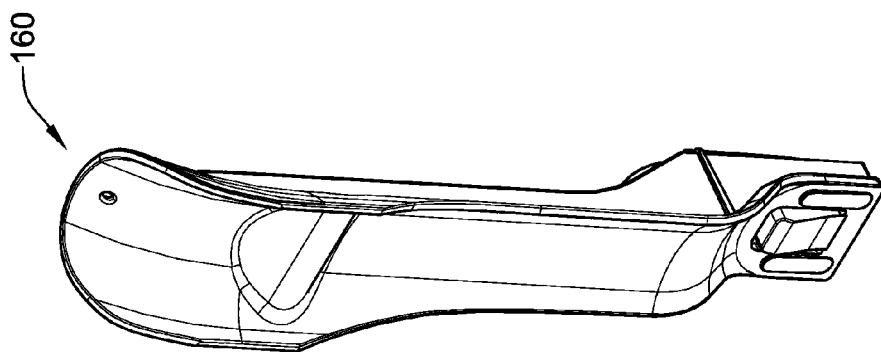


FIG. 18a

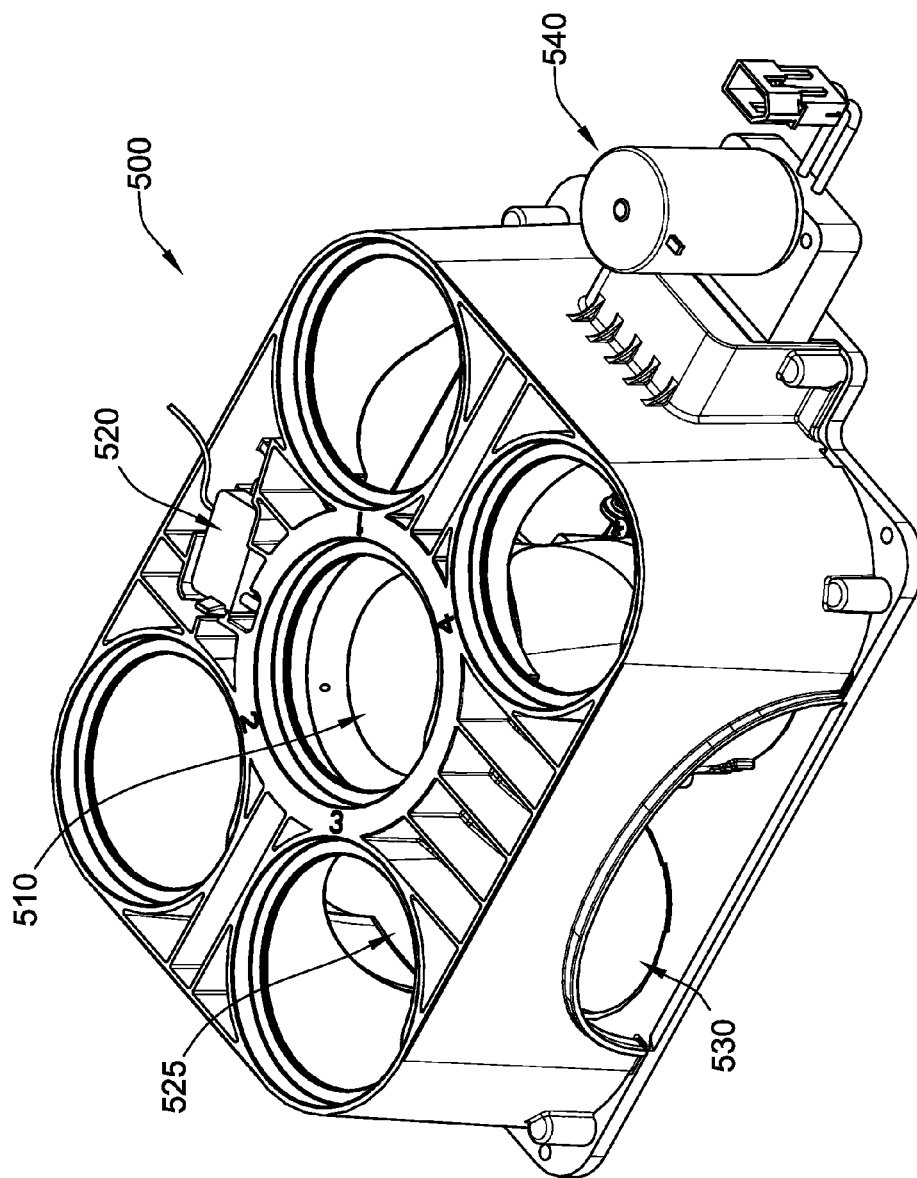


FIG. 19

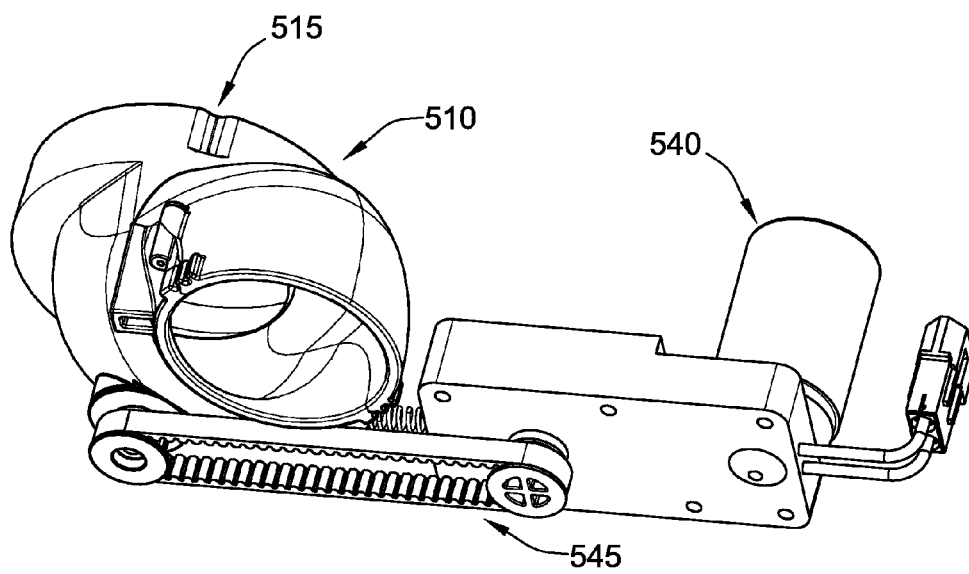
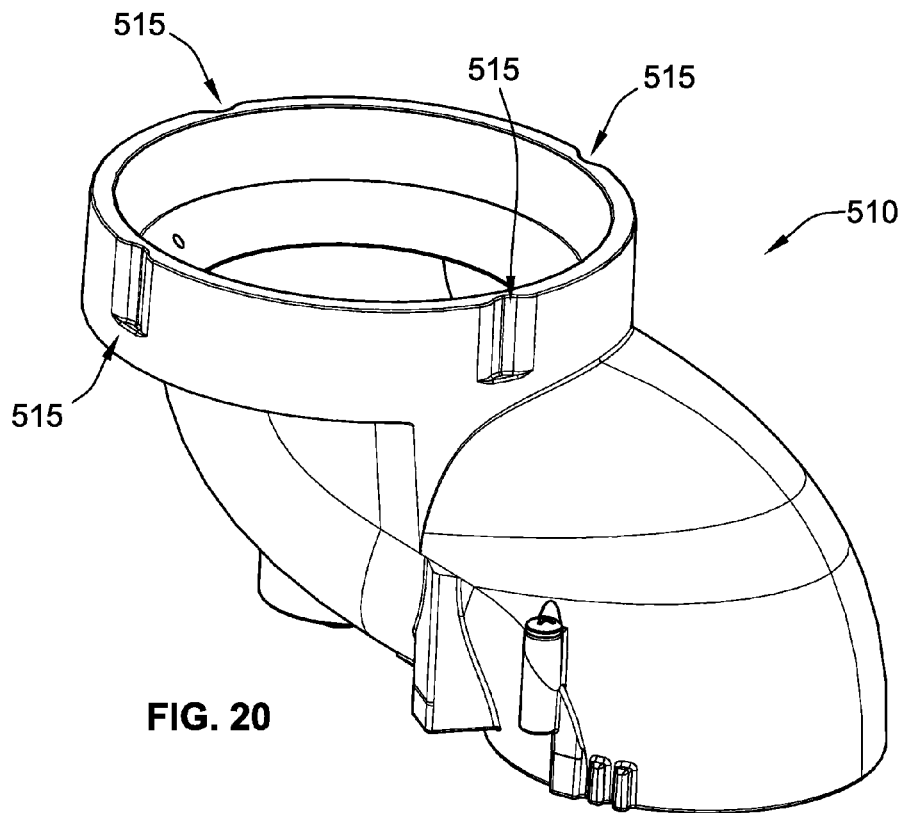


FIG. 21



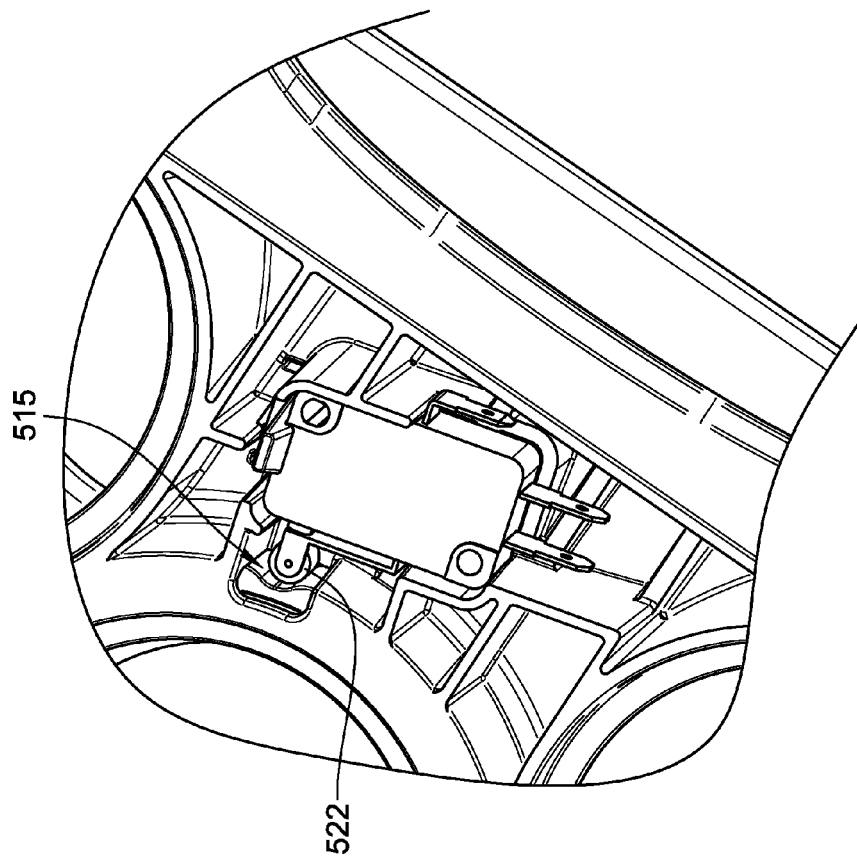


FIG. 22

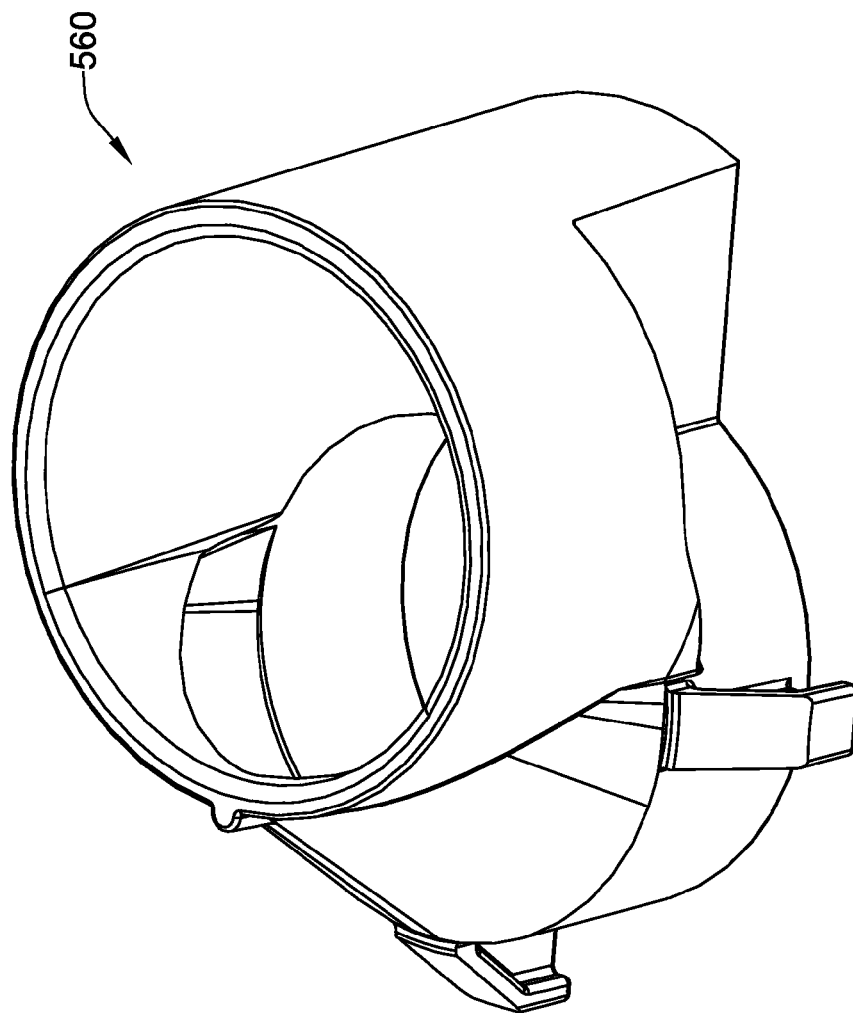


FIG. 23

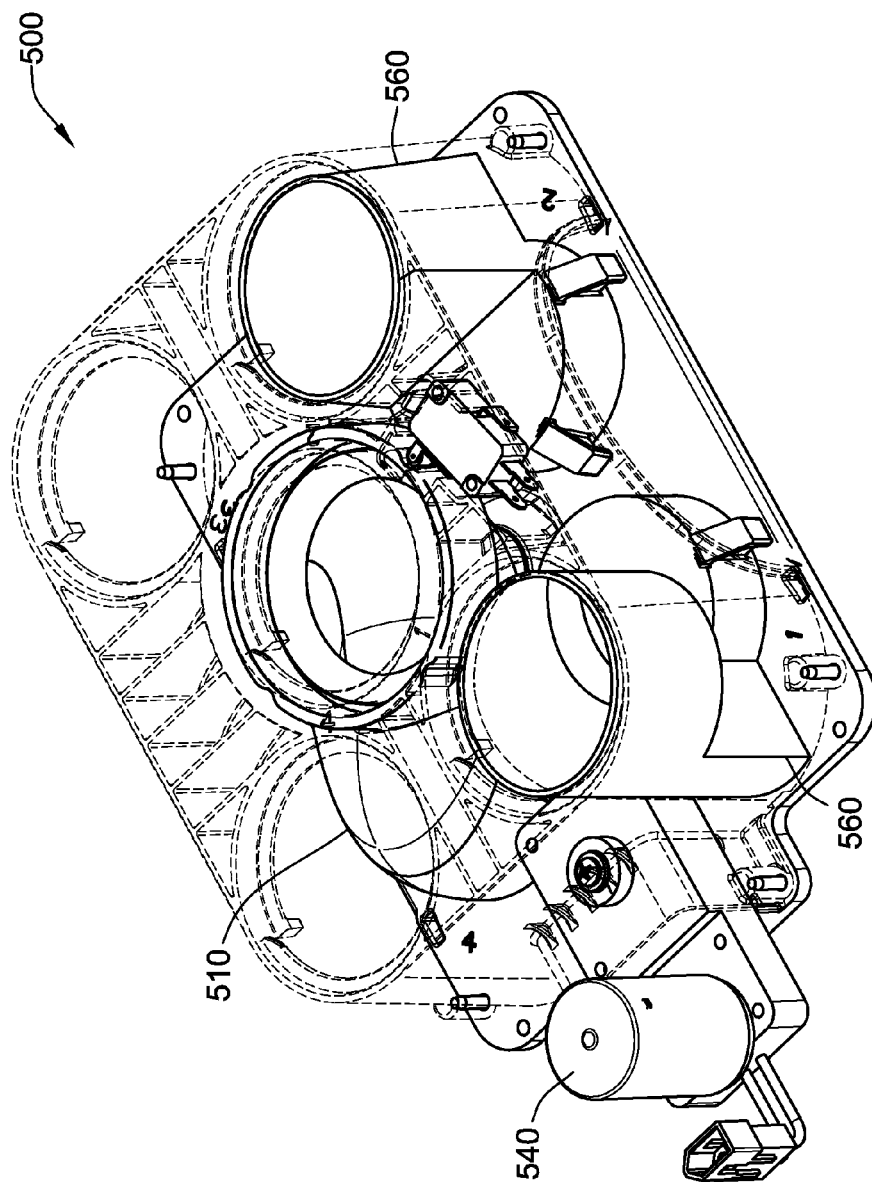
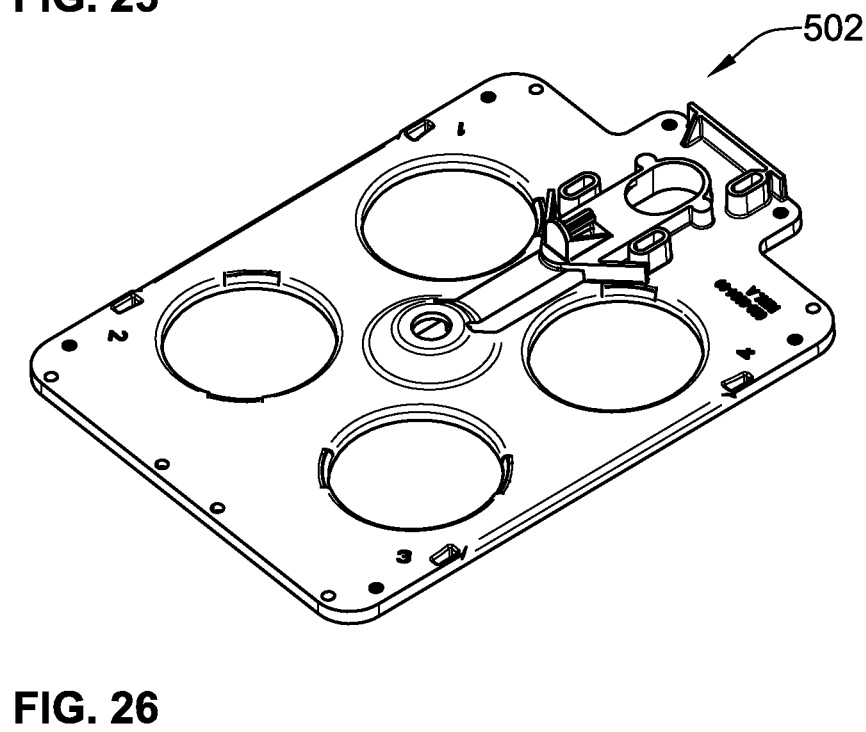
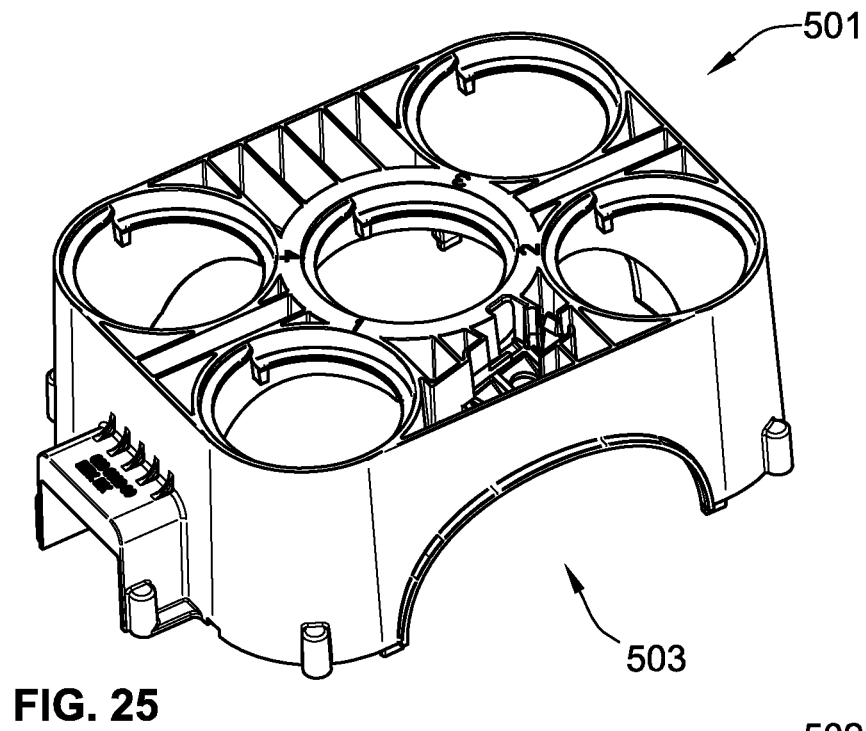


FIG. 24



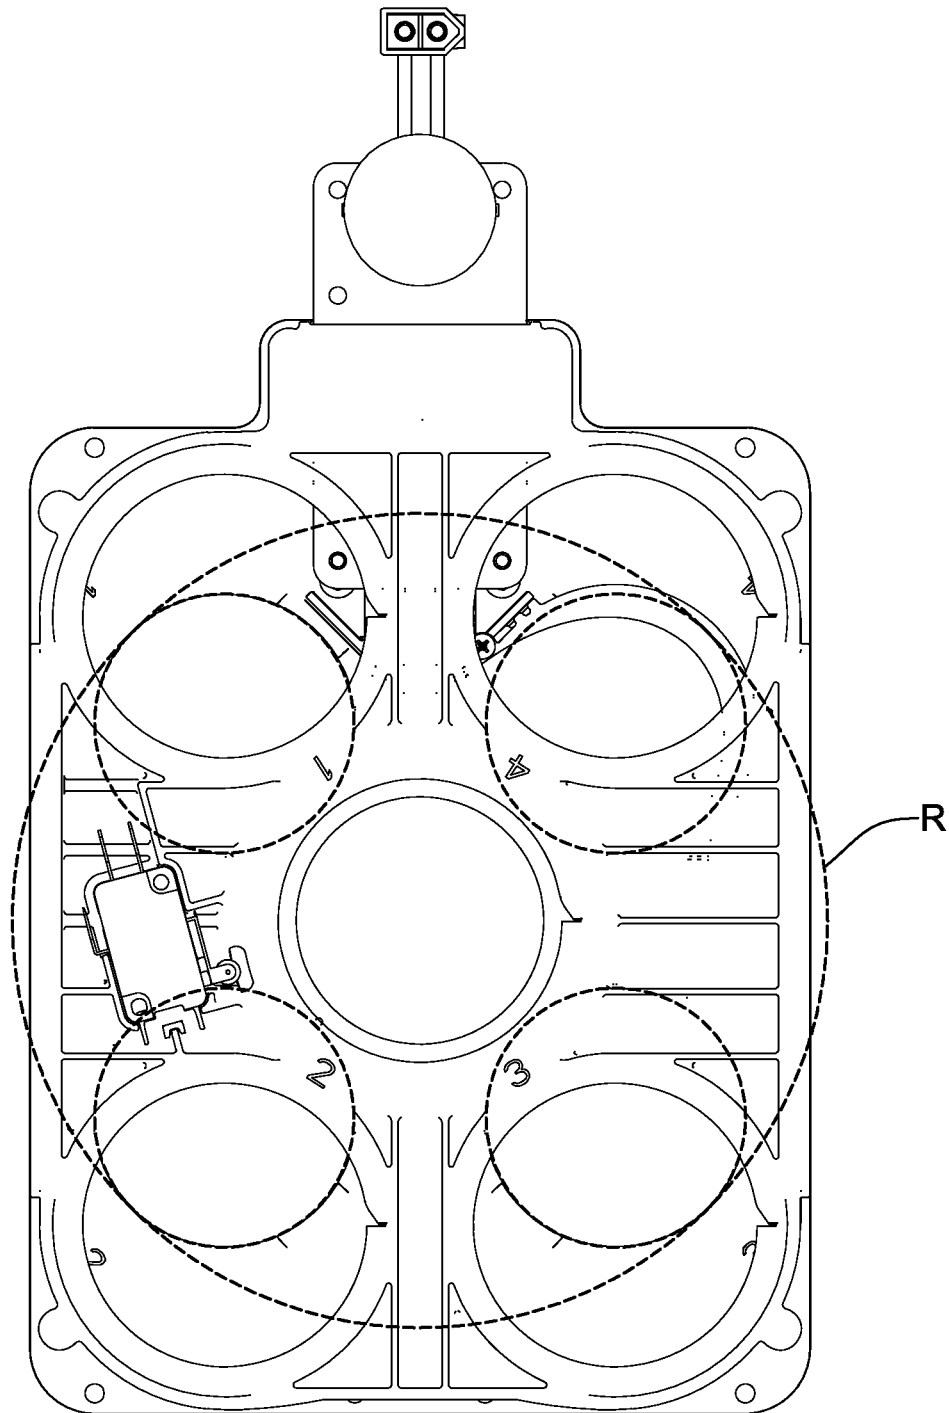


FIG. 27

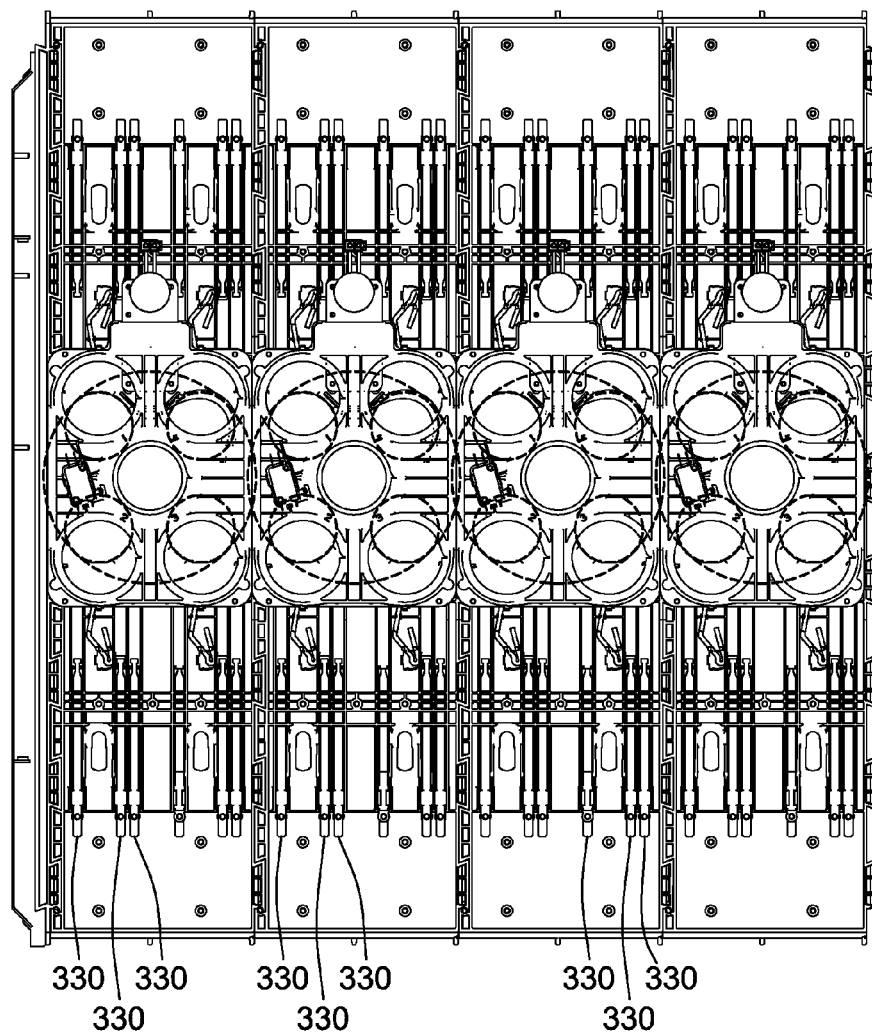


FIG. 28

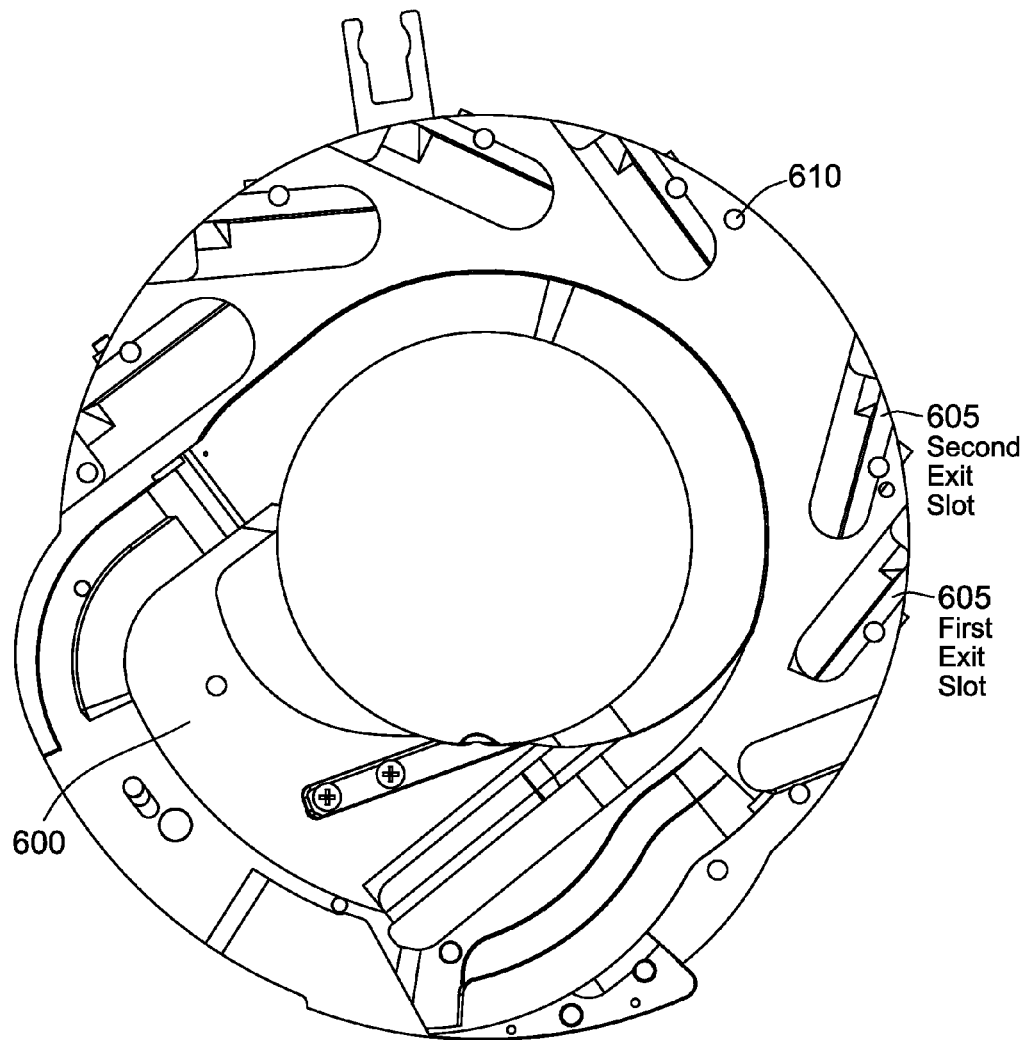


FIG. 29

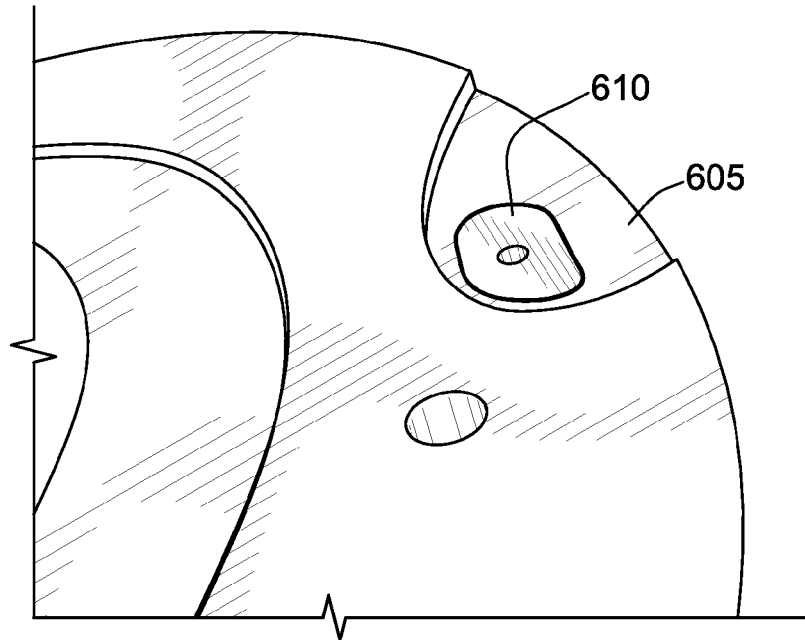


FIG. 30

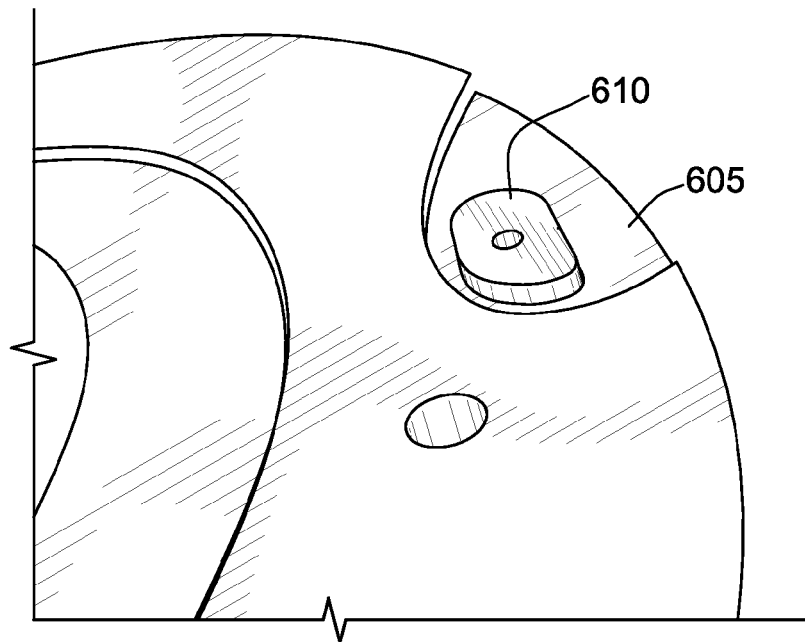
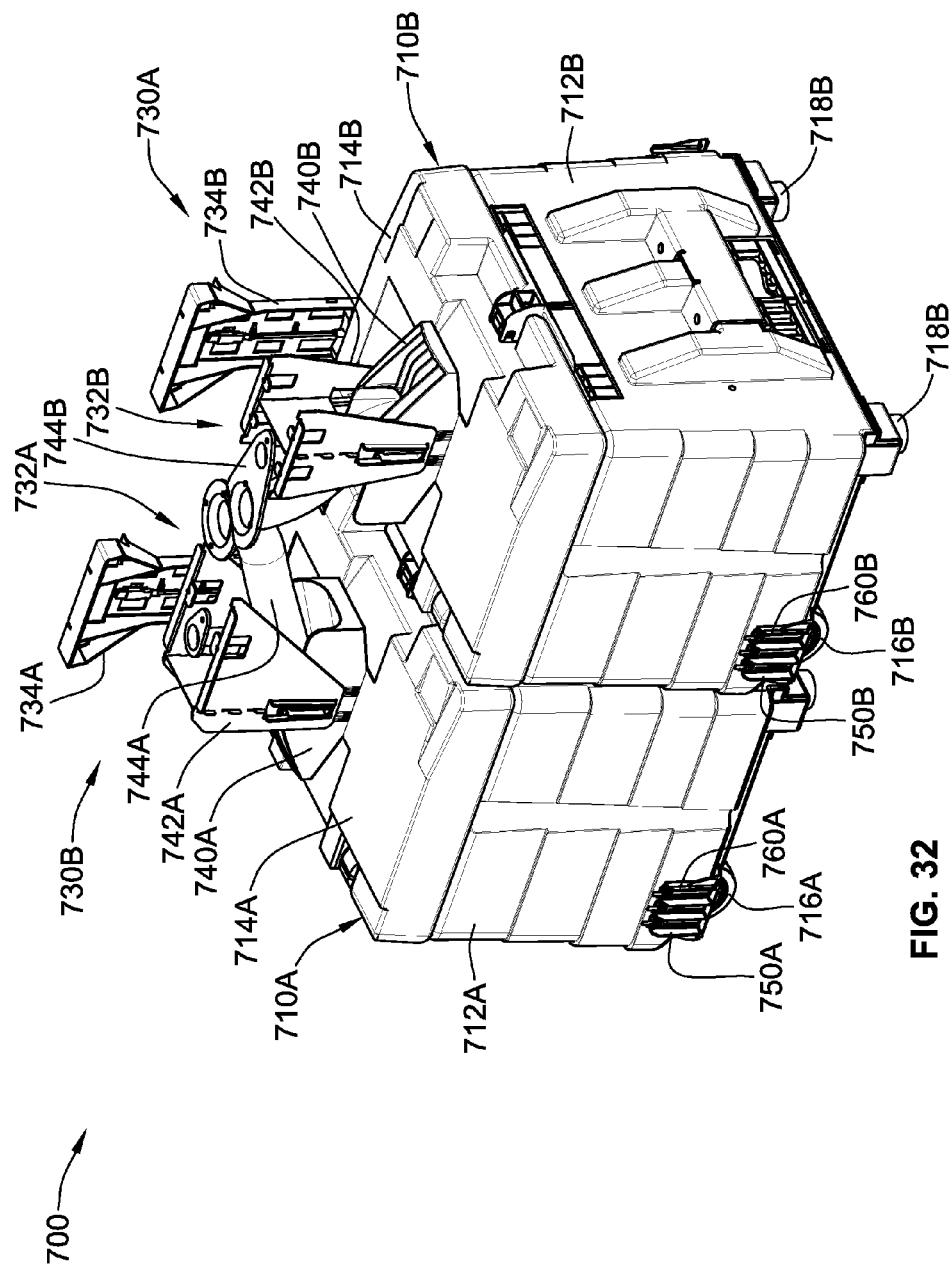
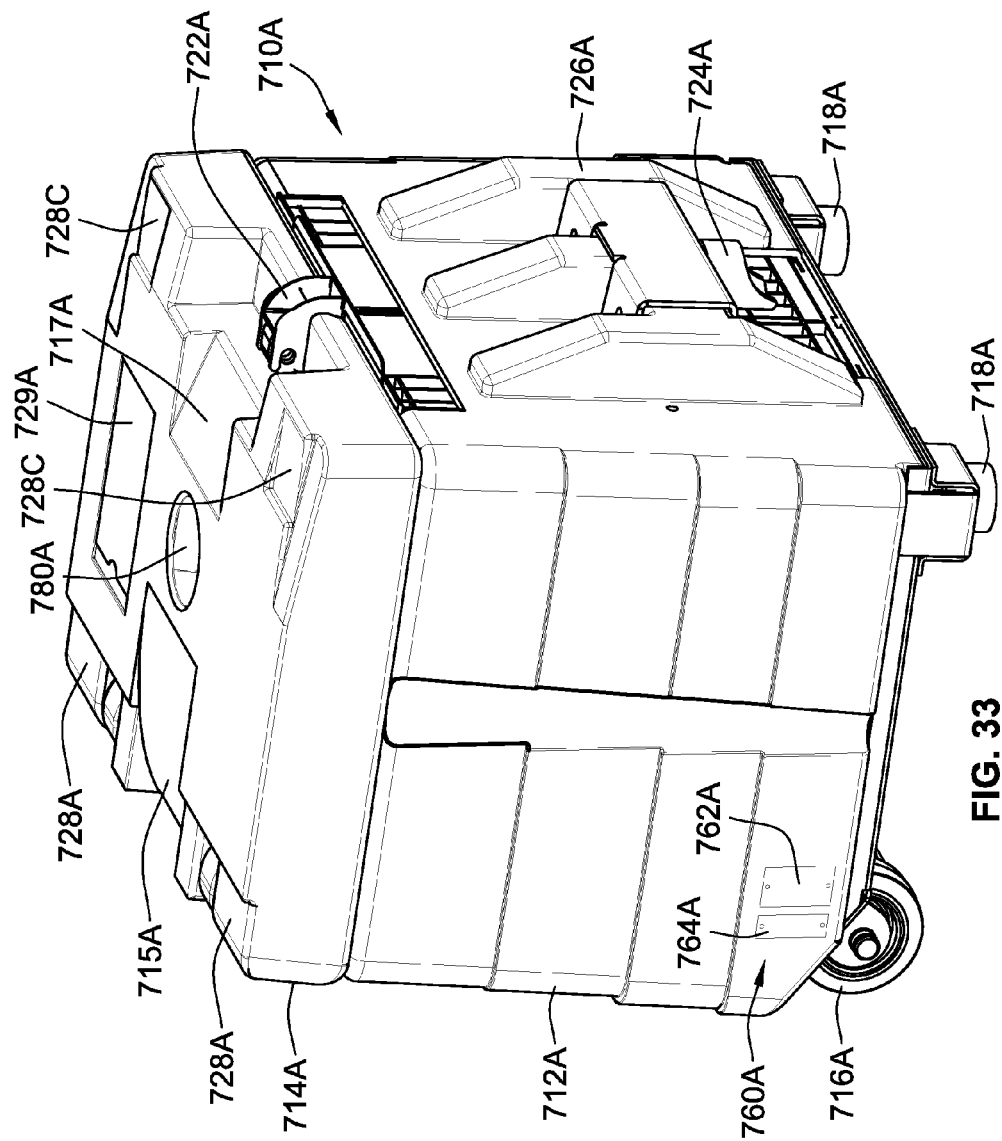


FIG. 31

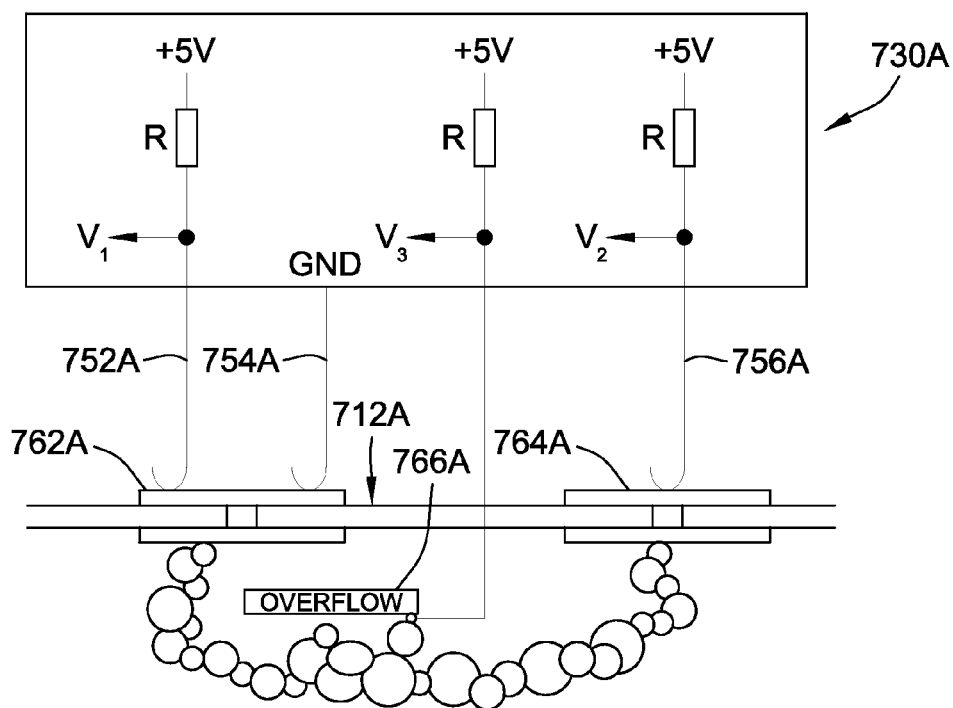
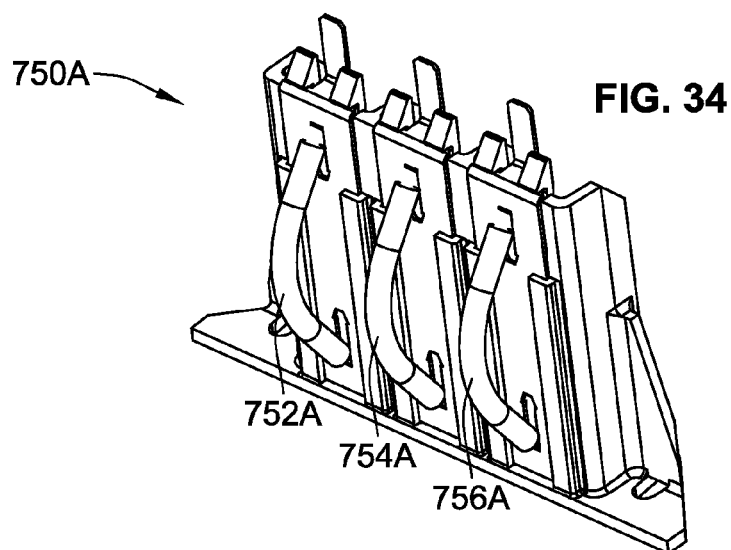




**FIG. 32**



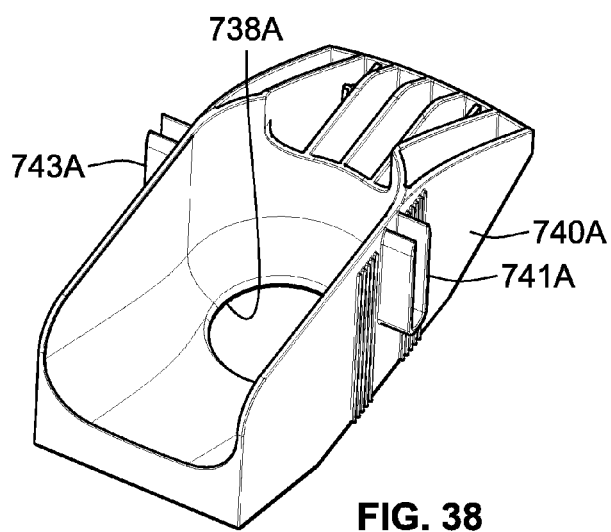


**FIG. 33**

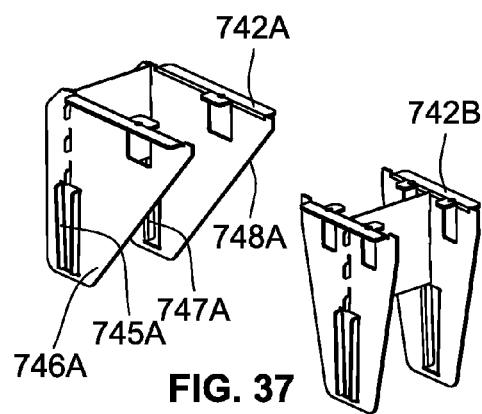

	$V_1$	$V_2$	BIN PRESENT	COIN PRESENT	OVERFLOW	$V_3$
1	5V	5V	OUT	-	-	5V
2	0	5V	IN	ON	-	5V
3	0	0	IN	OFF	NO	5V
4	0	0	IN	OFF	YES	0

**FIG. 35**

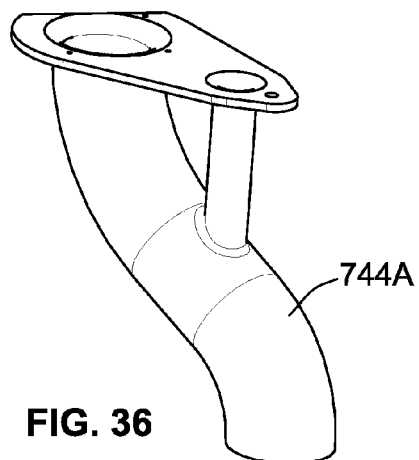

# COIN PROCESSING SYSTEMS, METHODS AND DEVICES

## CROSS-REFERENCE AND CLAIM OF PRIORITY TO RELATED APPLICATIONS

This application is a divisional of U.S. patent application Ser. No. 13/327,900, which was filed on Dec. 16, 2011, and claims the benefit of and priority to U.S. Provisional Patent Application No. 61/424,549, which was filed on Dec. 17, 2010, and U.S. Provisional Patent Application No. 61/506,852, which was filed on Jul. 12, 2011, all of which are incorporated herein by reference in their respective entireties.

## TECHNICAL FIELD

The present disclosure relates generally to systems, methods and devices for processing coins. In particular, aspects of this disclosure relate to coin processing machines and systems that utilize movable and/or removable coin receptacles.

## BACKGROUND

Some businesses, particularly banks, are regularly faced with a large amount of coin currency which must be organized, counted, and recorded. To hand count and record large amounts of coins of mixed denominations requires diligent care and effort, and demands significant manpower and time that might otherwise be available for more profitable and less tedious activity. To make counting of coins less laborious, machines have been developed which automatically sort, by denomination, a mixed group of coins, and discharge the denominated coins into receptacles specific to the various denominations. For example, coin processing machines for processing large quantities of coins from either the public at large or private institutions, such as banks and casinos, have the ability to receive bulk coins from a user of the machine, count and sort the coins, and store the received coins in one or more coin receptacles, such as coin bins or coin bags.

A well-known device for processing coins is the disk-type coin sorter. In one exemplary configuration, the coin sorter, which is designed to process a batch of mixed coins by denomination, includes a rotatable disc that is driven by an electric motor. The lower surface of a stationary, annular sorting head is parallel to and spaced slightly from the upper surface of the rotatable disc. The mixed batch of coins is progressively deposited on the top surface of the rotatable disc. As the disc is rotated, the coins deposited on the top surface thereof tend to slide outwardly due to centrifugal force. As the coins move outwardly, those coins which are lying flat on the disk enter the gap between the disk and the guide plate. The lower surface of the sorting head is formed with an array of exit channels which guide coins of different denominations to different exit locations around the periphery of the disc. The exiting coins, having been sorted by denomination for separate storage, are counted by sensors packed along the exit channel. A representative disk-type coin sorting mechanism is disclosed in U.S. Pat. No. 5,009,627, to James M. Rasmussen, which is incorporated herein by reference in its entirety.

FIGS. 1a-1b show a coin processing device 10 having a pivoting coin input tray 12 configured to hold coins prior to inputting the coins into the coin processing device 10. The coin tray 12 pivots upwardly to cause coins deposited therein to move, under the force of gravity through a hopper, funnel, or chute, into a sorting mechanism (not shown) disposed within a cabinet. The sorting mechanism discharges sorted

coins to a plurality of coin bags (see FIG. 1b) suspended within the cabinet 14, the bottoms of the bags may rest upon a platform 22, or may hang from bag holders 16 attached to a support member of a moveable bag receptacle station 18, which if configured (e.g., via casters 21, etc.) to travel into and out of the housing 14 to facilitate access to coin receptacle sleeves via door 20 by authorized personnel.

FIG. 2 shows an example wherein moveable receptacles 38 are disposed on glide units 31-35 that slide into and out of the housing 30 of the coin processing device. The moveable receptacles 38 comprise coin bag partitions that prevent coins bags disposed in the moveable receptacles from interfering with adjacent coin bags as the coin bags become filled.

FIG. 3 shows an example wherein a coin processing device includes a coin bin 44 disposed within the housing 40 and behind door 46, which is shown in an open position. In this configuration, all of the processed coins are commingled in the coin bin 44. The coin bin 44 is disposed on wheels and includes a handle 42 pivotally attached thereto for pulling the coin bin from within the housing.

U.S. Published Patent Application Serial No. US 2004/0256197, assigned to the assignee of the present disclosure, is incorporated herein by reference in its entirety. U.S. Pat. Nos. 7,188,720 B2, 6,996,263 B2, 6,896,118 B2, 6,892,871 B2, 6,810,137 B2, 6,755,730 B2, 6,748,101 B1, 6,731,786 B2, 6,724,926 B2, 6,678,401 B2, 6,637,576 B1, 6,609,604, 6,603,872 B2, 6,579,165 B2, 6,318,537 B1, 6,171,182 B1, 6,068,194, 6,042,470, 6,039,645, 6,021,883, 5,997,395, 5,982,918, 5,943,655, 5,905,810, 5,865,673, 5,743,373, 5,630,494, 5,564,974, 5,542,880, and 4,543,969, each of which is assigned to the assignee of the present disclosure, and also each of which is incorporated herein by reference in its respective entirety.

## SUMMARY

According to some aspects of the disclosed concepts, a coin processing system is disclosed. The coin processing system includes one or more coin bags and a housing with a coin input area configured to receive a batch of coins. A coin processing unit is operatively coupled to the coin input area and configured to at least one of count, discriminate, sort, and value coins received from the coin input area. A wheeled trolley is removably disposed within the housing. The wheeled trolley includes a base, and a removable coin receptacle sleeve that is supported by the base and configured to receive at least some of the coins output from the coin processing unit. The removable coin receptacle sleeve has an upper portion with a first volume adjacent a lower portion with a second volume, at least the lower portion of the removable coin receptacle sleeve being configured to fit inside the coin bag, at least the upper portion of the removable coin receptacle sleeve being configured to extend out of the coin bag such that a full coin height to which coins can be fed into the removable coin receptacle sleeve is above a bag height of the coin bag.

According to other aspects of the disclosed concepts, a mobile coin receptacle assembly for a coin processing system is presented. The coin processing system has a housing configured to receive a batch of coins, a coin processing unit operable to process coins received by the housing, a coin bag, and a controller with a communication interface. The mobile coin receptacle assembly includes a movable trolley configured to removably insert into the housing of the coin processing system. A coin receptacle sleeve is removably attached to the trolley and supported by the trolley's base. The coin receptacle sleeve is configured to receive through an opening

in an upper portion thereof at least some of the coins output from the coin processing unit. The removable coin receptacle sleeve includes a lower portion adjacent the upper portion. At least the lower portion of the removable coin receptacle sleeve is configured to fit into the coin bag, while the upper portion is configured to extend out of the coin bag such that a full coin height to which coins can be fed into the removable coin receptacle sleeve is above a bag height of the coin bag.

The above summary is not intended to represent each embodiment, or every aspect, of the present disclosure. The above features and advantages, and other features and advantages of the present disclosure, will be readily apparent from the following detailed description of the illustrated embodiments and best modes for carrying out the invention when taken in connection with the accompanying drawings and appended claims.

### BRIEF DESCRIPTION OF THE DRAWINGS

FIGS. 1a and 1b are alternate views of a representative coin processing machine employing conventional coin bags.

FIG. 2 is a perspective-view illustration of a representative coin processing machine unit employing moveable receptacles.

FIG. 3 is a perspective-view illustration of a representative coin processing machine unit employing a moveable coin bin.

FIG. 4 is a perspective-view illustration of an example of a cable-free bag trolley bearing coin receptacle sleeves in accord with aspects of the present concepts.

FIG. 5 is a perspective-view illustration of an example of a number of cable-free bag trolleys, in accord with FIG. 4, and a coin receptacle sleeve bag logic system with manifold spring contacts functionally interacting with contacts on the receptacle in accord with aspects of the present concepts.

FIGS. 6 and 7 are perspective-view illustrations of examples of manifold spring contacts in accord with aspects of the present concepts.

FIG. 8 is a perspective-view illustration of a representative coin processing device coin receptacle sleeve in accord with aspects of the present concepts, showing conductive members extending along an outside surface of the coin receptacle sleeve from the top to the bottom of the coin receptacle sleeve, on both sides.

FIG. 9 is an alternate perspective-view illustration of the coin receptacle sleeve of FIG. 8, showing a top portion of the conductive members extending along the outside of the coin receptacle sleeve, and further showing an internal handle with manifold spring contacts.

FIG. 10 is an alternate perspective-view illustration of a portion of the coin receptacle sleeve of FIG. 8, showing a deflector in accord with aspects of the present concepts.

FIG. 11 is a side-view illustration of the coin receptacle sleeve of FIG. 8, showing a lower portion of the coin receptacle sleeve having a smaller cross-sectional area than an upper portion of the coin receptacle sleeve.

FIG. 12 is a perspective-view illustration of a coin receptacle sleeve handle in accord with aspects of the present concepts having two exposed metal plates configured to make electrical contact with manifold contacts, such as those shown in FIGS. 6 and 7.

FIGS. 13a-13c illustrate a number of examples of coin receptacle sleeve handles, in accord with aspects of the present concepts, including different configurations (FIGS. 13a-13b) of the two exposed metal plates configured to make electrical contact with the manifold contacts, such as those shown in FIGS. 6-7.

FIG. 14 is a perspective-view illustration of a portion of the trolley base of FIG. 4, in accord with aspects of the present concepts, depicting a molded piece with a pair of spaced electrical contacts connected by a resistor.

FIG. 15 is an underside plan-view illustration of a variety of circuits in the manifold shown in FIG. 5, in accord with aspects of the present concepts.

FIG. 16 is a side cross-sectional view illustration of the manifold and circuits of FIG. 15.

FIG. 17 is a schematic diagram illustrating the logic of the electrical circuits shown in FIG. 15.

FIGS. 18a and 18b are alternate perspective-view illustrations of a coin receptacle sleeve cradle, in accord with aspects of the present concepts, which contacts a coin receptacle sleeve.

FIG. 19 is a perspective-view illustration of a representative configurable manifold component configured to divert coins from an input tube to one of four coin receptacle sleeve inputs in accord with aspects of the present concepts.

FIG. 20 is a perspective-view illustration of an example of a diverter tube in accord with aspects of the present concepts, the diverter tube being rotatably coupled relative to the configurable manifold component of FIG. 19.

FIG. 21 is a perspective-view illustration of a motor with a timing-belt-drive system configured to rotate the diverter tube of FIG. 20 relative to the configurable manifold component of FIG. 19.

FIG. 22 shows an enhanced view of the configurable manifold component of FIG. 19, the rotatably coupled diverter tube of FIGS. 20 and 21, and a limit switch activated by engagement of a limit switch roller with spaced apart recesses in the diverter tube.

FIG. 23 is a perspective-view illustration of an example of a bypass tube, in accord with aspects of the present concepts, that can be used for configurations in which all four stations of the configurable manifold component of FIG. 19 are not the same denomination.

FIG. 24 is a bottom perspective-view illustration of the representative configurable manifold component of FIG. 19, with the outer shell hidden to show two bypass tubes, such as that shown in FIG. 23, disposed in two positions.

FIG. 25 is a perspective-view illustration of the shell of the configurable manifold component of FIG. 19.

FIG. 26 is a perspective-view illustration of the base portion of the configurable manifold component of FIG. 19.

FIG. 27 is a top perspective-view illustration of the configurable manifold component of FIG. 19, showing an example of a path of rotation of the rotatably coupled diverter tube of FIGS. 20 and 21.

FIG. 28 is a top perspective-view illustration showing four adjacent configurable manifold component assemblies in accord with aspects of the present concepts.

FIG. 29 shows an example of a sorting head in accord with aspects of the present concepts.

FIG. 30 is a view of a portion of the sorting head of FIG. 29, shown in a first state with a first exit slot open in accord with aspects of the present concepts.

FIG. 31 is an alternate view of the portion of the sorting head shown in FIG. 30, showing the sorting head in a second state with a first exit slot closed in accord with aspects of the present concepts.

FIG. 32 is a perspective-view illustration of selected components of a representative coin processing system in accord with aspects of the present concepts.

FIG. 33 is a perspective-view illustration of an example of a cable-free coin bin in accord with aspects of the present concepts.

5

FIG. 34 is a perspective-view illustration of an example of a contact spring assembly in accord with aspects of the present concepts.

FIG. 35 is a schematic diagram illustrating the logic of the electrical contacts shown in FIGS. 32-34.

FIG. 36 is a perspective-view illustration of an exemplary coin tube in accord with aspects of the present concepts.

FIG. 37 is a perspective-view illustration of a pair of exemplary mounting brackets in accord with aspects of the present concepts.

FIG. 38 is a perspective-view illustration of an exemplary coin funnel in accord with aspects of the present concepts.

While the invention is susceptible to various modifications and alternative forms, specific embodiments are shown by way of example in the drawings and will be described in detail herein. It should be understood, however, that the invention is not intended to be limited to the particular forms disclosed.

#### DETAILED DESCRIPTION OF THE ILLUSTRATED EMBODIMENTS

While this invention is susceptible of embodiment in many different forms, there are shown in the drawings and will herein be described in detail representative embodiments with the understanding that the present disclosure is to be considered an exemplification of the various aspects and principles of the invention, and is not intended to limit the broad aspects of the invention to the embodiments illustrated. To that extent, aspects and features that are presented, for example, in the Abstract, Summary, and Detailed Description of the Illustrated Embodiments sections, but not explicitly set forth in the claims, should not be incorporated into the claims, singly or collectively, by implication, inference or otherwise.

Referring now to the drawings, wherein like reference numerals refer to like features throughout the several views, FIG. 4 shows a trolley system 100 implementable with a bag logic system in accord with at least some aspects of the present concepts. As will be developed in further detail below, each cable-free trolley system (or "wheeled trolley") 100 functions as a mobile coin receptacle for receiving coins from a coin processing device (represented herein by the manifold 140 portrayed in FIG. 5), which may include any of the disk-type coin sorters described above, the coin processing devices set forth in the patents incorporated herein by reference, or any other now known or hereinafter developed coin processing device. The trolley system 100 can also operate to stow and/or transport coins received from the coin processing device 140, which will also be developed further below. In accord with aspects of the present disclosure, a coin processing system is defined, at least in part, by the trolley system 100 and coin processing device 140. Although the trolley system 100 reflects one embodiment of the present concepts, the aspects described herein are implementable without a trolley and the provision of the trolley is not to be construed to be a limitation on the concepts disclosed herein.

The trolley system 100, when in at least one of a number of predetermined orientations, can wirelessly communicate information to a communication interface of a controller of the coin processing unit. As used herein, "wirelessly communicate" is inclusive of, but not exclusive to, the transmission of information signals between two devices without the use of connecting hardline or wired interfaces between the two devices. By way of example, and not limitation, the bag logic system of FIG. 4 utilizes a number of electrically conductive interfaces for communicating information between one or more mobile coin receptacles 100 (e.g., FIGS. 4 and 5) and a controller 150 of a coin processing system (e.g., FIG. 5). For

6

instance, the wheeled trolley 100 can include at least one, and in some embodiments a (first) plurality of electrical contacts, which may comprise, singly and in any combination, electrical contacts 300 (also referred to herein as "first electrical contact(s)") on the trolley base 110, as best seen in FIG. 14, electrical contacts 310 (also referred to herein as "third electrical contact(s)") on the coin receptacle sleeve 120, as best seen in FIGS. 4, 5 and 8, and electrical contacts 320 (also referred to herein as "fourth electrical contact(s)") on the coin receptacle sleeve handle 130, as shown in FIGS. 9 and 12-13c. The coin processing system, in turn, can also include at least one, and in some embodiments a (second) plurality of electrical contacts, which may comprise manifold springs 330 (also referred to herein as "second electrical contact(s)") attached to a stationary manifold 140. The electrical contacts 320 on the coin receptacle sleeve handle 130 are packaged to electrically contact with the conductive manifold springs 330, which are best seen in FIGS. 5-7, 15-16 and 28. As an aside, the use of "first," "second," "third," "fourth," "fifth," etc. in the specification and claims is not intended as limiting and therefore should not be construed as such.

Utilizing the arrangement shown in FIG. 4, the bag logic system can be configured to determine if one or more coin receptacle sleeves 120 are in the correct position (e.g., properly oriented to receive processed coins from a coin processing device), if a substantially non-conductive coin bag 170 (e.g., formed entirely or in part from cloth, such as canvas, or plastic and other polymers, such as vinyl and nylon, etc.) is disposed over or otherwise operatively attached to the coin receptacle sleeve 120, whether there are coins and/or a predetermined level of coins in the coin receptacle sleeve 120, or any combination thereof. All powered electronic components can therefore be located on the stationary manifold 140 or at other locations in the housing, while allowing the trolley module 110 to be electrical cable-free. In this vein, the various components disposed on the trolley 110 can be limited to only provide an electrical path when the trolley and components borne thereby are properly positioned. In this configuration, the coin bag containment system noted above and elsewhere herein, in combination with a coin bag disposed over the bottom portion of the coin receptacle sleeve 120, delivers all needed bag logic features while eliminating the need for a trailing cabling (e.g., ribbon cables, umbilicals, etc.) and batteries or other power sources for on-board electronic components.

In normal operation, each of the coin receptacle sleeves 120, or a predetermined portion thereof, is placed inside of a coin bag to keep coins within a designed volume during filling of the coin bag. In effect, the coin receptacle sleeve 120 acts as an internal armature, providing an otherwise non-rigid coin bag with a generally rigid internal geometry. By filling into a substantially constant or a constant geometry, bag storage efficiency has been determined to increase from 12 bags (e.g., 6 side-by-side trolleys) to 16 bags (e.g., 8 side-by-side trolleys) in the same sized cabinet (e.g., same footprint) that would normally house a single coin bin (which typically holds about the equivalent of about 9-10 coin bags) or a plurality of coin bags (typically about 6 coin bags). A "coin bag," as used herein, may be defined to consist of a single, standard-size Federal Reserve coin bag. In some non-limiting examples, a standard-size Federal Reserve coin bag holds at least approximately \$50.00 in pennies, at least approximately \$200.00 in nickels, at least approximately \$1000.00 in dimes, or at least approximately \$1000.00 in quarters, such as is set forth in the Federal Reserve "Operating Circular 2," issued Jan. 2, 1998, which is incorporated herein by reference in its entirety. Other non-limiting examples include coin bags

which, when laid flat, are approximately 20"×16", approximately 12"×19", approximately 14"×28", or approximately 9"×17.5".

The coin receptacle sleeve **120** has optional features described herein which are used to notify the coin processing machine of fill errors, the presence of coins in the coin receptacle sleeve, etcetera. In at least one aspect, the coin receptacle sleeve omits these notification features. In alternative arrangements, the coin bag may be disposed inside of the coin receptacle sleeve **120** or may be affixed to the coin receptacle sleeve **120** in other manners and by other means.

The coin receptacle sleeves **120** prevent the coins from encroaching on adjacent coin bag space, thus allowing for more bags in a significantly smaller footprint. The coin receptacle sleeve **120** is designed, in some embodiments, to be able to hold coins above the height of the coin bag, so that a full bag of coins can fit into a shape determined to be more efficient. The coin receptacle sleeve **120** constrains coins to a predefined volume and a confined footprint and alleviates previous industry problems of bag overflows while simultaneously increasing coin storage capacity. In one embodiment, the sleeve is 2.75" wide and 12.2" deep at the top opening. In a trolley configuration, two such coin receptacle sleeves **120**, in a tandem configuration, fit into a 3" wide trolley, allowing for eight tandem trolleys to hold 16 sleeves (and 16 bags) in the same space that conventionally would holds 12 coin bags. When the coin receptacle sleeves **120** are full, or otherwise require removal, and the trolley **110** racked out to permit replacement of the full coin bag with an empty coin bag (e.g., when every mixed-coin coin bag in a mixed-denomination configuration is full and the machine needs to be removed from service), an authorized person may simply remove the coin receptacle sleeve **120** to release the coins into the bag. The coin receptacle sleeve **120** is also advantageously, but not necessarily, equipped with electrical contacts **310** which work with the bag logic system to determine correct sleeve placement, bag presence, coin presence, and coin overflow.

The concepts presented herein are not limited to the aforementioned **12** bag (i.e., **12** sleeve) configuration or **16** bag (i.e., **16** sleeve) configuration and may optionally be expanded to more than **16** bags if the height of the sleeve is further increased (thus correspondingly reducing the footprint). For instance, if the footprint of the machine is increased, additional trolleys **110**, coin receptacle sleeves **120**, coin bags, and combinations thereof, may be incrementally added (e.g., **18** bags/sleeves, **20** bags/sleeves, **22** bags/sleeves, etc.). Further, in at least some aspects of the present concepts, the bag logic system disclosed herein may be optionally implemented in combination with (e.g., side-by-side) conventional bag systems, bins, or other coin receptacles. In this vein, the bag logic systems presented herein may optionally be contracted in size to fewer than **12** or **16** bag configurations without departing from the scope and spirit of the present disclosure.

In some embodiments, approximately **16** coin bags can be stowed and filled in a footprint of approximately **6.25** sq. ft. or approximately **0.39** sq. ft. per bag. In other embodiments, approximately **16** coin bags can be stowed and filled within a footprint of approximately **4.67** sq. ft. or approximately **0.29** sq. ft. per bag. Other embodiments can include a **16** coin bag system with a bag storage footprint of approximately **3-8** sq. ft. or, in some embodiments, approximately **4-7** sq. ft. or, in some embodiments, **4.5-6.3** sq. ft. The overall cabinet footprint can be approximately **700-800** sq. in. or, in some embodiments, approximately **762** sq. in. In a **16** bag configuration, this would amount to approximately **43.75-50** sq. in. per coin bag or, in some embodiments, approximately **47.62**

sq. in. per coin bag. In some embodiments, the coin sleeve has a top footprint of approximately **20-40** sq. in. or approximately **34.6** sq. in. and a bottom footprint of approximately **20-30** sq. in. or approximately **22.6** sq. in. By offering a greater number of coin bags in the same footprint, a higher return-on-investment can be offered to operators of the machine. For example, increasing the density of coin bags in a single machine allots for a higher total value of coins in a single machine. This, in turn, reduces the frequency of having an armored carrier out to service the machine, thus reducing the operator's expenses.

FIG. **11** shows an example of a coin receptacle sleeve **120** body, illustrating a lower part (or "first portion") of the sleeve having a smaller cross-sectional area than an upper part (or "second portion") of the sleeve **120** so that the sleeve **120** can fit inside of a standard coin bag **170**. As indicated by the reference line labeled "Bag Height," some coin bags are designed so as not to extend to the top of the coin receptacle sleeve **120** and, instead, only rise to a level of the transition of the cross-sectional area of the receptacle sleeve from the smaller cross-sectional area to the larger cross-sectional area. Above the height of the coin bag **170**, the cross-sectional area increases to advantageously give additional coin fill volume to the level indicated by the reference line for "Full Coin Height". At this point, as described below, the coins will complete an overflow circuit sufficient for a signal indicative of an overflow condition to be generated.

FIG. **10** shows a sleeve deflector **125** disposed inside of the top portion of the coin receptacle sleeve **120**. The sleeve deflector **125**, as illustrated, is attached to or otherwise integrated with the top portion of the sleeve **120**, and includes an upper surface that is angled with respect to the opening at the top of the sleeve **120**. The sleeve deflector **125** changes the trajectory of the coins during fill to ensure a more even coin height and to prevent coins from stacking into columns in the chalice area beneath the fill location, thereby accommodating a maximum coin volume.

FIG. **5**, and more particularly FIGS. **15** and **28**, show aspects of a bag logic system in accord with the presently disclosed concepts configured to determine a state of the bag module, the combination of the coin receptacle sleeve **120** and coin bag (not shown) disposed thereover, and annunciate the state of the bag module. The bag logic system, as noted above, monitors correct coin receptacle sleeve **120** position, coin bag presence, coin presence within the correct coin receptacle sleeve **120**, and impending coin overflow from the correct coin receptacle sleeve. In this bag logic system, electrical contacts **330**, **320**, **310**, and **300** on the manifold base **140**, coin receptacle sleeve handle **130**, coin receptacle sleeve **120**, and trolley base **110**, respectively, provide three possible circuits for electric current. Depending on the states of the three circuits, the state of the bag module is known.

FIG. **15** shows one configuration of manifold springs **330** (shown as contacts **330a**, **330b** and **330c**), wherein there are three manifold springs per coin receptacle sleeve **120** position in the manifold base **140**. These manifold springs **330** are fastened into the manifold **140**, for example, using clamping members, such as integrated hinged clamps, to retain and provide a pre-load to the manifold springs. The manifold springs **330** are connected to a processor board (not shown) at one end (i.e., a fixed end) via a multiplexing interface board and are free to move vertically on the opposite end, as indicated by the dual-headed vertical arrow in FIG. **6**. The middle manifold spring (e.g., spring **330b** in FIG. **15**) is at low electrical potential, while the other two manifold springs (e.g., springs **330a**, **330c** in FIG. **15**) representing the bag state



(e.g., bag-on, bag-off, and coin present) and sleeve position (front or back) originate at high electrical potential.

For each coin receptacle sleeve 120 position, there is a wire coil spring 340 that hangs down into the coin receptacle sleeve cavity. This wire coil spring 340, functioning as an overflow spring, is fastened around the manifold spring 330 contact 350, electrically connecting the wire coil spring 340 to the multiplexing interface board and processor board. The free end of the middle manifold spring (at low potential) rests on a lip of the manifold spring contact 350 (at high potential) in a no-sleeve condition (e.g., when a coin receptacle sleeve 120 is not in a proper position). When the coin receptacle sleeve 120 is present and properly positioned, the manifold spring 330 lifts from the manifold spring contact 350, by action of the coin receptacle sleeve 120 handle 130 and breaks the circuit. The circuit would be renewed when the coin receptacle sleeve 120 is removed (e.g., the handle 130 no longer upwardly biases the manifold spring 330) or coins contacting the wire coil spring 340 complete a circuit.

FIGS. 9, as well as FIGS. 12 and 13a-13c, show views of embodiments of coin receptacle sleeve 120 handle 130. The handles 130 keep the top opening of the coin receptacle sleeve at a consistent width while making it easy to remove the sleeve from a full bag of coins and install into an empty coin bag. It also has contacts on its top surface which allow bag logic functionality. To this end, each coin receptacle sleeve 120 handle 130 has two exposed metal plates 320 which make electrical contact with the conductive manifold springs 330. On the underside (i.e., the side of the handle or bottom of the handle), these plates 320 are electrically connected to the coin receptacle sleeve 120 contacts 310, such as is shown in FIG. 12, that run down the sides of the coin receptacle sleeve. As shown in FIGS. 13a-13b, there are two embodiments of coin receptacle sleeve 120 handle 130 plates or contacts 320. One embodiment (FIG. 13a) is configured to substantially simultaneously electrically engage two contacts (bag state and low potential) and the other embodiment (FIG. 13b) is configured to substantially simultaneously electrically engage three contacts: low potential, bag state (bag-on, bag-off & coins present) and position—both at high electrical potential. Correspondingly, there are two embodiments of handle covers, a first embodiment configured to engage with two manifold springs 330 and the other configured to engage with three manifold springs. Correct bag position is verified by an open or closed circuit on the 3<sup>rd</sup> contact.

FIG. 8 shows the coin receptacle sleeve 120 contacts 310 that run down the sides of the coin receptacle sleeve. These coin receptacle sleeve 120 contacts 310 comprise, in the illustrated example, a thin steel strip that runs from the coin receptacle sleeve 120 handle 130, down the length of the coin receptacle sleeve, and hooks underneath the bottom edge of the coin receptacle sleeve 120 contacts 310 to wrap around and engage a bottom interior portion of the coin receptacle sleeve. These bottom portions of the coin receptacle sleeve 120 contacts 310 would, if not covered by a substantially non-conductive material (e.g., a coin bag), electrically contact the contacts 300 on the trolley 110 (see FIG. 14). The contacts 300 shown in the example of FIG. 14 depict the contacts passing through the molded piece, wherein they are electrically connected to one another by a bridge resistor 355. When the coin receptacle sleeve 120 is inserted into the trolley 110, the bridge resistor closes the circuit between the two sleeve contacts 310 if a sleeve is present without a coin bag.

In view of the above, when the trolley 110 is racked in with a coin receptacle sleeve 120 inserted, the coin receptacle sleeve handle 130 raises the middle manifold spring 330b off of the spring contact 350, opening circuit 1, represented in

FIG. 15. With the trolley 110 and coin receptacle sleeve 120 racked in, two manifold springs 330 are in contact with the sleeve handle. If there is no coin bag on the coin receptacle sleeve 120, the coin receptacle sleeve contacts 310 touch the contacts 300 on the base 110 of the trolley 100, forming a circuit through the bridge resistor 355 and the known resistance provides a divided voltage on circuit 2. If there is a bag on the coin receptacle sleeve 120, however, the sleeve contacts 310 are insulated from the bridge contacts 300, and the circuit is open. Thus, if there is a coin bag on the coin receptacle sleeve 120, circuit 2 is open. When the coin receptacle sleeve 120 is filled with coins, the coins bridge the gap between the inside surfaces of the sleeve contacts, closing circuit 2. If the coin level reaches the overflow spring 340, the current from circuit 1 passes through the coins and into overflow spring 340, closing circuit 1.

Accordingly, the following circuit states are presently contemplated:

Circuit 1 Closed: No Sleeve Present

Circuit 1 Closed, Circuit 2 closed (at Voltage C—Coin Present): Overflow

Circuit 1 Open, Circuit 2 Open (Bag is insulator—Voltage A): Sleeve Present, Bag On

Circuit 1 Open, Circuit 2 Closed (Known Resistance—Voltage B): Sleeve Present, No Bag

Circuit 1 Open, Circuit 2 Closed (Short thru Coins—Voltage C): Sleeve Present, Coins Present

Circuit 1 Open, Circuit 3 Open: Sleeve A Present

Circuit 1 Open, Circuit 3 Closed: Sleeve B Present

FIG. 16 is a side-view illustration of the manifold 140 of FIG. 15 shown in cross-section. FIG. 17 shows a schematic of the bag logic, wherein the “Type A” and “Type B” references on the left side of FIG. 17 relate to the two different embodiments of the coin receptacle sleeve 120 handle 130 plates or contacts 320 shown in FIGS. 13a and 13b. The reference of “Machine”, “Sleeve” and “Trolley” on the right side of FIG. 17 represent the coin processing machine, coin receptacle sleeve 120, and trolley 110, respectively.

The aforementioned bag logic system provides a new approach to determining the state of the mobile coin receptacle(s). In other aspects, the bag logic system may monitor, for example, coin receptacle sleeve 120 presence and each coin receptacle sleeve’s unique ID using one of several technologies (e.g., presence and ID is determined by RFID, bar code, sonar, near field communication, Bluetooth, Hall Effect, etc.). For example, an RFID reader or reader/writer (hereinafter collectively “RFID reader” for brevity) (not shown) can be mounted toward the front of the coin processing machine and a RFID device or card (not shown) is fixed to a top portion of the coin receptacle sleeve 120. The RFID reader and device/card are aligned so that as a coin receptacle sleeve 120 is inserted or removed from the machine it passes adjacent the reader/writer to enable, for example, reading of the device/card. As a coin receptacle sleeve 120 passes by, the RFID reader indicates that a coin receptacle sleeve 120 has left the coin processing machine or entered the coin processing machine. The RFID reader also reads the coin receptacle sleeve’s unique ID, allowing for generally tracking of a location of individual coin receptacle sleeves to provide an indication of a status of the machine. Alternatively, the RFID device/card may be disposed on one or more locations of each trolley, so as to, in combination with a stationary RFID reader, enable localization of the trolleys 110. In another aspects, such RFID device/card may be disposed on a coin bin, with location tracking being utilized at different points in the transportation of the coin bin from the coin processing machine to a final destination (e.g., the RFID device/card on a bin can be

11

scanned when it is removed from the coin processing machine and again when it is loaded into an armored car). In a dual bin machine, an RFID reader may be centrally disposed at the front of the coin processing machine to allow it to scan both coin bins. In yet an additional variant, each coin receptacle sleeve **120** (or bin) has disposed thereon a unique barcode and a barcode scanner is utilized to read the barcode as the coin receptacle sleeve **120** is moved relative to the scanner. Thus, when a trolley bearing coin receptacle sleeves is removed from the coin processing machine (or a bin or bins are removed), the barcode is scanned and the coin processing machine tracks the changed status of the coin receptacle sleeves (or bins). In other optional configurations, an RFID tag can also or alternatively be incorporated into one or more of the individual bags. In this instance, the RFID tag can include data pertinent to each specific bag, such as the coin denomination of the bag, a bag serial number, a bag location and other tracking information, the customer name, the origin and destination, a time stamp, any abnormalities during the processing of the coins in the bag, the potential presence of counterfeit currency, etc. This feature is similarly applicable to coin bin implementations.

In at least some aspects, the tracking of the coin receptacle sleeves **120** (or bins) facilitates identification of specific coin receptacle sleeves (or bins) by an attendant attending to the coin processing machine. The intent is to eliminate or mitigate any confusion as to which coin sleeves/bags (or bins) need to be changed so that the attendant doesn't mistakenly change the wrong sleeves/bags (or bins). To this end, the coin receptacle sleeves **120** and/or trolley cradle elements **160** may be color-coded with the rear of the coin receptacle sleeves and/or trolley cradle elements being a different color than the front of the coin receptacle sleeves and/or trolley cradle elements. Further or alternatively, an LED printed circuit board (PCB) can be attached to each sleeve handle to indicate a full bag condition. The LED PCB may comprise a capacitor or battery to provide cable-less operation for relatively short periods of time (e.g., 10 minutes or more). The LEDs may too be color-coded or otherwise marked to indicate separately whether a front and/or rear coin receptacle sleeve **120** is full.

In yet other embodiments, a state of a coin receptacle is optionally determined using an acoustic (e.g., sonar) or electromagnetic (e.g., laser) emitter/receiver mounted in the coin processing machine above each coin receptacle sleeve **120** location (or bin location) and the sound/light used to measure the distance to the nearest object, such as a handle **130** of a coin receptacle sleeve **120**, a coin bin cover if a coin bin is present (and the floor if a coin bin is not present), and/or even an upper level of coins disposed within the coin receptacle sleeve. In another example, Hall effect sensors are optionally mounted in the coin processing machine along a side of each coin bin location and a magnet mounted to or molded on the side of each coin bin provides a field that can be sensed by the Hall effect sensors to determine whether or not a coin bin is present. Alternatively, Hall effect sensors are optionally mounted in the manifold base **140** and magnets are mounted to or molded into the handles **130** of the coin receptacle sleeves **120** to determine whether or not a receptacle sleeves is present.

FIGS. **18a** and **18b** show aspects of trolley cradle elements **160**, with FIG. **18a** showing a front side of a representative trolley cradle element **160** that contacts the coin bag in which the coin receptacle sleeve **120** is disposed, and FIG. **18b** showing a rear side of the trolley cradle element **160**. The trolley cradle elements **160** (also referred to herein as "receptacle sleeve clamps") give structural support to the coin receptacle sleeves **120** when the trolley is racked out of the machine

12

to retain the coin receptacle sleeves in position. The geometry of the trolley cradle elements **160** permits flexibility for sleeve breakaway, if required, and facilitates and guides coin receptacle sleeve **120** insertion. In the illustrated examples, the trolley cradle elements **160** are snap-fit into the trolley **110** base to allow for quick assembly and change of parts as needed. Of course, other conventional mechanical connection devices may be used. The top of the trolley cradle elements **160** are tapered to help guide the coin receptacle sleeve **120** sleeve into the proper position when inserting an empty coin receptacle sleeve (and coin bag disposed thereabout) into the trolley **110**. Conventionally, it is very difficult to install the coin bag and place the coin bag holders into the coin processing machine. The two ribs **161** along the back side of the trolley cradle elements **160** provide rigidity and stability in the longitudinal direction, thereby enabling the trolley cradle elements **160** to transmit a clamping force on the coin receptacle sleeve **120**. As noted above, the geometry of the trolley cradle elements **160** allows these elements to rotate, giving the coin receptacle sleeve **120** the ability to breakaway from the cradle's grasp if hit from the side. This prevents damage from the trolley system in case an attendant accidentally bumps into a racked-out trolley.

FIG. **19** shows a "quad switcher" **500**, a configurable manifold **140** component that can divert coins from one input tube to one of four sleeves. To maintain the three inch bag compartment needed for 8 linear bag stations, the quad switcher has a rectangular shape. This shape causes the diverter tube from one quad switcher to swing inside of an adjacent quad switcher by 0.21" when rotating. However, the quad switcher **500** may assume other geometries if the three inch bag compartment constraint is altered.

The quad switcher **500** has a rotatably-disposed, motorized diverter tube **510** that can direct coins from another coin input tube (not shown) to up to 4 coin receptacle sleeve **120** positions (in the illustrated embodiment) for filling. Individual positions can also optionally bypass the diverter tube **510** for direct filling if necessary (e.g., through upper hold **525** and then lower hole **530** in FIG. **19**). The quad switcher **500**, in the illustrated configuration, is 5.93" wide by 7.50" deep, allowing four adjacent quad switchers **500** to mount to the manifold base **140** and cover **16** bag/sleeve stations. Because of this optional, but presently preferred, packaging requirement, the paths of the diverter tubes **510**, shown by radius **R** in FIG. **27**, overlap. To avoid contact between adjacent diverter tubes **510**, the position of each diverter tube is controlled by the motor **540** (e.g., a DC motor, a stepper motor, etc.) and is determined by mechanical stops and a limit switch **520** that engages with features (e.g. recesses, protuberances, etc.) in the diverter tube at specific locations (e.g., specific angular offsets).

The diverter tube **510** rotates around inside the quad switcher **500** to fill different bags disposed within coin receptacle sleeves **120**. The diverter tube **510** is connected to the motor **540** via a drive system, such as a pulley and belt drive **545** or a gear system. Features **515** in the top portion of the diverter tube **510**, such as dimples on a top edge of the diverter tube, engage with a limit switch to determine an angular position of the diverter tube. The limit switch **520** is activated whenever the roller **522** engages with the dimple **515** in the diverter tube **510**, which are spaced in approximately 90° (e.g., approximately 80-100° intervals in the illustrated example. When the limit switch **520** is active, the diverter tube **510** is aligned correctly above a coin bag/sleeve station. Optionally, an encoder may be utilized to resolve the angular position of the diverter tube **510** relative to the manifold.

13

Bypass tubes **560**, an example of which is shown in FIG. **23**, are used for configurations in which all four stations are not the same denomination. For example, the diverter tube **510** can fill stations **1**, **2**, and **3** with pennies while a separate manifold tube feeds another station with another denomination. FIG. **24** shows an example wherein the quad switcher **500** includes bypass tubes **560** in positions **1** and **2**.

FIG. **25** depicts a shell or housing **501** of the “quad switcher” **500**, the structure of the housing **501** defining locations for the bypass tubes **560**, defining a recess or station for the limit switch **520**, and acting as an upper bearing for the diverter tube **510** rotationally disposed relative thereto. The housing **501** has five openings, in the version shown, that can receive manifold tubes—one for each of the four possible bypass tube locations and one in the center for the diverter tube. A base portion **502** of the “quad switcher” **500** is shown in FIG. **26**. the base portion **502** comprises a generally flat, rigid part on which the motor **540**, diverter tube **510**, and housing **501** can be releasably mounted (e.g., through snap fittings, male/female connectors, etc.). Positioning holes may optionally be provided to facilitate assembly. As noted above, the distance from the axis of rotation to the edge of each filling hole is 3.175 inches, so the diverter tube **210** travels in an arc with a diameter greater than the width of the quad switcher **500**. To account for this, openings **503** are defined in the side of the housing **501** to permit the diverter tubes **510** to freely rotate. The positional tracking of the diverter tube **510** further ensures that no two tubes are rotating through the same area at the same time.

FIGS. **29-31** show an example of a sorting head **600** that can direct mixed coin flow into one of two exit slots **605** by activating a motor-driven blocking pin **610** that blocks the first exit slot. The sorting head **600** utilizes, for example, upstream counting (e.g., via a sensor or sensors embedded in the sorting head along a coin path) so that the mixed coins do not have to be mechanically sorted. The first exit slot **605** the coins come to has a motorized pin **610** that can be extended into, or withdrawn from, the exit slot. If the blocking pin **610** is up (e.g., in a contracted non-blocking orientation), all of the coins leave through the first exit slot and, for example, into a designated bin or mixed bag. When the first bin or first half of the mixed bags is full, the blocking pin **610** is introduced into the exit slot (e.g., extended into a blocking orientation) to thereby deflect all of the coins to the second exit slot, which directs them, for example, into the second bin or second half of mixed bags. In alternative arrangements, the sorting head **600** can have greater or fewer than two exit slots. Optionally, each exit slot or only selected exit slots will include a respective blocking pin.

In accord with at least some concepts, a code (e.g., an alphanumeric code, etc.) is printed on consumer transaction receipts to convey machine status to attendants (e.g., cashiers, managers, etc.). If the machine doesn’t itself provide currency to a customer in exchange for input coins, every customer would have to take their receipt from their transaction to a counter or designated machine to redeem it for cash, gift card, etc. On the bottom of the receipt, a code contains information about the status of the machine (e.g., a status of each bag, bag limits, machine errors, and other diagnostic issues), but this information can be deciphered only by an attendant, manager, or other employee that has been trained to read it. In this manner, the attendant can know the status of the machine every time a customer makes a transaction, eliminating the need for the attendant to go to the machine and enter queries into an attendant screen.

In at least some aspects, coins are counted before mechanical sorting. Exit slots can then be controlled to accept differ-

14

ent coins, allowing a universal sorted machine. In current technology, a mix of coins is first sorted mechanically by diameter thickness in discrete exit slots, where the machine counts coins as they pass by a sensor. This requires accurate mechanical sorting, so a different head is needed for every coin set. In accord with aspects of the present concepts, such as the sorting head of FIGS. **29-31**, when counting is performed upstream, sensors in the sorting head measure the diameter and eddy current of coins as they pass by. Using software, these sensors are able to determine what denomination each coin is before it enters an exit slot. Universal exit slots can then be programmed to accept denominations by diameter. The result is a single universal machine that can be built and then programmed to accept any coin set without any mechanical changes.

Further, using such upstream counting technology to count coins may be used to avoid a need to sort the coins for a mixed coin output (mixed bag or bin). Again, using current technology, a mix of coins is first sorted mechanically by diameter and thickness in discrete exit slots, where the machine counts coins as they pass by a sensor. This requires accurate mechanical sorting, so a different head is needed for every coin set. For mixed output machines, the sorted coins are just mixed together again in the manifold. With the upstream counting disclosed herein, the coins are never sorted. Sensors in the sort head measure the diameter and eddy current of individual coins as they pass and software uses these measurements to determine the denomination each coin, which then exits through either a single exit slot (for single bin) or two exit slots (dual bin or mixed bag). Since the coins are not sorted, a single universal machine can be used for any coin set.

Other aspects of the present disclosure may be directed to a trolley-less coin processing system that is implementable with a bag logic system, such as the bag logic system described above with respect to FIGS. **4** and **5**, for example. This coin processing system includes one or more portable coin receptacles for receiving coins from a coin processing device (represented herein by the manifold **140** portrayed in FIG. **5**), which may include any of the disk-type coin sorters described above, the coin processing devices set forth in the patents incorporated herein by reference, or any other now known or hereinafter developed coin processing device. In this regard, the trolley-less system can be functionally and operably configured similar to the embodiments of FIGS. **4** and **5**, for example, to wirelessly communicate information to a controller of a coin processing unit, unless otherwise logically prohibited.

In one optional configuration, the trolley-less coin processing system includes one or more coin receptacle sleeves, which may be similar in function and design and, thus, can include any of the options and alternatives of the coin receptacle sleeves **120** of FIGS. **4**, **5** and **8-11**. In this embodiment, however, at least one of the coin receptacle sleeves (and, in some embodiments, at least eight sleeves) is movable into and out of the coin processing system housing without a wheeled trolley. For example, the coin receptacle sleeve(s) may not be designed to be operatively supported on or moved via a wheeled trolley. Alternatively, the coin receptacle sleeve(s) may only be designed to be operatively supported on or moved via a wheeled trolley once removed from the coin processing system’s housing. Rather, in some embodiments, the coin receptacle sleeves are configured to be carried or otherwise manually transported, e.g., via one or more handles, shoulder straps, etc. In this regard, the manifold or other portion of the coin processing system or housing may be configured to receive, stow and/or operably support each of

15

the coin receptacle sleeves. Some non-limiting examples include configurations with a housing that incorporates one or more channels, guide rails, conveyors, stanchions, locking mechanisms, support structures, etc., singly and in any combination, to receive, support, guide and/or secure the coin receptacle sleeves relative to the output(s) (e.g., configurable manifold 140 component) of the coin processing device. In at least some aspects of the present concepts, the coin receptacle sleeves are configured to permit removal from the housing by sliding the coin receptacle sleeves, and respective coin bag, out of the housing without the benefit of any external devices, such as wheels or rollers, to effectuate the movement of the coin receptacle sleeves and their respective coin bags. It may be desirable, in some embodiments, for the housing to include a base fabricated, at least in part, from acetate resins, such as Delrin®, or similar materials that provide high stiffness, low friction and excellent dimensional stability.

In at least one optional embodiment, the coin processing machine is motion activated, or otherwise is configured to start or respond to a person that passes within or enters a certain zone relative to a user interface device (e.g., one or more lasers, a pressure sensitive pad, etc.).

The display device for the coin processing device advantageously may comprise a 3-D display, and more specifically an autostereoscopic display utilizing autostereoscopic 3D imaging, such as those manufactured by Dimensional Technologies, Inc. of Rochester, N.Y. As another alternative, the display device for the coin processing device may comprise a haptic touch screen display.

In another aspect, the display device may display for the customer a barcode that may then be scanned by the customer using their own cell phone or personal electronic device, where it may then be stored as a virtual gift/loyalty card or optionally sent to someone else. For example, once a 2D barcode is stored in the customer's cell phone, and optionally separately logged into a computer system monitoring redemption activities, a retailer may then use a bar code reader to read the bar code from the customer's cell phone at the point of sale. Thus, a customer at a coin processing machine may elect to redeem their input funds (coins, bills, etc.), value cards, store cards, etc., for a selected gift card (e.g., a Target Gift Card), which they then scan into their cell phone (e.g., using a camera application, using a near field communication, etc.) and that virtual Target Gift Card is then stored in their cell phone. The customer then brings their virtual GiftCard to the store, presents their cell phone display showing the relevant barcode at a point-of-sale location, and the desired amount is applied to the transaction. In another example, the barcode may be used by the customer, when surfing the web on his or her cell phone, to order a product from a company website, and have it shipped to a designated address.

In yet other aspects, the coin processing machine may be optionally equipped for voice communication, via voice-enabled technology, to permit audible instructions in English, Spanish, or any number of other languages, to users who cannot view information on the display device or who would otherwise prefer to interact with the coin processing device using audible cues. Audio jacks may optionally be employed in combination with headsets to enhance a degree of privacy and security to those users desiring audible communication with the coin processing machine.

Turning next to FIG. 32, a representative coin processing system, designated generally at 700, is illustrated in accordance with aspects of the present disclosure. The coin processing system 700 is portrayed herein by a number of representative parts, including first and second wheeled bins

16

710A and 710B, respectively, which are removably lodged in complementary bin stations 730A and 730B. Each bin station 730A, 730B includes a respective floating funnel system 732A and 732B that is mounted to a housing, which is represented herein by a pair of support columns 734A and 734B. The features of the present disclosure are not limited to the two-bin implementation presented in FIG. 32; rather, these features are similarly amenable to coin processing systems with greater or fewer than two wheeled bins and corresponding bin stations. In this regard, only selected components of the coin processing system 700 have been shown and will be described in detail herein. Nevertheless, the coin processing system 700 can include numerous additional components, such as a coin processing mechanism, security doors, input devices, such as a computer-based user interface, a variety of output devices, such as display screens, lighting elements, and audio speakers, many of which are described in the various patents and patent publications already incorporated herein by reference. Seeing as these components are well known in the art, they will not be described in further detail herein.

The wheeled bins 710A, 710B function generally as mobile coin receptacles—receiving coins from a coin processing device, such as the disk-type coin sorter described above, and transporting the received coins to another location. Each wheeled bin 710A, 710B includes a respective box-shaped coin container 712A and 712B with a security lid 714A and 714B that extends across and covers the container 712A, 712B. The coin containers 712A, 712B and security lids 714A, 714B can be fabricated from a variety of rigid and robust materials, including synthetic polymers, such as medium density polyethylene, and metallic materials, such as aluminum or steel. The coin containers 712A, 712B are each supported for movement thereof on a respective pair of laterally spaced casters or wheels 716A and 716B, located at a forward end of the container 712A, 712B. A pair of laterally spaced support stanchions 718A, 718B, are located at a rearward end of the container 712A, 712B on the opposite side of the casters 716A, 716B. In alternative configurations, the wheeled bins 710A, 710B may include greater or fewer than two casters or wheels each. Moreover, the bins 710A, 710B can be designed without wheels and moved via alternative means, such as air bearings, fork lifts, moving dollies, etcetera.

In the illustrated embodiment, the first and second wheeled bins 710A, 710B of FIG. 32 are substantially structurally identical; thus, for brevity and conciseness, additional features of the bins 710A, 710B will be described with respect to the wheeled bin 710A portrayed in FIG. 33. The lid 714A of the wheeled bin 710A includes a centrally located hole 720A through which coins received from the funnel system 732A pass into the coin container 712A. Leading and trailing guide ramps 715A and 717A, respectively, are integrally formed in the lid 714A, disposed on opposing sides of the central hole 720A. Hinged to a forward peripheral edge of the container 712A, the lid 714A can be swung open to provide access to the inside of the container 712, for example, to simplify removal of the contents of the container 712. Conversely, the lid 714A can be swung closed and locked shut, for example, via an optional security latch 722A for securing the contents of the container 712A.

The lid 712A can also be provided with optional structural features for securely supporting another wheeled bin on top of the wheeled bin 710A. In the illustrated embodiment, these features comprise four recessed stacking platforms: a pair of recessed wheel platforms 728A at a forward end of the lid 714A for nesting the wheels of another bin, and a pair of

recessed stanchion platforms **728C** at a rearward end of the lid **714A** for nesting the support stanchions of another bin. The recessed platforms **728A**, **728C** allow for another wheeled bin, such as the second wheeled bin **710B**, to be generally immobilized and securely stacked on top of the first wheeled bin **710A**. The lid **714A** can also be provided with an optional RFID reader or transmitter/receiver for wirelessly communicating, receiving and storing information, as developed in detail above. Moreover, a clean sleeve **729A** for holding and displaying a receipt is situated on the top of the lid **714A** adjacent the coin hole **720A**.

The wheeled bin **710A** is designed to be quickly and easily moved into and out of the bin station **730A**. A socket **724A** projects downward from a hitch chassis **726A** which projects from the rear side of the coin container **712A**. A complementary socket-ball of a cantilevered dolly (not shown) can be inserted into the socket **724A**. The cantilevered dolly provides a mechanical advantage (e.g., 10:1) for lifting the rear end of the container **712A**. By inserting the socket-ball into the socket **724A** and applying a downward force to the opposite end of the cantilevered dolly, a moment arm is applied to the coin container **712A** causing the wheeled bin **710A** to pitch slightly forward off of the support stanchions **718A**, placing the weight of the bin **710A** on the casters **716A** and cantilevered dolly. This allows for the wheeled bin **710A** to be readily wheeled in and out of the bin station **730A**. To prevent damage to sensitive electronics and other equipment in the bin station **730A**, the housing **734A**, **734B** and/or bin **710A** can be provided with means (e.g., a bracket) for limiting the height to which the wheeled bin **710A** can be raised. The aforementioned wheel-and-stanchion arrangement, in combination with the use of the cantilevered dolly, helps to minimize the height of the wheeled bin **710A** in comparison to its conventional counterparts.

The wheeled bins **710A**, **710B**, when properly lodged inside their respective bin stations **730A**, **730B**, can wirelessly communicate information to the housing **734A**, **734B** of the coin processing system **700**. By way of non-limiting example, the bin logic system of FIG. **32** utilizes a number of electrically conductive interfaces for wirelessly communicating information. These electrically conductive interfaces are exemplified in the drawings by two contact blocks **750A** and **750B** (each of which is also referred to herein as “fifth electrical contact(s)”) that are connected to respective bin stations **730A**, **730B**, and two sets of contact plates **760A** and **760B** (each of which is also referred to herein as “sixth electrical contact(s)”) that are connected to respective bins **710A**, **710B**.

In the embodiment illustrated in FIG. **34**, the contact block **750A** includes three electrical contacts—i.e., first, second and third electrically conductive leaf-type contact springs **752A**, **754A**, and **756A**, respectively. The set of contact plates **760A** exemplified in FIG. **33**, on the other hand, includes first and second electrically conductive contact plates **762A**, **764A**. As seen in FIG. **32**, the contact plates **760A**, **760B** are each located at a lower, forward portion on a side wall of a respective coin container **712A** such that when the wheeled bins **710A**, **710B** are functionally lodged inside their respective bin stations **730A**, **730B**, the contact plates **760A**, **760B** align with and electrically couple to a corresponding contact block **750A**, **750B**. In other words, as the first wheeled bin **710A** is moved into the first bin station **730A**, the contact plates **760A** contemporaneously engage the contact block **750A**, sequentially pressing against and deflecting the contact springs **752A**, **754A**, and **756A**. It should be readily recognized that the location and orientation of the contact blocks **750A**, **750B** and contact plates **760A**, **760B** can be

varied from what is shown in the drawings. By way of non-limiting example, the contact plates **760A** could be located on the top of the wheeled bins **710A**, **710B** (e.g., on the lids **714A**, **714B**) to electrically mate with contact blocks **750A**, **750B** located on a corresponding section of the bin stations **730A**, **730B**, such as a bottom surface of one of the floating funnel systems **732A**, **732B**. It is also contemplated that alternative configurations can switch the attachment points of the contact blocks **750A**, **750B** and contact plates **760A**, **760B**, i.e., the contact blocks **750A**, **750B** are attached to the wheeled bins **710A**, **710B** and the contact plates **760A**, **760B** are attached to the bin stations **730A**, **730B**.

FIG. **35** is a schematic diagram illustrating the logic of the electrical contacts presented in FIGS. **32-34**. As previously noted, the contact plates **760A** are designed to press against and electrically connect with one or more of the contact springs **752A**, **754A**, **756A** when the wheeled bin **710A** is properly positioned inside the bin station **730A** underneath the funnel system **732A** to receive therefrom processed coins. Once conductively coupled, these electrically conductive interfaces are operable to communicate information to the bin station **730A**. In this arrangement, described further below, the bin logic system can determine, singly or in combination, whether a wheeled bin **710A** is present inside the bin station **730A** and the coin container **712A** is in the correct position (e.g., properly oriented to receive processed coins from a coin processing device), whether there are coins in the container **712A**, and if there is an overflow of coins out of the coin container **712A**.

With continued reference to FIG. **35**, the bin logic system can determine that a wheeled bin **710A** is present inside (or absent from) the bin station **730A** and, in some embodiments, whether the coin container **712A** is in the correct position for receiving processed coins. This can be accomplished, for example, through synchronous engagement between the first and second contact springs **752A**, **754A** and the first contact plate **762A**. In particular, when the bin **710A** is functionally received by the bin station **730A**, the first contact plate **762A** short circuits (i.e., completes an electrical path between) the first and second contact springs **752A**, **754A** whereby an electrical signal (illustrated as a 5V current) is passed from the first contact spring **752A** to the second contact spring **754A**, which is ground. As indicated in the chart of FIG. **35**, a zero voltage across **V1** is indicative of a bin being present, whereas a voltage signal (e.g., 5V) across **V1** is indicative of a bin being absent from the bin station **730A**. As an aside, the first and second contact plates **762A**, **764A** are illustrated in FIG. **35** as each comprising a tripartite construction with opposing inside and outside bin plates that are attached by electrically conductive fasteners. It should be noted, however, that this arrangement is not critical the functionality of the bin logic system; as such, each of the contact plates **762A**, **764A** of FIG. **35** could just as easily be replaced with a single piece, integrally formed contact plate.

The illustrated bin logic system is also operable to determine whether there are coins present inside the coin container **712A** or, alternatively, whether a predetermined number of coins have been received by the coin container **712A**. This is accomplished, for example, through synchronous engagement between the second and third contact springs **754A**, **756A** and the first and second contact plates **762A**, **762B**. Specifically, when a minimum number of coins (e.g., 500-1000) are present inside the container **712A** (which is portrayed in FIG. **35** for explanatory purposes as “Conductive Coin Mass”) an electrical path is formed such that an electrical signal (illustrated as a 5V current) is passed from the third contact spring **756A**, through the second contact plate **764A**

19

to the first contact plate 762A via the coins, and grounded through the second contact spring 754A. As indicated in the chart of FIG. 35, a zero voltage across V2 is indicative of coins being present inside the coin container 712A.

The bin logic system of FIG. 35 can further determine if there is an overflow situation in the coin container 712A, for example, through the shorting of an "overflow circuit." This can include, for example, the synchronous engagement between the first contact plate 642A, the second contact spring 754A, and an overflow contact plate 766A mounted proximate the hole 720A of the lid 714A. By way of clarification, when the coin container 712A is filled to capacity, coins will begin to flow out of the hole 720A in the lid 714A and eventually touch the overflow contact plate 766A, which is located, in some embodiments, on a bottom surface of the funnel 740A of the floating funnel system 732A. In so doing, the overflowing coins short circuit (i.e., form an electrical path between) the overflow contact plate 766A and the first contact plate 762A whereby an electrical signal (illustrated as a 5V current) is passed from the overflow contact plate 766A and grounded through the second contact spring 754A. As indicated in the chart of FIG. 35, a zero voltage across V3 is indicative of coins overflowing out of the container 712A. As an optional feature, the second contact spring 754A also acts as an electrostatic discharge (ESD) path for grounding static electricity generated by the coins as they discharge into the coin container 712A.

Turning next to FIG. 32, with collective reference to FIGS. 33 and 36-38 as well, each of the bin stations 730A and 730B includes a coin manifold (not shown) with an optional floating funnel system 732A and 732B that hangs downwardly therefrom. Each of the floating funnel systems 732A, 732B comprises a respective coin funnel 740A and 740B that is movably mounted to the coin manifold and configured to direct coins received from the coin processing unit into the coin containers 712A, 712B (e.g., via the opening 720A in the lid 714A) of the wheeled bins 710A, 710B. In the illustrated embodiment, a metal bracket 742A and 742B is utilized to movably mount each of the coin funnels 740A, 740B to the coin manifold, as developed in further detail hereinbelow. A stationary tube 744A and 744B directs coins from a coin processing unit (not shown) via the coin manifold to a respective coin funnel 740A and 740B. A first "upper" end of each stationary tube 744A, 744B is rigidly fastened or otherwise mechanically attached to the coin manifold. On the opposite side of the tube 744A, 744B, the second "lower" end is aligned with, but not directly attached to the coin funnel 740A, 740B. In some embodiments, the diameter of funnel hole 738A is larger than diameter of the second end of the stationary tube 744A, but smaller than the opening 720A in the lid 714A.

In the illustrated embodiment, each of the coin funnels 740A, 740B has at least one degree of translational freedom and at least one degree of rotational freedom. For instance, the coin funnel 740A illustrated in FIG. 38 has a pair of tabs 741A and 743A, each of which projects transversely from and extends generally vertically along a respective side of the funnel 740A. These tabs 741A, 743A are each received in a complementary elongated guide slot 745A and 747A, respectively, that is formed through a corresponding support plate 746A and 748A of the bracket 740A. The aforementioned guide slots 745A, 747A extend vertically such that the coin funnel 740A can translate up and down, as indicated by the vertically oriented dual-headed arrow in FIG. 32. In addition, as seen in FIG. 37, the width of the guide slots 745A, 747A—i.e., narrows from top to bottom, such that the tabs 741A, 743A can pivot inside the guide slots 745A, 747A and, thus,

20

the coin funnel 740A can pitch forward and backward, as indicated by the arcuate dual-headed arrow in FIG. 32. The limits of translation and rotation are defined by the geometry of the translating funnel tracks. The floating funnel systems 732A, 732B may also be provided with an optional swivel mechanism which would allow the funnel 740A, 740B to rotate about a vertical axis.

As mentioned above, leading and trailing guide ramps 715A, 717A are integrally formed in the lid 714A of the bin 710A, each of which is disposed on an opposing side of the central hole 720A. When the wheeled bin 710A is moved into or out of the bin station 730A, the lid 714A will come into contact with the floating funnel system 732A, and one of the guide ramps 715A, 717A will slidably press against and direct the coin funnel 740A to the opening 720A. This contact will cause the translating coin funnel 740A to rise and pivot as needed to clear the top of the bin 710A. The vertically oriented sidewalls of the guide ramps 715A, 717A act as guiding surfaces to ensure that the coin funnel 740A properly aligns with the opening 720A. In addition, the coin funnel's 740A ability to pivot (i.e., pitch backward and forward) ensures that the angle of the guide ramps 715A, 717A complements the underside surface of the coin funnel 740A. In optional arrangements, biasing members, such as helical compression springs, can be employed to bias the coin funnels 740A, 740B downwards. Otherwise, the coin funnels 740A, 740B naturally translate downwards under the force of gravity. When the bin 710A is lowered off the dolly to a final position, the translating coin funnel 740A will lower as well. The rotational freedom of the coin funnel 740A about a lateral axis will permit a surface to surface seal between the funnel 740A and the lid 714A, minimizing or otherwise preventing coin leakage. This rotational freedom helps to ensure a seal that will compensate for a reasonable difference between the angle of the coin processing system 700 and the angle of the bin 710A.

As to some aspects of the disclosed concepts, the spirit of maintaining a wireless connection between the trolley/bin and manifold system is a key element of design. Even though some of the illustrated embodiments do not use wiring that allows for feedback when the trolley/bin is pulled out of the processing machine, that does not preclude the use of wireless sensors (such as intelligent sensors and devices employing spread spectrum signal hopping, such as Bluetooth, to allow for networking of the devices). For instance, an RFID tag can be utilized to provide, for example, a tracking number for managing the trolleys/bins and, in some embodiments, to provide a mechanism for a Close Loop Settlement process, whereby the Coin Processing machine can write the Coin Count Totals and Date and Time to an internal memory of the RFID tag for use at the coin processing center to provide additional levels of coin transfer integrity in the coin processing settlement process.

While many preferred embodiments and best modes for carrying out the present disclosure have been described in detail above, those familiar with the art to which this disclosure relates will recognize various alternative designs and embodiments for practicing the invention within the scope of the appended claims.

What is claimed is:

1. A coin processing system for processing and transmitting coins to one or more coin bags, the coin processing system comprising:

- a housing with a coin input area configured to receive a batch of coins;
- a coin processing unit operatively coupled to the coin input area to receive coins therefrom, the coin processing unit

## 21

being configured to count, discriminate, sort, or value, or any combination thereof, coins received from the coin input area; and

a wheeled trolley removably disposed within the housing, the wheeled trolley including a base and a coin receptacle sleeve supported by and detachable from the base, the coin receptacle sleeve being configured to receive coins output from the coin processing unit and direct the coins into at least one of the coin bags, the coin receptacle sleeve having an upper portion adjacent a lower portion, at least the lower portion of the coin receptacle sleeve being configured to fit inside the coin bag and thereby constrain the coin bag to a predetermined footprint.

2. The coin processing system of claim 1, wherein the coin receptacle sleeve maintains the coin bag in a predetermined shape.

3. The coin processing system of claim 1, wherein at least the lower portion of the coin receptacle sleeve extends approximately the entire length of the coin bag.

4. The coin processing system of claim 1, wherein at least the upper portion of the coin receptacle sleeve is configured to extend out of the coin bag such that a full coin height to which coins can be fed into the coin receptacle sleeve is above a bag height of the coin bag.

5. The coin processing system of claim 1, wherein the wheeled trolley, including the base and the coin receptacle sleeve, is readily detachable from the housing.

6. The coin processing system of claim 5, wherein the coin receptacle sleeve is configured to stay inside the coin bag during and after the wheeled trolley is detached and removed from the housing.

7. The coin processing system of claim 1, wherein the coin receptacle sleeve includes one or more electrical interfaces configured to help determine if the coin receptacle sleeve is in a desired position.

8. The coin processing system of claim 1, wherein the coin receptacle sleeve includes one or more electrical interfaces configured to help determine if the coin bag is operatively attached to the coin receptacle sleeve.

9. The coin processing system of claim 1, wherein the upper portion has a first cross-sectional area and the lower portion has a second cross-sectional area smaller than the first cross-sectional area.

10. The coin processing system of claim 1, wherein the coin receptacle sleeve includes an elongated tubular body with a first opening having a first size at an upper end of the tubular body, and a second opening having a second size at a lower end of the tubular body, the first size being larger than the second size.

11. The coin processing system of claim 1, wherein the predetermined footprint is approximately 3 inches wide or less.

12. The coin processing system of claim 1, wherein the coin bag is not rigid, and wherein the coin receptacle sleeve is configured to provide a generally rigid internal geometry to the non-rigid coin bag.

13. The coin processing system of claim 1, wherein the coin receptacle sleeve includes a sleeve deflector configured to change a trajectory of the coins received from the coin processing unit.

14. The coin processing system of claim 1, wherein the coin receptacle sleeve includes a handle extending across an opening in the top of the coin receptacle sleeve, the handle being configured to maintain the opening at a constant width.

15. The coin processing system of claim 1, wherein the wheeled trolley includes one or more receptacle sleeve

## 22

clamps configured to secure the coin receptacle sleeve to the base and support the coin receptacle sleeve in an upright position.

16. The coin processing system of claim 1, wherein the wheeled trolley includes a plurality of coin receptacle sleeves, the coin processing system further comprising a coin diverting mechanism configured to switchably direct coins received from the coin processing unit to a selected one or ones of the plurality of coin receptacle sleeves.

17. The coin processing system of claim 16, wherein the coin diverting mechanism includes a driving mechanism coupled to a rotatable diverter tube, the driving mechanism being configured to selectively rotate the diverter tube between a plurality of sleeve positions, wherein, at each of the sleeve positions, coins received by the coin diverting mechanism pass through the diverter tube into the selected one of the plurality of coin receptacle sleeves.

18. The coin processing system of claim 17, wherein the coin diverting mechanism further includes a limit switch connected to the driving mechanism and configured to engage with positioning features of the diverter tube to regulate the rotation of the diverter tube.

19. The coin processing system of claim 17, wherein the coin diverting mechanism further comprises one or more stationary bypass tubes each of which directs coins received by the coin diverting mechanism past the diverter tube to one of the sleeve positions.

20. The coin processing system of claim 1, wherein the coin processing unit includes a programmable sorting head configured to direct coin flow into a selected one of a plurality of exit slots by activating a motor-driven pin to block another one of the plurality of exit slots.

21. A coin processing system for processing and transmitting coins to one or more coin bags, the coin processing system comprising:

a housing with a coin input area configured to receive a batch of coins;

a coin processing unit operatively coupled to the coin input area to receive coins therefrom, the coin processing unit being configured to count, discriminate, sort, or value, or any combination thereof, coins received from the coin input area; and

a wheeled trolley removably disposed within the housing, the wheeled trolley including a base and a coin receptacle sleeve seated on and detachable from the base, the coin receptacle sleeve being configured to receive at least some of the coins output from the coin processing unit and direct the coins into at least one of the coin bags, the coin receptacle sleeve having an upper portion adjacent a lower portion, at least the lower portion of the coin receptacle sleeve being configured to fit inside the coin bag and thereby constrain the coin bag to a confined footprint, at least the upper portion of the coin receptacle sleeve being configured to extend out of the coin bag such that a full coin height to which coins can be fed into the coin receptacle sleeve is above a bag height of the coin bag.

22. A mobile coin receptacle assembly for a coin processing system having a housing configured to receive a batch of coins, a coin processing unit operable to process coins received by the housing, and a coin bag, the mobile coin receptacle assembly comprising:

a movable trolley configured to removably insert into the housing of the coin processing system, the trolley having a base; and

a coin receptacle sleeve removably attached to the trolley and supported by the base, the coin receptacle sleeve

23

being configured to receive coins output from the coin processing unit and direct the coins into the coin bag, the coin receptacle sleeve including a lower portion adjacent an upper portion, at least the lower portion of the coin receptacle sleeve being configured to fit into the coin bag and thereby constrain the coin bag to a predetermined footprint.

23. The mobile coin receptacle assembly of claim 22, wherein the coin receptacle sleeve maintains the coin bag in a predetermined shape.

24. The mobile coin receptacle assembly of claim 22, wherein at least the lower portion of the coin receptacle sleeve extends approximately the entire length of the coin bag.

25. The mobile coin receptacle assembly of claim 22, wherein at least the upper portion of the coin receptacle sleeve is configured to extend out of the coin bag such that a full coin height to which coins can be fed into the coin receptacle sleeve is above a bag height of the coin bag.

26. The mobile coin receptacle assembly of claim 22, wherein the wheeled trolley and the coin receptacle sleeve are detachable from the housing.

27. The mobile coin receptacle assembly of claim 22, wherein the upper portion has a first cross-sectional area and the lower portion has a second cross-sectional area smaller than the first cross-sectional area.

28. The mobile coin receptacle assembly of claim 22, wherein the coin receptacle sleeve includes one or more electrical interfaces configured to help determine if the coin receptacle sleeve is in a desired position.

29. The mobile coin receptacle assembly of claim 22, wherein the coin receptacle sleeve includes one or more electrical interfaces configured to help determine if the coin bag is operatively attached to the coin receptacle sleeve.

30. The mobile coin receptacle assembly of claim 22, wherein the coin bag is not rigid, and wherein the coin receptacle sleeve is configured to slide inside of the coin bag and to provide a generally rigid internal geometry to the coin bag.

31. The mobile coin receptacle assembly of claim 22, wherein the coin receptacle sleeve includes a handle extending across an opening in the top of the coin receptacle sleeve, the handle being configured to maintain the opening at a constant width.

32. The mobile coin receptacle assembly of claim 22, wherein the wheeled trolley includes one or more receptacle sleeve clamps attached to and projecting from the base of the

24

trolley, the one or more receptacle sleeve clamps being configured to attach the coin receptacle sleeve to the base and support the coin receptacle sleeve in an upright position.

33. A mobile coin receptacle assembly for a coin processing system having a housing configured to receive a batch of coins, a coin processing unit operable to process coins received by the housing, and a coin bag, the mobile coin receptacle assembly comprising:

a movable trolley configured to insert into and be removably detached from the housing of the coin processing system, the trolley having a base; and

a coin receptacle sleeve removably attached to the trolley and supported by the base, the coin receptacle sleeve being configured to receive through an opening in an upper portion thereof at least some of the coins output from the coin processing unit and direct the coins into the coin bag, the coin receptacle sleeve including a lower portion adjacent the upper portion, at least the lower portion of the coin receptacle sleeve being configured to fit into the coin bag and thereby constrain the coin bag to a predetermined footprint, the upper portion being configured to extend out of the coin bag such that a full coin height to which coins can be fed into the coin receptacle sleeve is above a bag height of the coin bag.

34. A coin receptacle sleeve for a coin processing machine with a housing having an input area configured to receive a batch of coins, a coin processing unit disposed within the housing and operable to process coins received through the input area, a movable platform disposed in and removable from the housing, and a non-rigid coin bag supported by the movable platform, the coin receptacle sleeve comprising:

a rigid, elongated tubular body configured to seat on and removably attach to the movable platform, the tubular body having an upper portion adjacent a lower portion, a first opening having a first size at an upper end of the tubular body, and a second opening having a second size at a lower end of the tubular body, the first size being larger than the second size, at least the lower portion of the tubular body being configured to fit inside the coin bag and thereby constrain the coin bag to a confined footprint, at least the upper portion of the tubular body being configured to extend out of the coin bag such that a full coin height to which coins can be fed into the tubular body is above a bag height of the coin bag.

\* \* \* \* \*



UNITED STATES PATENT AND TRADEMARK OFFICE  
**CERTIFICATE OF CORRECTION**

PATENT NO. : 8,701,860 B1  
APPLICATION NO. : 13/942892  
DATED : April 22, 2014  
INVENTOR(S) : Blake et al.

Page 1 of 1


It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

On the Title Page

Item (72) Inventors, should read:

--(72) Inventors: **John R. Blake**, St. Charles, IL (US);  
**Curtis W. Hallowell**, Palatine, IL (US);  
**Marianne Krbec**, Wood Dale, IL (US);  
**William J. Jones**, Barrington, IL (US);  
**Thomas P. Adams**, Oconomowoc, WI (US);  
**Glenn S. Gordon**, Buffalo Grove, IL (US)--.

Signed and Sealed this  
Thirty-first Day of January, 2017

A handwritten signature in black ink, reading "Michelle K. Lee". The signature is fluid and cursive, with the first letters of each name being capitalized and prominent.

Michelle K. Lee  
*Director of the United States Patent and Trademark Office*